Legrand cabling system LCS³ cat. 6

flat equipped patch panels

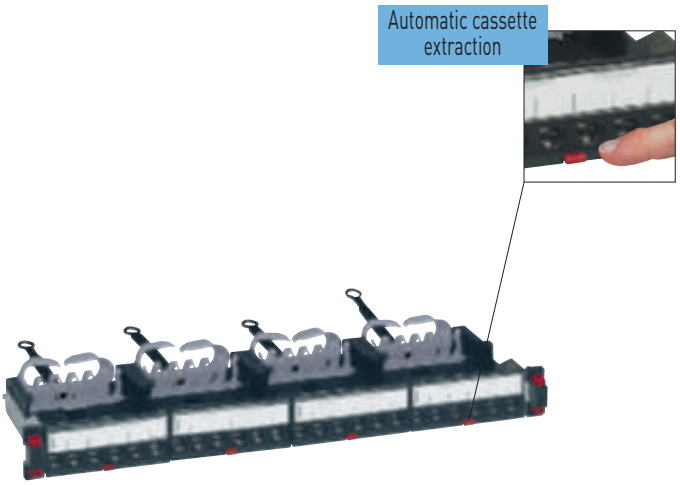

0 337 61

Pack	Cat.Nos	Cat. 6 patch panels equipped with 24 RJ 45 connectors
		Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure Ensure automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance Equipped with 4 cassettes of 6 cat. 6 RJ 45 LCS³ quick-connect connectors (no tools required), with 568 A/B marking Supplied with numbered coloured labels Compliant with ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1 standards 19" panel - 1 U Automatic cassette removal by simple pressure
		Flat panels 24 RJ 45 connectors - 1 U
1	0 337 60	UTP
1	0 337 61	FTP
1	0 337 62	STP

Legrand cabling system LCS³ cat. 6

flat patch panels to be equipped

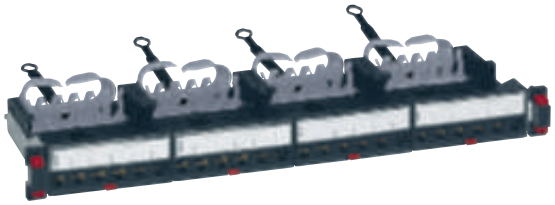

0 337 90

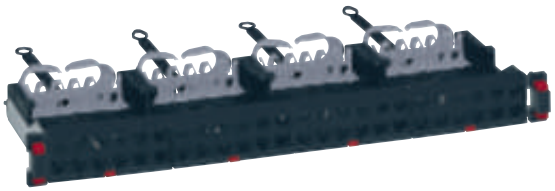

0 337 93

Pack	Cat.Nos	Flat 24-connector patch panels - 1 U to be equipped
		Complete with new generation Quick-Fix for automatic mounting (no screws required) on the risers of cabinets or enclosures Universal mounting on any cabinet or enclosure. Ensure automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance
		Flat panel with empty cassettes to be equipped with connectors Equipped with 4 automatic extraction cassettes for cat. 5e to cat. 8 RJ 45 connectors
1	0 337 90	19" panel - 1 U
		Empty flat panel to be equipped with cassettes Accepts a maximum of 4 automatic extraction cassettes - copper - fibre optic
1	0 337 91	19" patch panel - 1 U

Pack	Cat.Nos	Flat high density 48-connector patch panel - 1 U to be equipped
		Universal mounting on any cabinet or enclosure Ensures automatic earthing of each connector Equipped with rear cable guide to hold the cables during maintenance Automatic cassette removal by simple pressure Possibility of removing each connector individually
1	0 337 93	19" panel - 1 U