


# Viking™ 3 terminal blocks with screw connection

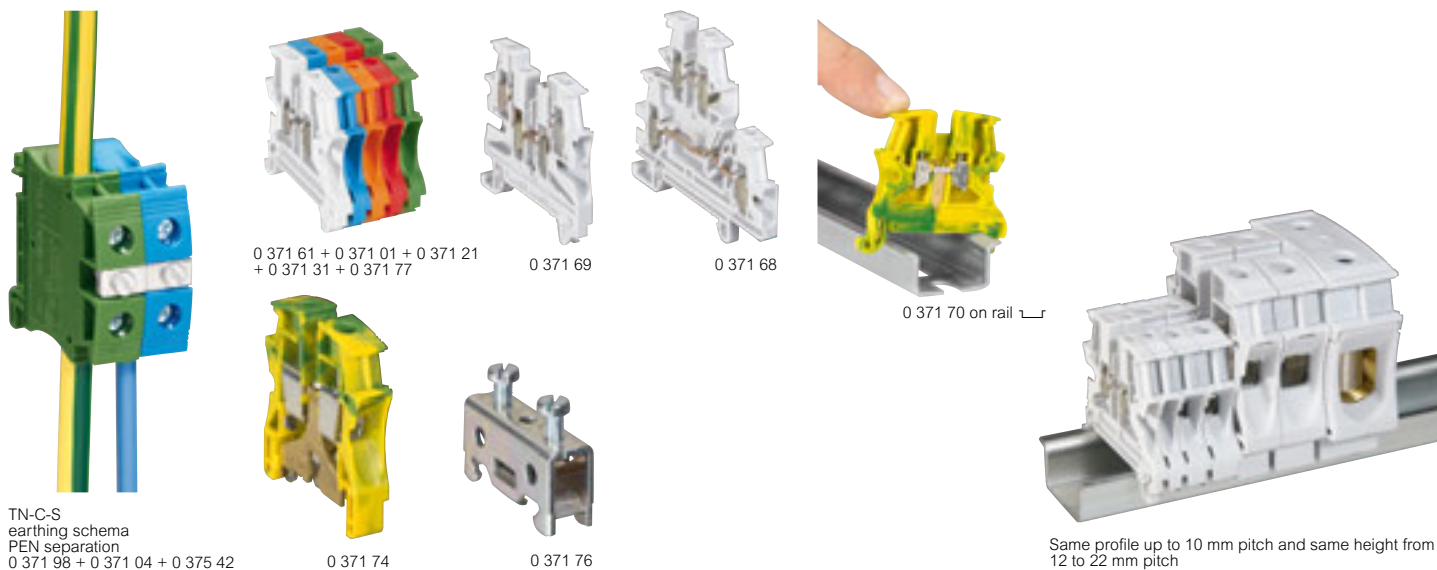

TN-C-S earthing schema  
PEN separation  
0 371 98 + 0 371 04 + 0 375 42

Same profile up to 10 mm pitch and same height from 12 to 22 mm pitch

Technical characteristics p. 307 dimensions see e-catalogue  
Approvals p. 906

Used to make the electrical connection between 2 flexible copper wires with or without ferrules or 2 rigid copper wires  
2 areas for automatic insertion bridging combs up to 8 pitch (upper level only for multi-level blocks)  
For rails depth 15 mm, EN 60715 depth 7.5 mm and 15 mm

Pack	Cat.Nos	Connecting																																																																																																																																																		
		Grey for standard circuit, blue for neutral conductor, orange for circuit not broken by the master isolating device, red for special circuits (safety, protected, etc), green for protection conductor class II equivalent assemblies																																																																																																																																																		
		<b>1 connection - 1 entry/1 outlet</b>																																																																																																																																																		
		<table border="1"> <thead> <tr> <th>Colour</th> <th>Nominal cross-section (mm<sup>2</sup>)</th> <th>Rigid wire (mm<sup>2</sup>)</th> <th>Capacity Flexible wire (mm<sup>2</sup>) with or without ferrules</th> <th>Pitch (mm)</th> </tr> </thead> <tbody> <tr> <td>60</td> <td>0 371 60</td> <td>Grey</td> <td rowspan="3">2.5</td> <td rowspan="3">0.25 to 4</td> </tr> <tr> <td>60</td> <td>0 371 00</td> <td>Blue</td> <td rowspan="3">0.25 to 2.5</td> </tr> <tr> <td>60</td> <td>0 371 20</td> <td>Orange</td> </tr> <tr> <td>60</td> <td>0 371 30</td> <td>Red</td> <td rowspan="3">4</td> </tr> <tr> <td>50</td> <td>0 371 61</td> <td>Grey</td> <td rowspan="3">0.25 to 6</td> <td rowspan="3">0.25 to 4</td> </tr> <tr> <td>50</td> <td>0 371 01</td> <td>Blue</td> </tr> <tr> <td>50</td> <td>0 371 21</td> <td>Orange</td> </tr> <tr> <td>50</td> <td>0 371 31</td> <td>Red</td> <td rowspan="3">6</td> <td rowspan="3">0.25 to 6</td> </tr> <tr> <td>50</td> <td>0 371 77</td> <td>Green</td> </tr> <tr> <td>40</td> <td>0 371 62</td> <td>Grey</td> <td rowspan="3">6</td> <td rowspan="3">0.5 to 10</td> </tr> <tr> <td>40</td> <td>0 371 02</td> <td>Blue</td> </tr> <tr> <td>40</td> <td>0 371 78</td> <td>Green</td> <td rowspan="3">10</td> <td rowspan="3">1.5 to 16</td> </tr> <tr> <td>30</td> <td>0 371 63</td> <td>Grey</td> </tr> <tr> <td>30</td> <td>0 371 03</td> <td>Blue</td> <td rowspan="3">16</td> <td rowspan="3">1.5 to 25</td> </tr> <tr> <td>20</td> <td>0 371 64</td> <td>Grey</td> </tr> <tr> <td>20</td> <td>0 371 04</td> <td>Blue</td> <td rowspan="3">35</td> <td rowspan="3">2.5 to 50</td> </tr> <tr> <td>20</td> <td>0 371 98</td> <td>Green</td> </tr> <tr> <td>20</td> <td>0 371 65</td> <td>Grey</td> <td rowspan="3">70</td> <td rowspan="3">25 to 95</td> </tr> <tr> <td>20</td> <td>0 371 05</td> <td>Blue</td> </tr> <tr> <td>20</td> <td>0 371 99</td> <td>Green</td> </tr> <tr> <td>10</td> <td>0 371 66<sup>1</sup></td> <td>Grey</td> <td>22</td> <td>16 to 70</td> </tr> <tr> <td></td> <td></td> <td><b>1 connection - 2 entries/2 outlets</b></td> </tr> <tr> <td>25</td> <td>0 371 69</td> <td>Grey</td> <td>4</td> <td>0.25 to 6</td> <td>0.25 to 4</td> <td>6</td> </tr> <tr> <td>25</td> <td>0 371 09</td> <td>Blue</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td><b>2 connections on 2 levels</b></td> </tr> <tr> <td>60</td> <td>0 371 67</td> <td>Grey</td> <td>2.5</td> <td>0.25 to 4</td> <td>0.25 to 2.5</td> <td>5</td> </tr> <tr> <td>60</td> <td>0 371 07</td> <td>Blue</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>60</td> <td>0 371 68</td> <td>Grey</td> <td>4</td> <td>0.25 to 6</td> <td>0.25 to 4</td> <td>6</td> </tr> <tr> <td>60</td> <td>0 371 08</td> <td>Blue</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td><b>3 connections on 3 levels</b></td> </tr> <tr> <td>50</td> <td>0 371 51<sup>2</sup></td> <td>Grey</td> <td>2.5</td> <td>0.25 to 4</td> <td>0.25 to 2.5</td> <td>5</td> </tr> </tbody> </table>	Colour	Nominal cross-section (mm <sup>2</sup> )	Rigid wire (mm <sup>2</sup> )	Capacity Flexible wire (mm <sup>2</sup> ) with or without ferrules	Pitch (mm)	60	0 371 60	Grey	2.5	0.25 to 4	60	0 371 00	Blue	0.25 to 2.5	60	0 371 20	Orange	60	0 371 30	Red	4	50	0 371 61	Grey	0.25 to 6	0.25 to 4	50	0 371 01	Blue	50	0 371 21	Orange	50	0 371 31	Red	6	0.25 to 6	50	0 371 77	Green	40	0 371 62	Grey	6	0.5 to 10	40	0 371 02	Blue	40	0 371 78	Green	10	1.5 to 16	30	0 371 63	Grey	30	0 371 03	Blue	16	1.5 to 25	20	0 371 64	Grey	20	0 371 04	Blue	35	2.5 to 50	20	0 371 98	Green	20	0 371 65	Grey	70	25 to 95	20	0 371 05	Blue	20	0 371 99	Green	10	0 371 66 <sup>1</sup>	Grey	22	16 to 70			<b>1 connection - 2 entries/2 outlets</b>	25	0 371 69	Grey	4	0.25 to 6	0.25 to 4	6	25	0 371 09	Blue							<b>2 connections on 2 levels</b>	60	0 371 67	Grey	2.5	0.25 to 4	0.25 to 2.5	5	60	0 371 07	Blue					60	0 371 68	Grey	4	0.25 to 6	0.25 to 4	6	60	0 371 08	Blue							<b>3 connections on 3 levels</b>	50	0 371 51 <sup>2</sup>	Grey	2.5	0.25 to 4	0.25 to 2.5	5
Colour	Nominal cross-section (mm <sup>2</sup> )	Rigid wire (mm <sup>2</sup> )	Capacity Flexible wire (mm <sup>2</sup> ) with or without ferrules	Pitch (mm)																																																																																																																																																
60	0 371 60	Grey	2.5	0.25 to 4																																																																																																																																																
60	0 371 00	Blue			0.25 to 2.5																																																																																																																																															
60	0 371 20	Orange																																																																																																																																																		
60	0 371 30	Red	4																																																																																																																																																	
50	0 371 61	Grey		0.25 to 6	0.25 to 4																																																																																																																																															
50	0 371 01	Blue																																																																																																																																																		
50	0 371 21	Orange																																																																																																																																																		
50	0 371 31	Red	6	0.25 to 6																																																																																																																																																
50	0 371 77	Green																																																																																																																																																		
40	0 371 62	Grey			6	0.5 to 10																																																																																																																																														
40	0 371 02	Blue																																																																																																																																																		
40	0 371 78	Green	10	1.5 to 16																																																																																																																																																
30	0 371 63	Grey																																																																																																																																																		
30	0 371 03	Blue			16	1.5 to 25																																																																																																																																														
20	0 371 64	Grey																																																																																																																																																		
20	0 371 04	Blue	35	2.5 to 50																																																																																																																																																
20	0 371 98	Green																																																																																																																																																		
20	0 371 65	Grey			70	25 to 95																																																																																																																																														
20	0 371 05	Blue																																																																																																																																																		
20	0 371 99	Green																																																																																																																																																		
10	0 371 66 <sup>1</sup>	Grey	22	16 to 70																																																																																																																																																
		<b>1 connection - 2 entries/2 outlets</b>																																																																																																																																																		
25	0 371 69	Grey	4	0.25 to 6	0.25 to 4	6																																																																																																																																														
25	0 371 09	Blue																																																																																																																																																		
		<b>2 connections on 2 levels</b>																																																																																																																																																		
60	0 371 67	Grey	2.5	0.25 to 4	0.25 to 2.5	5																																																																																																																																														
60	0 371 07	Blue																																																																																																																																																		
60	0 371 68	Grey	4	0.25 to 6	0.25 to 4	6																																																																																																																																														
60	0 371 08	Blue																																																																																																																																																		
		<b>3 connections on 3 levels</b>																																																																																																																																																		
50	0 371 51 <sup>2</sup>	Grey	2.5	0.25 to 4	0.25 to 2.5	5																																																																																																																																														

Pack	Cat.Nos	For protection conductor																																															
		Metal base																																															
		<b>1 connection - 1 entry/1 outlet</b>																																															
		Screwless fixing on rail up to 10 mm pitch and with screws for pitch 12 and 15 mm PEN from 10 mm <sup>2</sup>																																															
		<table border="1"> <thead> <tr> <th>Colour</th> <th>Nominal cross-section (mm<sup>2</sup>)</th> <th>Rigid wire (mm<sup>2</sup>)</th> <th>Capacity Flexible wire (mm<sup>2</sup>) with or without ferrules</th> <th>Pitch (mm)</th> </tr> </thead> <tbody> <tr> <td>60</td> <td>0 371 70</td> <td>Green/yellow</td> <td>2.5</td> <td>0.25 to 4</td> <td>0.25 to 2.5</td> <td>5</td> </tr> <tr> <td>50</td> <td>0 371 71</td> <td>Green/yellow</td> <td>4</td> <td>0.25 to 6</td> <td>0.25 to 4</td> <td>6</td> </tr> <tr> <td>40</td> <td>0 371 72</td> <td>Green/yellow</td> <td>6</td> <td>0.5 to 10</td> <td>0.25 to 6</td> <td>8</td> </tr> <tr> <td>30</td> <td>0 371 73</td> <td>Green/yellow</td> <td>10</td> <td>1.5 to 16</td> <td>2.5 to 10</td> <td>10</td> </tr> <tr> <td>10</td> <td>0 371 74</td> <td>Green/yellow</td> <td>16</td> <td>1.5 to 25</td> <td>4 to 16</td> <td>12</td> </tr> <tr> <td>10</td> <td>0 371 75</td> <td>Green/yellow</td> <td>35</td> <td>2.5 to 50</td> <td>4 to 35</td> <td>15</td> </tr> </tbody> </table>	Colour	Nominal cross-section (mm <sup>2</sup> )	Rigid wire (mm <sup>2</sup> )	Capacity Flexible wire (mm <sup>2</sup> ) with or without ferrules	Pitch (mm)	60	0 371 70	Green/yellow	2.5	0.25 to 4	0.25 to 2.5	5	50	0 371 71	Green/yellow	4	0.25 to 6	0.25 to 4	6	40	0 371 72	Green/yellow	6	0.5 to 10	0.25 to 6	8	30	0 371 73	Green/yellow	10	1.5 to 16	2.5 to 10	10	10	0 371 74	Green/yellow	16	1.5 to 25	4 to 16	12	10	0 371 75	Green/yellow	35	2.5 to 50	4 to 35	15
Colour	Nominal cross-section (mm <sup>2</sup> )	Rigid wire (mm <sup>2</sup> )	Capacity Flexible wire (mm <sup>2</sup> ) with or without ferrules	Pitch (mm)																																													
60	0 371 70	Green/yellow	2.5	0.25 to 4	0.25 to 2.5	5																																											
50	0 371 71	Green/yellow	4	0.25 to 6	0.25 to 4	6																																											
40	0 371 72	Green/yellow	6	0.5 to 10	0.25 to 6	8																																											
30	0 371 73	Green/yellow	10	1.5 to 16	2.5 to 10	10																																											
10	0 371 74	Green/yellow	16	1.5 to 25	4 to 16	12																																											
10	0 371 75	Green/yellow	35	2.5 to 50	4 to 35	15																																											
		<b>1 connection - bare block</b>																																															
10	0 371 76	-	35	2.5 to 50	4 to 35	15																																											
		<b>1 connection - 2 entries/2 outlets</b>																																															
50	0 371 79	Green/yellow	4	0.25 to 6	0.25 to 4	6																																											
		<b>PNE - Phase/Neutral/Earth</b>																																															
		<b>3 connections on 3 levels</b>																																															
		Metal base Green/yellow marking for the lower level Screwless fixing on rail																																															
50	0 371 52 <sup>2</sup>	Grey	2.5	0.25 to 4	0.25 to 2.5	5																																											

Viking 3 power terminal blocks (p. 310)

CAB 3 marking system (p. 314)

1: Built-in end cap  
2: Rigid wire capacity: 2.5 mm<sup>2</sup> max. with equipotential bridging comb