



New DPX³

Precise protection and measurement


MOULDED CASE CIRCUIT BREAKERS FROM 16 TO 250 A

 **legrand**[®]

The new DPX³ range of MCCBs is one of a series of Legrand solutions for providing improved protection and control of all your low voltage installations.

DPX³ is the ideal solution if you are looking for reliable, safe and precise protection for people and property, good continuity of service, easy installation, freedom of layout and easy maintenance and adjustment. The technological innovations incorporated in the product provide you with improved remote control and easy access to the electrical parameters or the energy consumption in your installation.

In this document you will learn about the numerous advantages of the DPX³/DPX range, which is suitable for all your requirements in terms of selecting, designing or creating electrical panels, investment, or operating the installation.

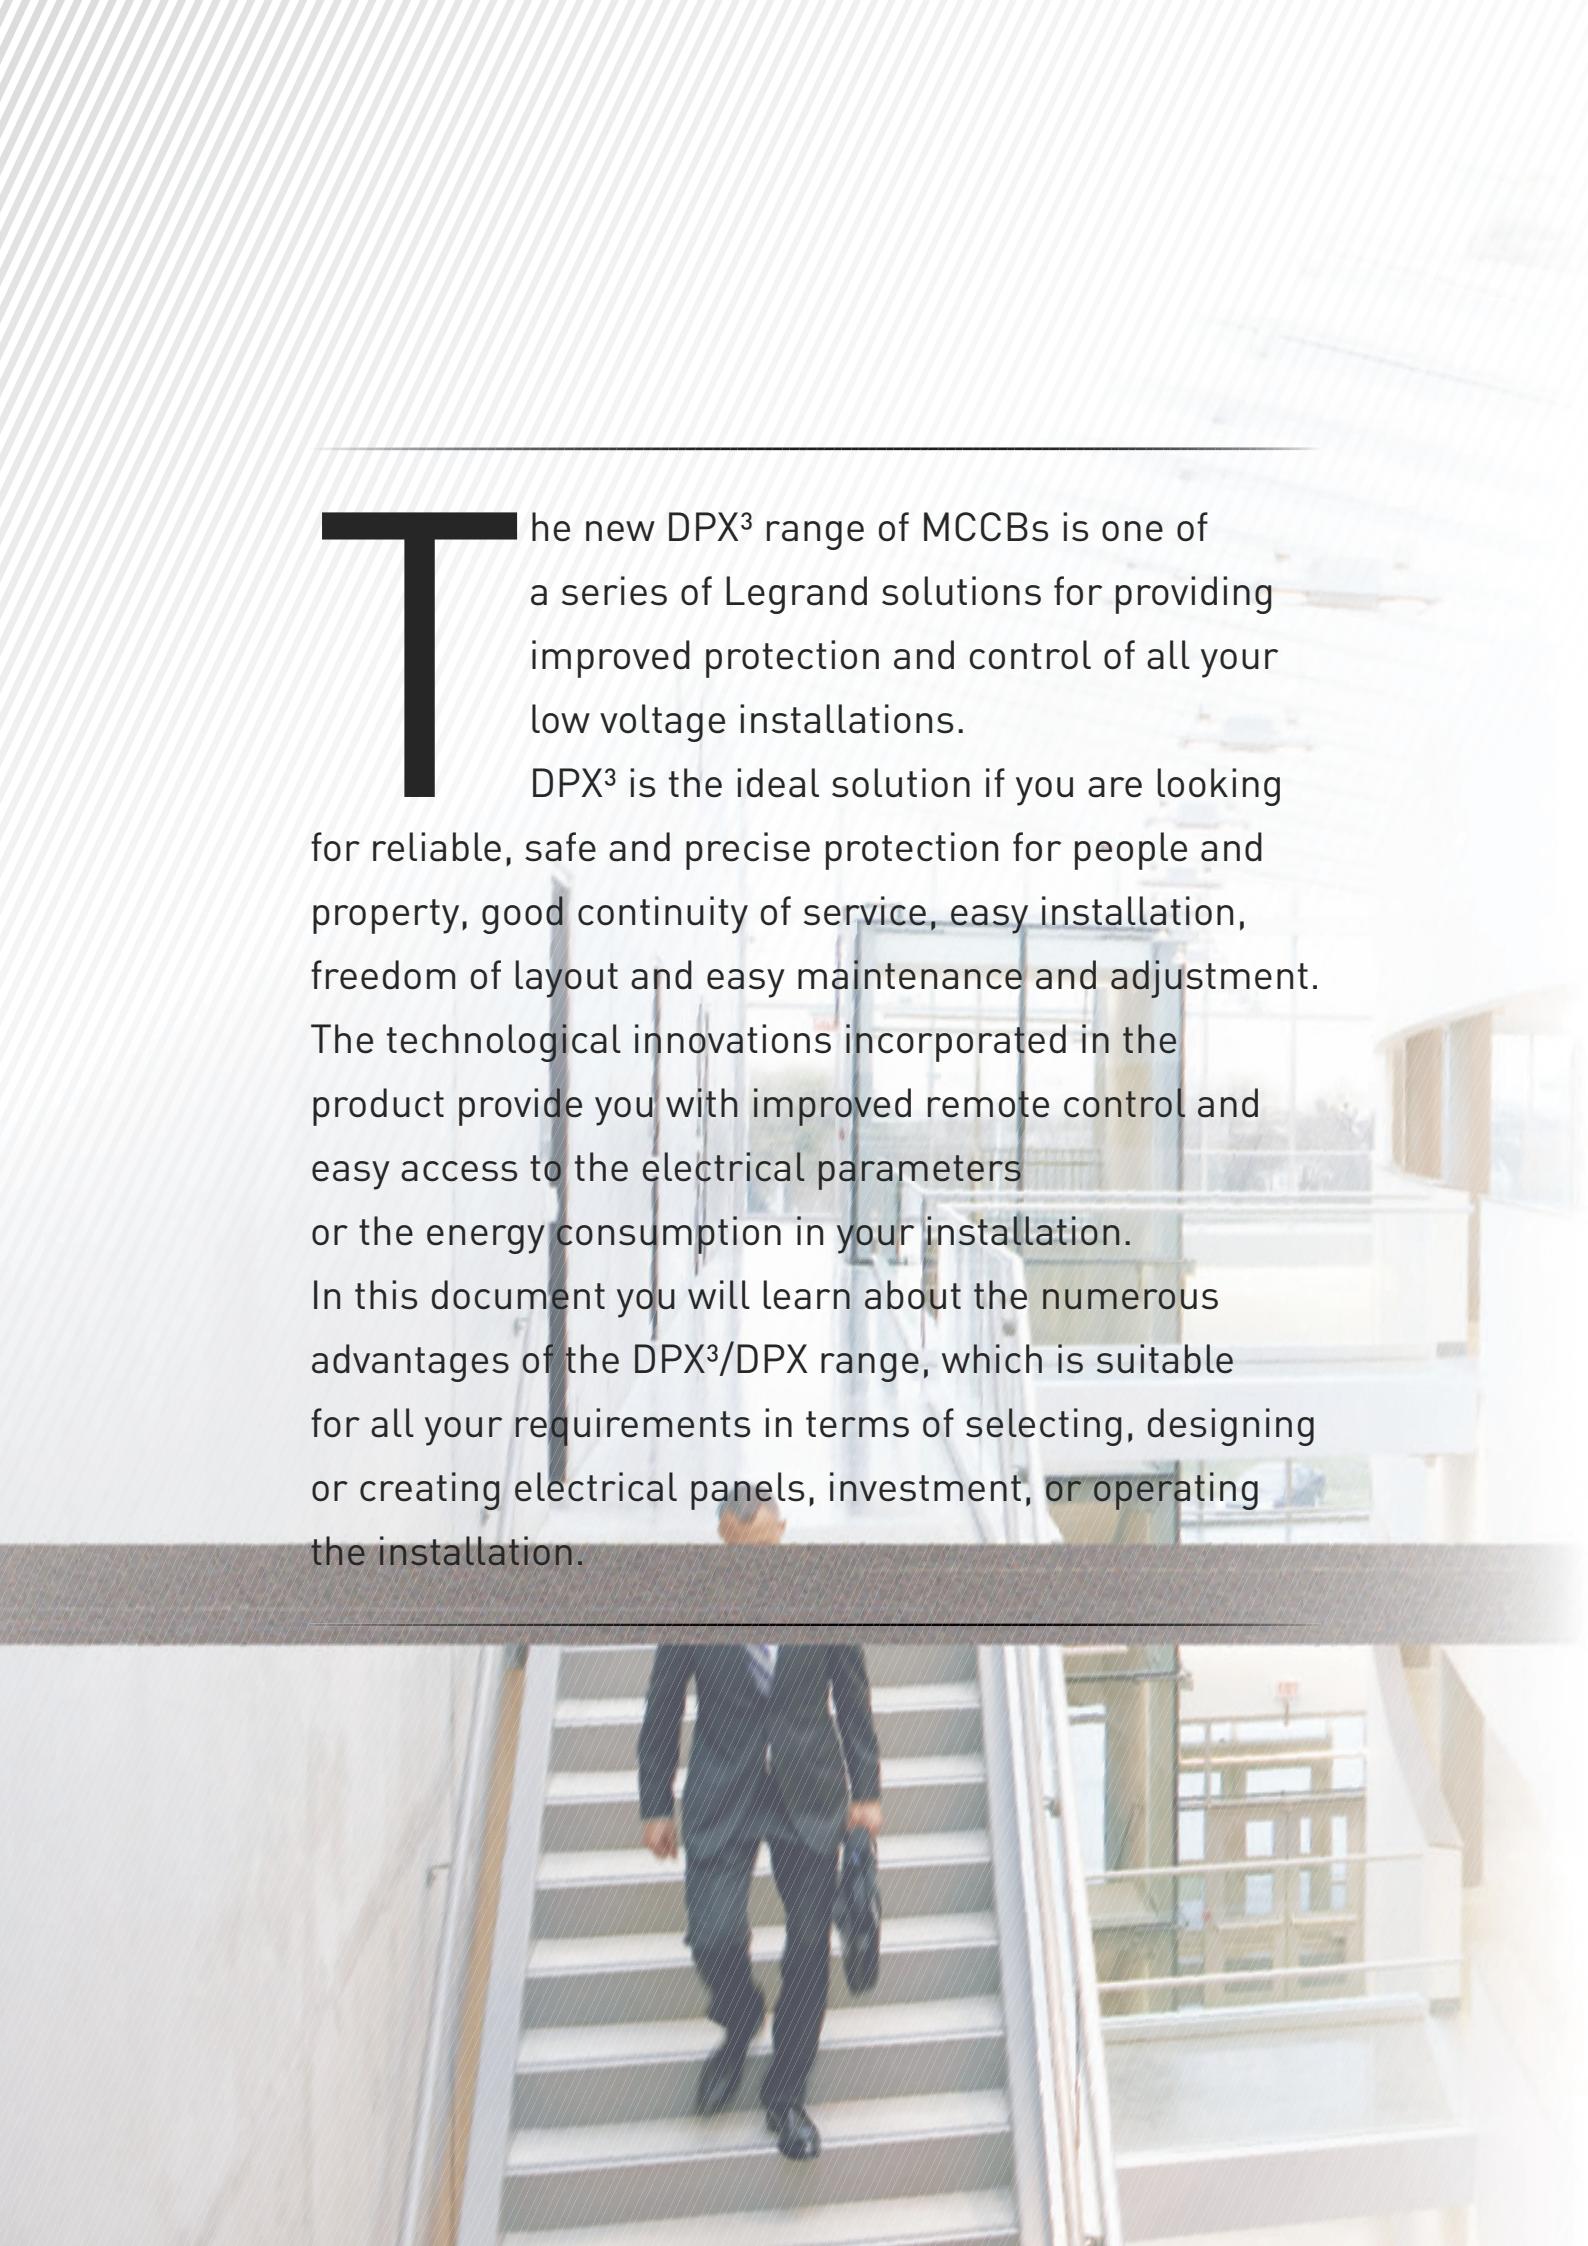

Pages 02-09

**WIDE CHOICE,
HIGH
PERFORMANCE
AND SAFETY**

- 02-03** | A complete range for all requirements from 16 to 1600 A
- 04-05** | DPX³, an optimised range
- 06-07** | Reliable and precise protection
- 08-09** | Continuity of service

Pages 10-13

**NEW FUNCTIONS
SIMPLIFYING
THE USE**

- 10-11** | Easy operation and maintenance
- 12-13** | A complete range of accessories

Pages 14-23

**SIMPLE
AND QUICK
INSTALLATION**

- 14-15** | Installation of auxiliaries and connection
- 16-17** | Reliable and safe distribution system
- 18-19** | Perfect integration in XL³ enclosures
- 20-21** | The XL³ range: the answer to all your requirements
- 22-23** | Legrand services and commitments

Pages 24-71

CATALOGUE PAGES

- 24-31** | DPX³ 160 and DPX³ 250
- 32-33** | DPX³ 160 and DPX³ 250 accessories
- 34-45** | DPX 250, DPX 630 and DPX 1600
- 46-51** | XL³ accessories selection chart
- 52-71** | DPX³ and DPX technical characteristics

A COMPLETE RANGE FOR ALL YOUR REQUIREMENTS FROM 16 TO 1 600 A

02 | 03

DPX³/DPX: 5 sizes of moulded case circuit breakers

Breaking capacity ranging from 16 to 70 kA.



Easy identification of the breaking capacity: colour marking



MOUNTING	ON RAIL ↴ OR ON PLATE				ON RAIL ↴ OR ON PLATE				ON PLATE		ON PLATE		ON PLATE		ON PLATE		
Rated current In	Thermal magnetic release	From 16 to 160 A				From 100 to 250 A				From 40 to 250 A		From 320 to 630 A		From 800 to 1 250 A		-	
	Electronic release	-				From 40 to 250 A				From 40 to 250 A		From 250 to 630 A		-		From 800 to 1 600 A	
Breaking capacity Icu ⁽¹⁾	380/415 V~	16 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	70 kA	36 kA	70 kA	36 kA	70 kA	36 kA	70 kA	50 kA	70 kA
	220/240 V~	25 kA	35 kA	50 kA	65 kA	40 kA	60 kA	100 kA	100 kA	60 kA	100 kA	60 kA	100 kA	80 kA	100 kA	80 kA	100 kA
Standard breaking capacity Ics (% Icu)	100 %	100 %	100 %	100 %	100 %	100 %	100 %	100 %	100 %	100 %	75 %	100 %	75 %	100 %	75 %	100 %	75 %
Electronic earth leakage module	Without or integrated				Without or integrated				Without or downstream		Without or downstream		Without or residual current relay and coils				

(1) EN 60947-2 and IEC 60947-2

DPX³, AN OPTIMISED RANGE

04 | 05

The same depth for all circuit breakers from 16 to 250 A


With 2 new ratings (80 and 200 A), a wide range of versions, characteristics and innovative functions, Legrand has an even more comprehensive range with just two sizes of circuit breakers.

Thermal-magnetic DPX³ 160Thermal-magnetic DPX³ 160 with residual current protectionThermal-magnetic DPX³ 250Thermal-magnetic DPX³ 250 with residual current protectionElectronic DPX³ 250Electronic DPX³ 250 with residual current protectionElectronic DPX³ 250 with integrated measuring unitsElectronic DPX³ 250 with residual current protection and integrated measuring units

A complete range satisfying your requirements

	DPX ³ 160								DPX ³ 250				
Nominal current In (A)	16	25	40	63	80	100	125	160	40	100	160	200	250
Number of poles	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Versions	Fixed	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Plug-in	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Release	Thermal-magnetic	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Electronic								✓	✓	✓		✓
Options	Residual current protection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Measurement								✓	✓	✓		✓
Breaking capacity Icu (kA)	Earth protection								✓	✓	✓		✓
	16	✓	✓	✓	✓	✓	✓	✓					
	25	✓	✓	✓	✓	✓	✓	✓					
	36	✓	✓	✓	✓	✓	✓	✓					
	50	✓	✓	✓	✓	✓	✓	✓					
	70												


Optimised dimensions

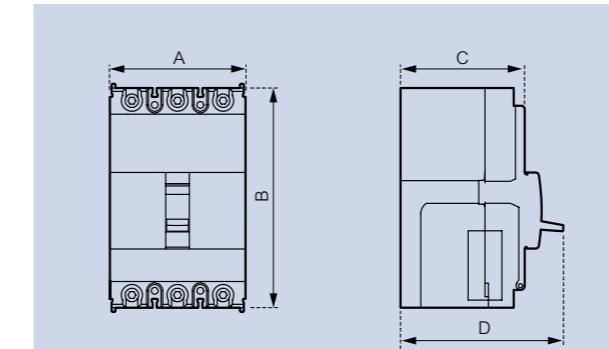


DIMENSIONS (mm)	DPX ³ 160	DPX ³ 250
A	3P: 81 4P: 108	105 140
B	Without RCD: 130 With RCD: 160	165 195
C		74
D		100

THE SAME DEPTH FOR ALL RATINGS

Optimised integration: devices with different ratings can be used together on the same row.

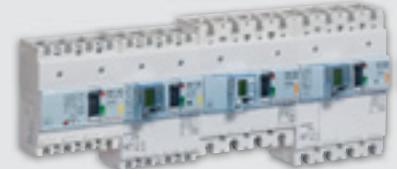

Interlocking of 2 MCCBs of different ratings.

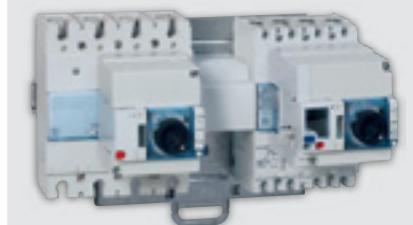

RELIABLE AND PRECISE PROTECTION

06 | 07

To comply with all requirements for the protection of people and property, the new DPX³ MCCBs and DPX³ RCBs are available in thermal-magnetic versions from 16 to 250 A and electronic versions from 40 to 250 A.

Thermal-magnetic MCCBs DPX³ 160 and DPX³ 250

The thermal trip threshold I_r on all these devices can be adjusted to provide the best protection against overloads.

On the DPX³ 250 the magnetic trip threshold I_i can also be adjusted, for precise protection against short-circuits.

This threshold is fixed on the DPX³ 160.



Thermal-magnetic MCCBs are adjusted on the front panel using a screwdriver

THERMAL-MAGNETIC RELEASES	DPX ³ 160	DPX ³ 250
Thermal protection against overloads I_r [A]	Adjustable: 0.8 to 1 x I_n	
Magnetic protection against short circuits I_i [A]	Fixed 16 A: 400 A 25 A: 400 A 40 to 160 A: 10 x I_n	Adjustable: 0.8 to 1 x I_n

Electronic MCCBs DPX³ 250


Electronic releases provide very precise adjustment of the trip thresholds I_r and I_{sd} and the response times T_r and T_{sd} .

On MCCBs with protection against earth faults I_{sg} and T_{sg} can be adjusted.



Adjustments are made using the selector switch and are displayed on the LCD screen

ELECTRONIC RELEASES	DPX ³ 250		
Long delay protection against overloads	Threshold I_r [A]	Adjustable	0.4 to 1 x I_n
	Response time T_r [s]		3 to 16 s
Short delay protection against short circuits	Threshold I_{sd} [A]	Adjustable	1.5 to 10 x I_r
	Response time T_{sd} [s]		0 to 0.5 s
Protection against earth faults	Threshold I_{sg} [A]	Adjustable	0.2 to 7 x I_n
	Response time T_{sg} [s]		0.1 to 1 s



RCBs DPX³ 160 and DPX³ 250

Precise protection of people is provided on all RCDs (thermal-magnetic and electronic) by an integrated electronic unit. Adjustments are made via an LCD screen.

RESIDUAL CURRENT PROTECTION	DPX ³ 160/250
Trip threshold $I_{\Delta n}$ [A]	0.03 - 0.3 - 1 - 3
Response time Δt [s]	0 - 0.3 - 1 - 3

ADVANTAGES OF THE ELECTRONIC RELEASE:

- RS485 communication function
- Self-diagnostic function
- More precise adjustments
- Event log
- Optional measurement unit.




CONTINUITY OF SERVICE

08 | 09


Selectivity of DMX³, DPX³ and DPX MCCBs

Selectivity consists of coordinating the protection in such a way that a fault on one circuit only trips the protection placed directly upstream of the fault, thus avoiding the rest of the installation being put out of service.

Legrand circuit breakers are the ideal answer for total selectivity, providing 4 types of coordination: current sensing, time, dynamic and logical.

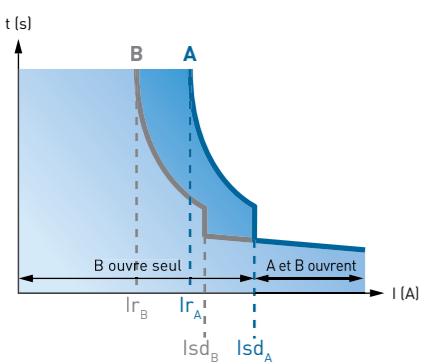


Current sensing selectivity
Choice of the correct rating to ensure selectivity

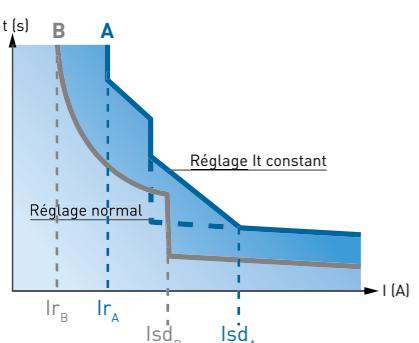


Dynamic selectivity
High and low electronic adjustment of the upstream and downstream circuit breakers

→ For more information, please refer to Power Guide 05,
"Breaking and protection devices"

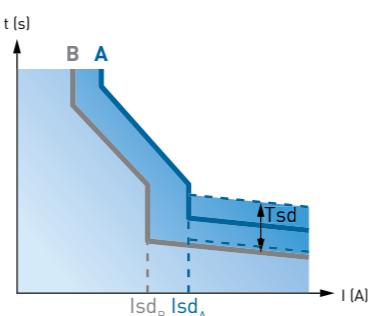

Time selectivity
Choice of the correct setting on a circuit breaker to space out the trips over time

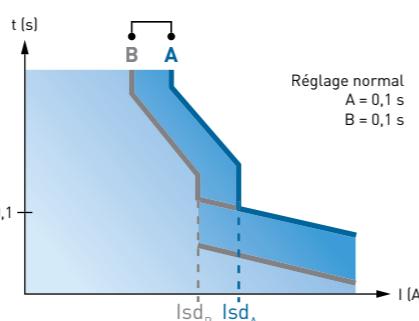



Logical selectivity
Communication between the circuit breakers to adjust the tripping to the actual operating requirements

DPX³ 160 and 250 supply invertors

Supply inversion switches the power supply of the installation to a backup supply when there is a fault on the main supply.

The DPX³ interlocking device greatly simplifies installing the supply inverter:

- Front mounting
- Compact size
- No adjustments required
- Ability to use a DPX³ 160 and a DPX³ 250 together
- Fixed version rail mounted, enabling installation in small cabinets
- Just 2 catalogue numbers covering all DPX³, whatever the size: one for fixed versions, one for plug-in versions.

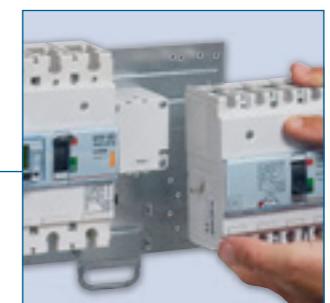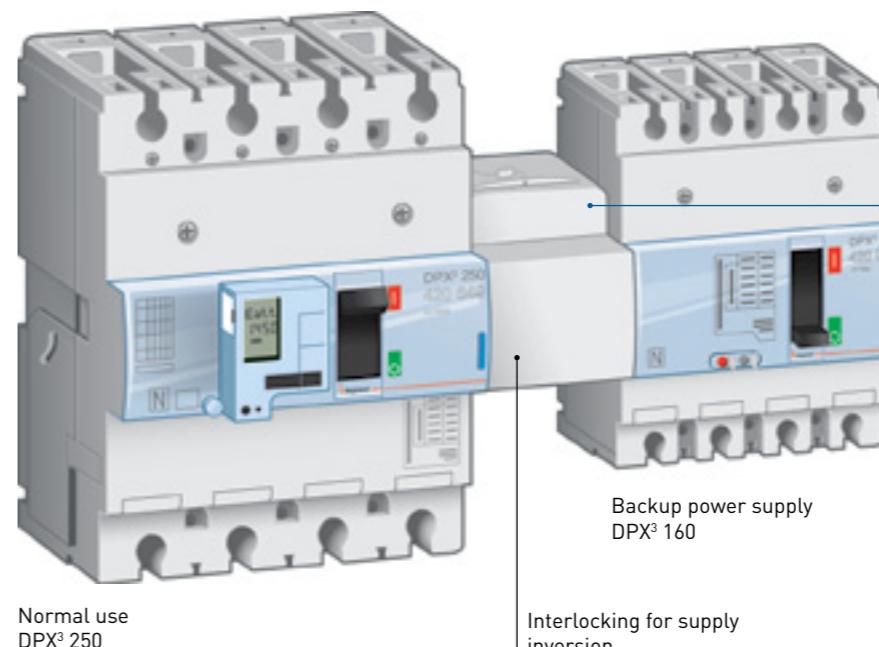

Easy to install:
mounting on front panel
with no adjustment

MOTORISED SUPPLY INVERSION FOR CONTINUOUS OPERATION
Combined with an automated control unit, supply inversion can be controlled locally or even remotely by supervision.





EASY OPERATION AND MAINTENANCE

Integrated measuring units on electronic DPX³ 250

The new DPX³ 250 electronic MCCBs with integrated measurement functions provide access to the parameters of the installation in a compact unit.

The measured values can be viewed:

- Directly on the electrical panel, on the LCD screen on the front panel of the device
- Remotely using a PC or a smartphone equipped with supervision software, via the RS485 communication interface and the Modbus protocol.

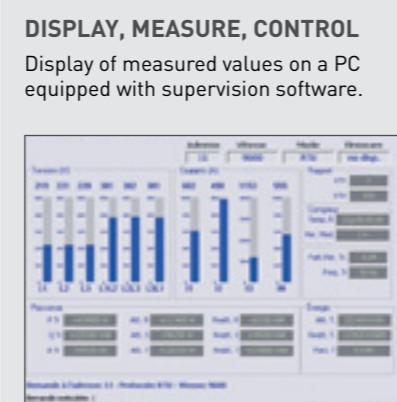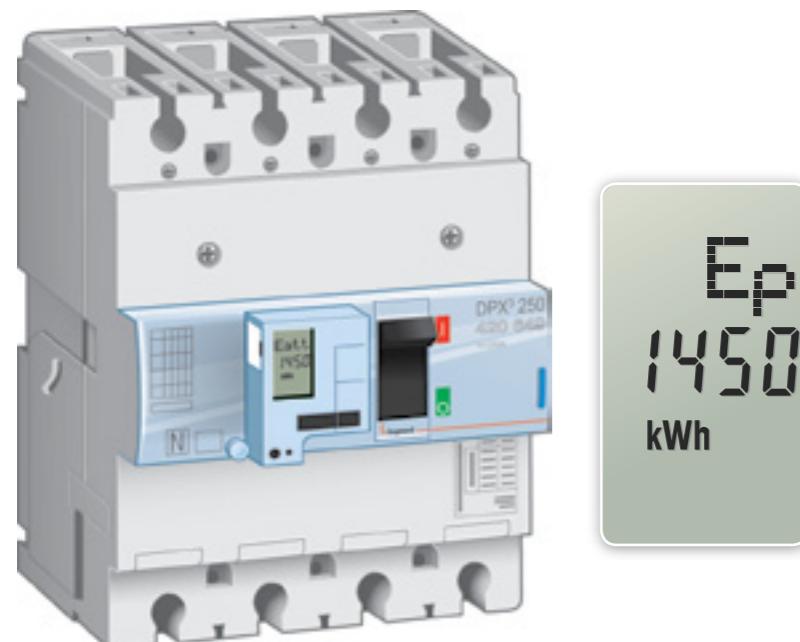


Plug-in DPX³ 160 and DPX³ 250

Replacing a plug-in device only takes a few minutes and can be done without switching off the power supply to the other circuits.

All the devices in the DPX³ range can be converted to plug-in versions. The bases are supplied with all the necessary components to convert the devices. They are mounted on plates and can be connected via front or rear terminals.

Specific accessories are available as options to ensure the safety of testing and maintenance operations.

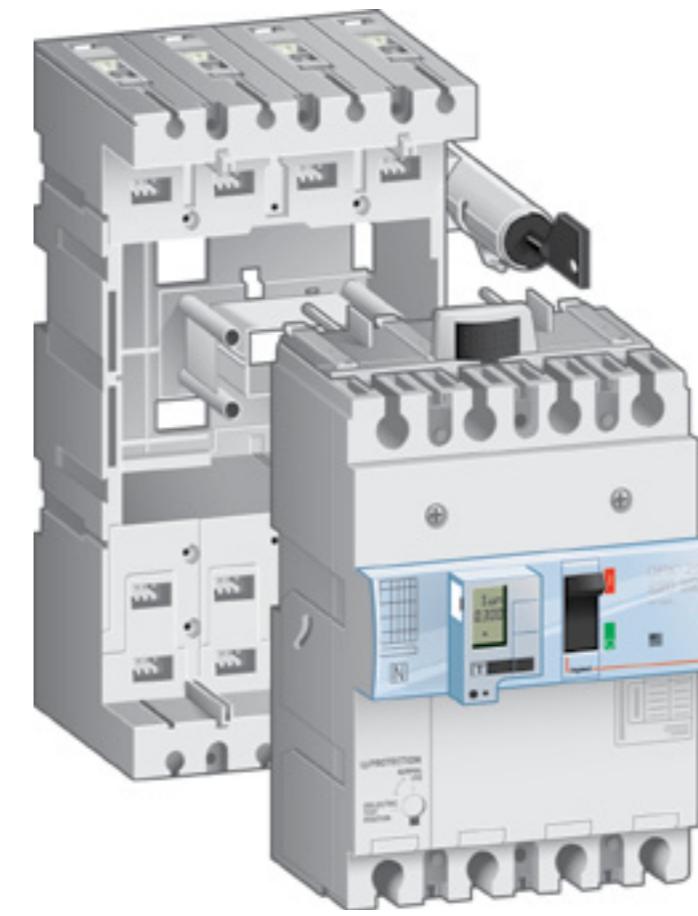

With the optional connector
the power can be disconnected while the auxiliaries are kept operational for tests



The top and bottom handles
enable the device to be extracted easily




Locking via key or padlock
prevents the device being switched on, on its base, during maintenance operations

A COMPLETE RANGE OF ACCESSORIES


Motorised control for DPX³ 160 and 250

Motorised controls for the DPX³ 160 and 250 enable devices to be tripped and reset remotely to provide a simple answer to operating requirements. They are available in just **2 catalogue numbers** for all the DPX³, one with a **side** control and one with a **front** control. They take a wide range of DC and AC supply voltages.

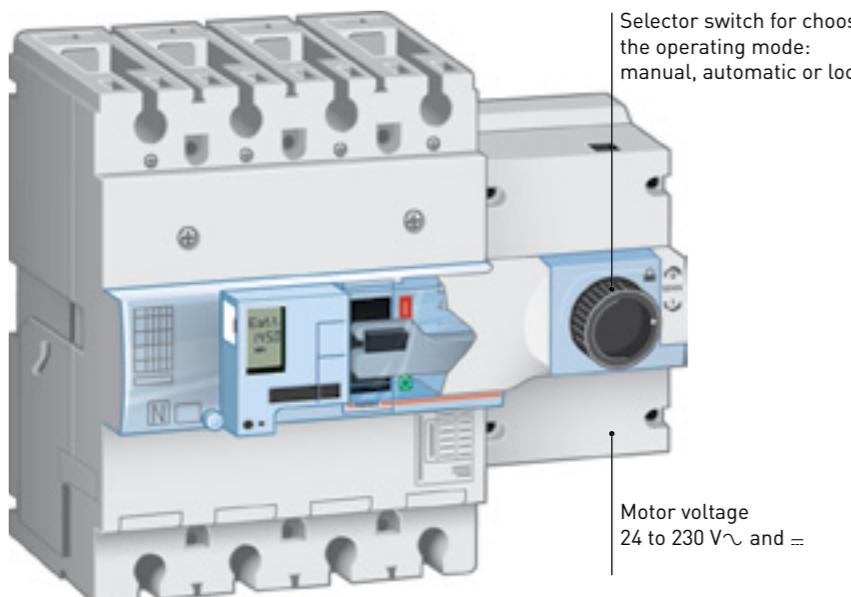

Rotary controls for DPX³ 160 and 250

Direct or remote rotary controls provide the **utmost convenience**. They can be **locked using padlocks or keys** to ensure the safety of maintenance operations.

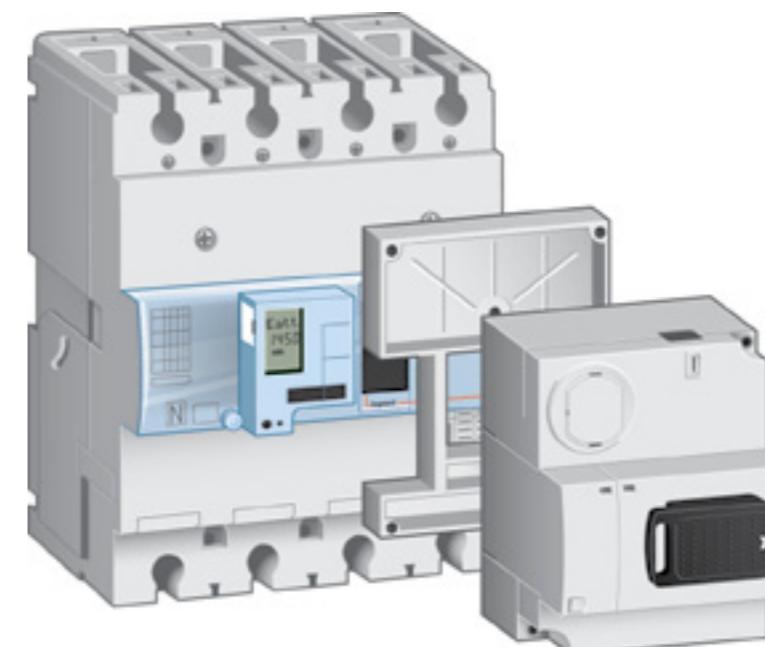

The operating key
is always available for periodic tests or for manual control

The front motorised control
leaves access to the connections and adjustment



The side motorised control
is mounted on the rail beside the DPX³



Remote control from a PC equipped with supervision software for load shedding and restoration.



Rotary controls
can take a lock with key



The remote rotary control
enables the control handle to be installed on the door

REMINDER:
The DPX 250, 600 and 1600 keep their own specific accessories: motorised, rotary and remote controls.



INSTALLATION OF AUXILIARIES AND CONNECTION


Control and signalling auxiliaries for DPX³ 160 and 250

The trip coils enable the opening of the circuit breaker to be controlled via a control circuit (emergency break, electronic control box, remote control).

Auxiliary and fault signal contacts are used to control an auxiliary circuit or to feed back the status of the circuit breaker remotely.




The electrical auxiliaries are installed in dedicated locations under the front panel

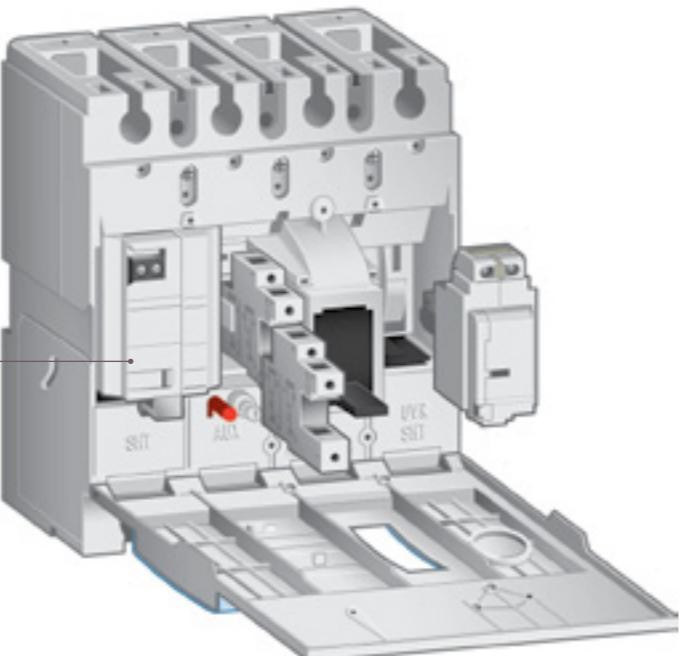

DPX³ have three options for the outgoing connection wires: via the front panel,



...via the side,
...or via the back

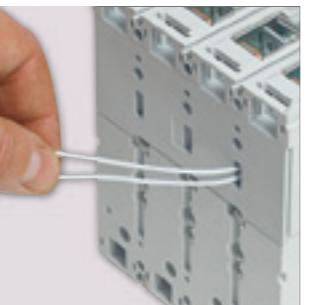

AUXILIARIES COMMON TO THE DPX³ 160 AND 250:



- Auxiliary or fault signal contact
- Current shunt trips
- Undervoltage releases

Connecting DPX³ 160 and 250

DPX³ 160 have cage terminals as standard for direct connection via cable or bars. DPX³ 250 are supplied with plain connection plates for connection via bars or lugs. They can have cage terminals as an option.

A complete range of connection accessories is also available for all installation configurations.



Connecting a DPX³ 160
via cables on integrated cage terminals



Connecting a DPX³
via flexible bars screwed onto plates



The spreaders enable
connection via large
cross-section cables



The flat rear terminals
are adjustable



The terminal shields provide
IP 2X protection
for the connections

LARGE CAPACITY CAGE TERMINALS

Large capacity cage terminals enable connection via cable up to 150 mm² (see catalogue pages for more details)



RELIABLE AND SAFE DISTRIBUTION SYSTEM


16 | 17

The HX³/VX³ optimised distribution system

Optimised distribution is a complete, coherent system for distributing electricity in the panel:

- Optimised busbars (C-section copper and zinc plated aluminium)
- Prefabricated links for connecting devices to the busbars
- Horizontal distribution blocks with automatic connection of devices (can be connected while energised)

All these components, which have been tested with Legrand devices, can be used to create safe, easy to maintain panels that comply with standard IEC 61439, cut down installation time and optimise the size of enclosures.

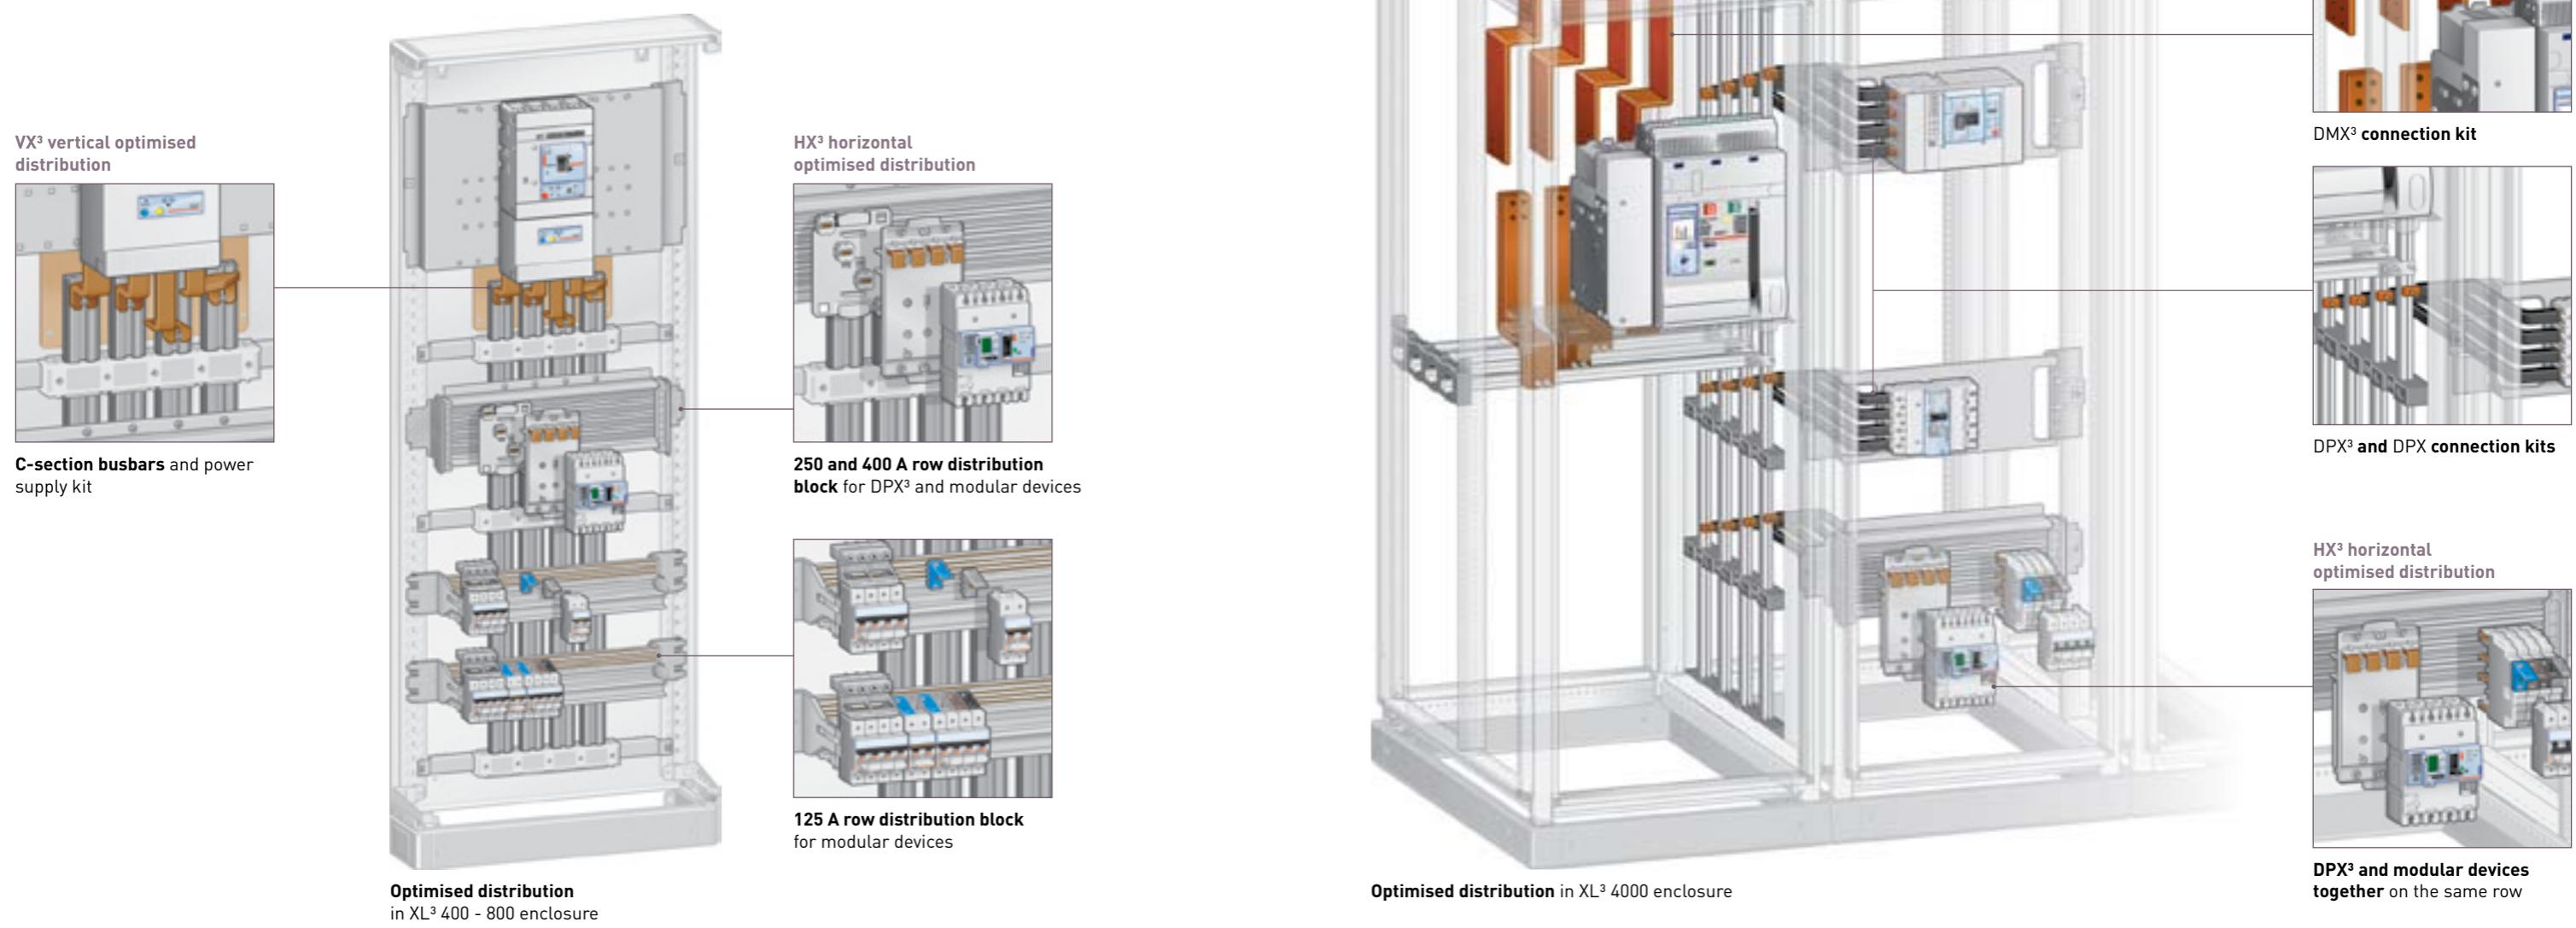

PERFECT INTEGRATION IN XL³ ENCLOSURES

18 | 19


Mounting on a rail and on a plate-rail

All fixed version DPX³ with front terminals can be mounted on a  rail or on a plate-rail using an adaptor.


Mounting on a  rail enables DPX³ 160 to be installed in XL³ 125 or XL³ 160 cabinets.

Mounting on a plate-rail provides extra strength to withstand mechanical stresses while maintaining the possibility of mounting DPX³ 160 and 250 and modular devices together on the same row.

Examples of mounting in an XL³ 160 cabinet

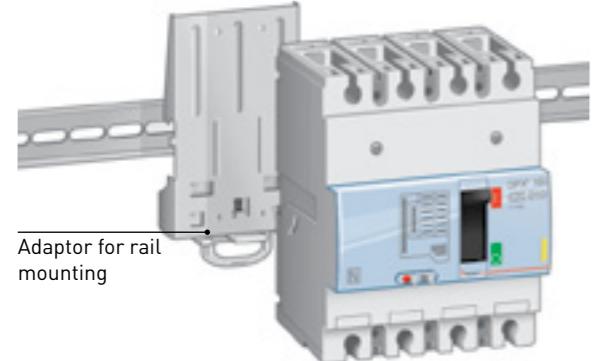


Mounting a DPX³ 160 on a rail

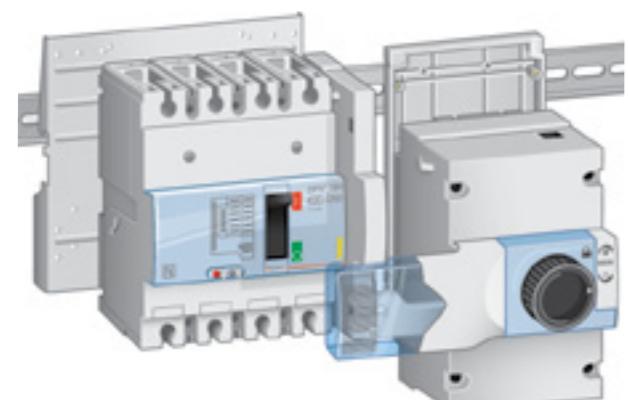


Mounting a DPX³ 160 with side motorised control on a rail

Examples of mounting in XL³ 400/800/4000 enclosures

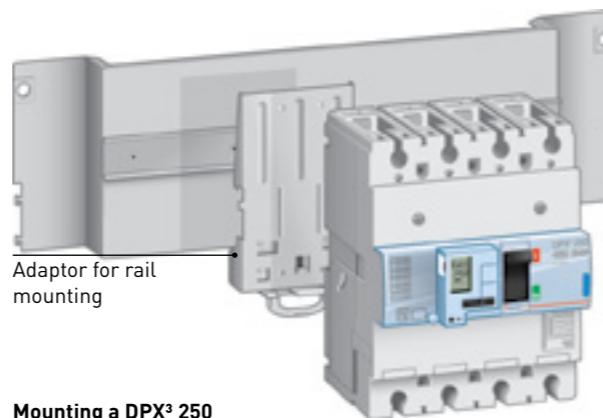

Mounting a DPX³ 250 on a plate-rail

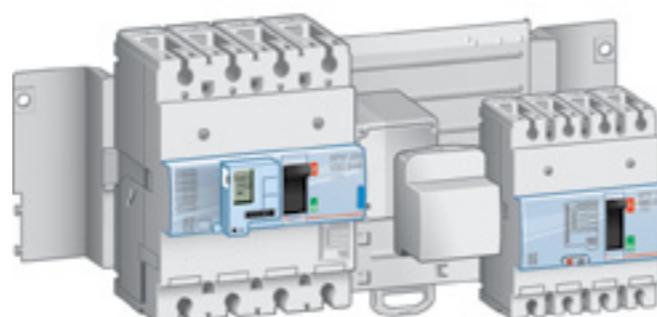

Mounting two DPX³ on a rail as supply invertors


Mounting on a plate

There are dedicated plates for mounting DPX³ 160 and 250 in XL³ enclosures:

- Horizontally
- Plug-in version
- Connected via rear terminals
- With front rotary or motorised control



Mounting a DPX³ horizontally on a plate

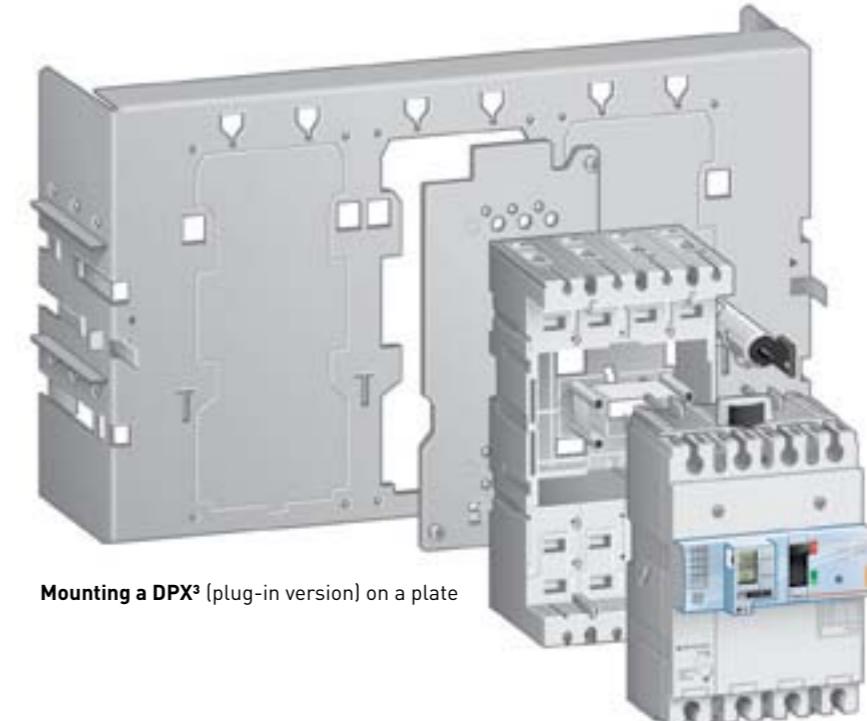


Mounting a DPX³ (plug-in version) on a plate

THE XL³ RANGE: THE ANSWER TO ALL YOUR REQUIREMENTS

Distribution panels from 125 to 4000 A

From the XL³ 125 cabinet to the XL³ 4000 enclosure, the Legrand range meets all your quality standards: the strength and stylish design of XL³ panels ensure perfect, long-lasting integration. The XL³ range features numerous practical innovations for quick, safe assembly, real freedom of configuration and considerable time-saving during maintenance and extension operations.

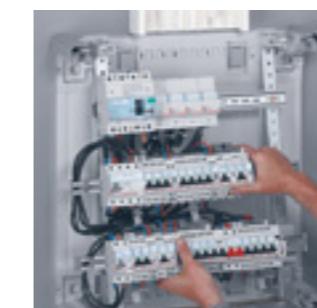

The XL³ 125 cabinets

Optimised wiring for maximum ease of installation and time-saving. The faceplate can be removed one row at a time, or the whole cover can be taken off, depending on the extent of the work to be carried out inside the cabinet: wiring or maintenance.



LEGRAND SERVICES AND COMMITMENTS

22 | 23

XL PRO³ and XL PRO³ Calcul software

The XL PRO³ software is an upgraded version of your distribution panel design software: **revised interface, new DPX³ and DX³ ranges incorporated, HX³ and VX³ distribution accessible with a single click, etc.**

And it still includes all your functions:

- Guided selection of products and accessories
- Display of the enclosure and the component layout
- Automatic creation of the folder for costing and ordering

XL PRO³ Calcul interfaces with XL PRO³.


It enables you to create single-line diagrams, carry out design calculations, work out the power analysis, and calculate the necessary protective devices with their settings.

To order the software, please contact your Legrand sales office.



XL PRO³ EVEN MORE POWERFUL AND CLOSER TO YOUR REQUIREMENTS


The new offer included in the databases

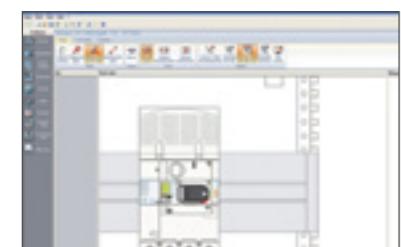

HX³ and VX³ distribution managed directly in the layout and circuit diagrams and the parts list



A re-designed interface for more intuitive use

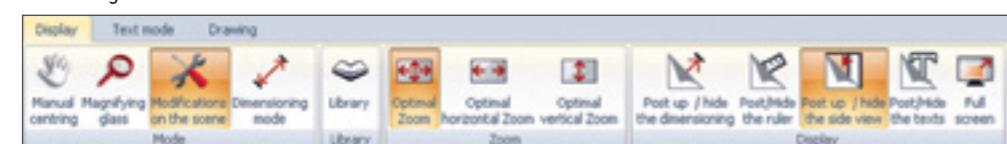

Environmental commitment

The Legrand Group prioritises materials and processes that respect people and the environment both on its industrial sites and in the design of its products. Through this approach, the Group reduces the impact of its activities while strengthening its economic performance and the appeal of its offers.

THE PEP: A RECOGNISED, RELIABLE TOOL

The PEP is tool that is used by the whole profession. It gives a clear, accurate message. The type of sheet shown below is the result of an overall process in the electrical industries. It is based on standard ISO/TR 14025:

- Environmental labels and declarations
- Type III environmental declarations
- It uses a recognised methodology and tools:
- Life cycle assessment (based on standard ISO 14040)
- EIME software (Environmental Information & Management Explorer).



The PEP, an eco-declaration which is available as a printed document



DPX³/DPX™
electrical characteristics

DEVICES	DPX ³ 160 thermal magnetic (p. 26-27)				DPX ³ 250 thermal magnetic (p. 28)				DPX ³ 250 electronic release (p. 29)				DPX 250 thermal magnetic (p. 34-36)				DPX 250 electronic release (p. 34-36)		DPX 630 thermal magnetic (p. 37-39)		DPX 630 electronic release (p. 37-39)		DPX 1250 thermal magnetic (p. 40)		DPX 1600 electronic release (p. 40)												
Mounting	On rail or on plate				On rail or on plate				On rail or on plate				On plate				On plate		On plate		On plate		On plate		On plate												
Breaking capacity (kA) (EN 60947-2 and IEC 60947-2)	16 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	70 kA	25 kA	36 kA	50 kA	70 kA	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	50 kA	70 kA ⁽¹⁾⁽³⁾													
380/415 V~	16	25	36	50	25	36	50	70	25	36	50	70	36	70	36	70	36	70	36	70	50	70	50	70													
220/240 V~	25	35	50	65	40	60	100	100	40	60	100	100	60	100	60	100	60	100	60	100	80	100	80	100													
Breaking capacity (% Icu)	100	100	100	100	100	100	100	100	100	100	100	100	100	75	100	75	100	75	100	75	100	75	100	75													
Characteristic of use																																					
Nominal frequency	50/60 Hz												50/60 Hz																								
Maximum rated operating voltage Ue	690 V (500 V with integrated e.l.c.b.s)				690 V (500 V with integrated e.l.c.b.s)				690 V (500 V with integrated e.l.c.b.s)				690 V~ - 250 V=				690 V~		690 V~ - 250 V=		690 V~		690 V~		690 V~		690 V~										
Category of use	A				A				A				A				A		A		A		A		B												
Thermal magnetic adjustment																																					
	Thermal	0,8 to 1 ln				0,8 to 1 ln				-				0,64 to 1 ln				-		0,8 to 1 ln		-		0,8 to 1 ln		-											
	Magnetic	10 ln (400 A for 16 A and 25 A sizes)				5 to 10 ln				-				3,5 to 10 ln				-		5 to 10 ln		-		5 to 10 ln		-											
Electronic protection adjustment																																					
	-				-				Ir : 0,4 to 1 ln Isd : 1,5 to 10 Ir				-				Ir: 0,4 to 1 ln Tr: 5 to 30 s Isd: 1,5 to 10 Ir Tsd: 0 to 0,3 s I't = K Tsd: 0,01 to 0,3 s				-		Ir: 0,4 to 1 ln Tr: 5 to 30 s Isd: 1,5 to 10 Ir Tsd: 0 to 0,3 s I't = K Tsd: 0,01 to 0,3 s		-		Ir: 0,4 to 1 ln Tr: 5 to 30 s Isd: 1,5 to 10 Ir Tsd: 0 to 0,3 s I't = K Tsd: 0,01 to 0,3 s		-		Ir: 0,4 to 1 ln Tr: 5 to 30 s Isd: 1,5 to 10 Ir Tsd: 0 to 0,3 s I't = K Tsd: 0,01 to 0,3 s						
Maximum cable cross-section																																					
Rigid cable	120 mm ²				185 mm ²				185 mm ²				185 mm ²				185 mm ²		185 mm ²		300 mm ² or 2 x 240 mm ²		300 mm ² or 2 x 240 mm ²		2 or 4 x 240 mm ²		2 or 4 x 240 mm ²										
Flexible cable	95 mm ²				150 mm ²				150 mm ²				150 mm ²				150 mm ²		150 mm ²		240 mm ² or 2 x 185 mm ²		240 mm ² or 2 x 185 mm ²		2 or 4 x 185 mm ²		2 or 4 x 185 mm ²										
Copper bar and lug width	18 mm				25 mm ⁽¹⁾				25 mm ⁽¹⁾				25 mm				25 mm		25 mm		32 mm		32 mm		50 mm		50 mm										
Tightening torque	8 Nm				10 Nm				10 Nm				15 Nm				15 Nm		15 Nm		15 Nm		15 Nm		20 Nm		20 Nm										
Nominal current (In) at 40 °C (A)																																					
In (A)	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250	40	100	160	250	250	320	400	500	630	250	400	630	630	800	1000	1250	630	800	1250	1600	
Phase	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250	40	100	160	250	250	320	400	500	630	250	400	630	630	800	1000	1250	630	800	1250	1600	
N	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250	40	63	100	160	250	0 - 50 - 100 % of phase value	250	320	400	500	630	0 - 50 - 100 % of phase value	630	800	1000	1250	630	800	1000	1250	0 - 50 - 100 % of phase value
N/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	160	-	-	250	250	250	320	-	-	-	-	-	-	-			
Magnetic threshold (Im) (A) ⁽²⁾ of DPX thermal magnetic	Fixed								Adjustable								Adjustable																				
In (A)	16	25	40	63	80	100	125	160	100	160	200	250	-	-	-	-	40	63	100	160	250	-	250	320	400	500	630	-	800	1000	1250	-	-	-	-		
Phase	400	400	400	630	800	1000	1250	1600	125-250	200-400	315-630	500-1000	-	-	140 - 400 - 220 - 630	350 - 1000	560 - 1600	900 - 2500	-	-	1250 - 1600 - 2000 - 2500 - 3150 - 2500	3200	4000	5000	6300	-	-	4000 - 8000	5000 - 10000	6250 - 12500	-	-	-	-			
N	400	400	400	630	800	1000	1250	1600	125-250	200-400	315-630	500-1000	-	-	140 - 400 - 220 - 630	350 - 1000	560 - 1600	900 - 2500	-	-	1250 - 1600 - 2000 - 2500 - 3150 - 2500	3200	4000	5000	6300	-	-	-	-	-	-	-					
N/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1000	1600	-	-	800 - 1000 - 1250 - 1600 - 2000 - 2500 - 4000	2000	2500	2500	4000	-	-	-	-	-	-	-		
Endurance (cycles)																																					
Electrical	8000								8000				8000				8000				8000		8000		5000		5000		3000		2000						
Mechanical	25000								20000				20000				20000				20000		20000		15000		15000		10000		10000						
Electronic earth leakage module																																					
Type	without or integrated								without or integrated				without or integrated				downstream e.l.c.b.s.				downstream e.l.c.b.s.		downstream e.l.c.b.s.		downstream e.l.c.b.s.		-		-								

(1) Copper bars only

(2) Trip current for 50/60 Hz. For direct current, multiply by 1.5

DPX³ 160 thermal magnetic

MCCBs from 16 to 160 A



420 000



420 010



420 037



420 157



Technical characteristics and tripping curves (p. 60-62)

Dimensions (p. 54)

Can be mounted on rail or on plate in XL³ cabinets and enclosures

MCCBs for switching, control isolation and protection of low voltage electrical lines

Supplied with cage terminals 70 mm² max. (flexible cable) or 95 mm² max. rigid cable with accessories


Can be fitted with accessories and DPX³ common auxiliaires (p. 32)

Conform to IE C60947-2

Pack	Cat.Nos	
	3P	4P
1	420 000	420 010
1	420 001	420 011
1	420 002	420 012
1	420 003	420 013
1	420 004	420 014
1	420 005	420 015
1	420 006	420 016
1	420 007	420 017
Breaking capacity Icu 16 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 25 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 36 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 50 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	

Pack	Cat.Nos	
	4P	
1	420 030	
1	420 031	
1	420 032	
1	420 033	
1	420 034	
1	420 035	
1	420 036	
1	420 037	
Breaking capacity Icu 16 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 25 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 36 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	
Breaking capacity Icu 50 kA (400 V~)		
	In (A)	
	16	
	25	
	40	
	63	
	80	
	100	
	125	
	160	

DPX³ 160 equipment and mounting accessories

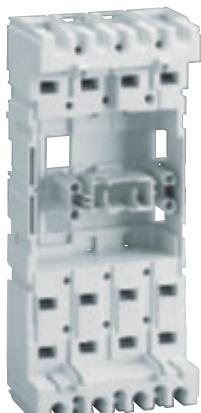

421 040



421 036

Equipment for plug-in version

Pack	Cat.Nos	
1	421 040	A plug-in version DPX ³ is a fixed version DPX ³ mounted on a plug-in base
1	421 041	Plug-in bases for DPX³ 160 Front or rear terminal mounting base For DPX ³ 160 - 3P For DPX ³ 160 - 4P with or without earth leakage module
1	421 044	Connectors for auxiliary contacts Set of connectors
1	421 045	Padlocks for plug-in base Ronis locking accessory
1	421 046	Profalux locking accessory
1	421 047	Padlock accessory

Connection accessories

		Cage terminals For Cu/Al cables, 1 x 95 mm ² for flexible cables and 1 x 120 mm ² for rigid cable and bars or lugs 18 mm Set of 3 terminals
1	421 026	Set of 4 terminals
1	421 027	
1	421 070	Insulated shields Set of 3 insulated shields
1	421 028	Extended front terminals For copper bars
1	421 029	Set of 3 terminals Set of 4 terminals
1	421 032	Spreaders For incoming bars or cable lugs
1	421 033	Set of 3 spreaders for DPX ³ 160 3P Set of 4 spreaders for DPX ³ 160 4P
1	421 036	Rear terminals Flat swivel terminals
1	421 037	Used to convert a fixed version with front terminals to a fixed version with rear terminals Set of 3 rear terminals for DPX ³ 160 3P Set of 4 rear terminals for DPX ³ 160 4P

Sealable terminal shields

1	421 054	For front terminals For DPX ³ 160 3P For DPX ³ 160 3P
1	421 055	
1	421 050	For rear terminals For DPX ³ 160 3P For DPX ³ 160 4P
1	421 051	

Fixing plates

1	421 071	For fixing DPX ³ 160 on L rail or on plate
1	421 073	For DPX ³ 160 3P/4P without earth leakage module
1	421 068	For DPX ³ 160 4P with earth leakage module


XL³ mounting accessories (p. 46-53)
Accessories (p. 32)

DPX³ 160


connection

■ Connection


Direct connection

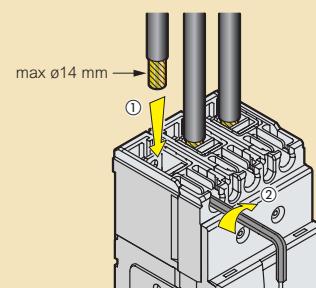


Flexible	1,5 → 70 mm ²
#16	→ #2/0 AWG
or	
Solid	1,5 → 95 mm ²
#16	→ #4/0 AWG

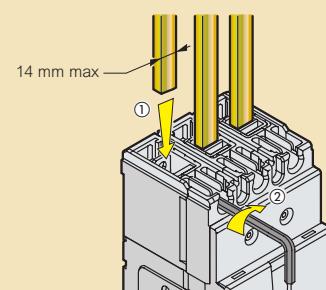


Spreaders

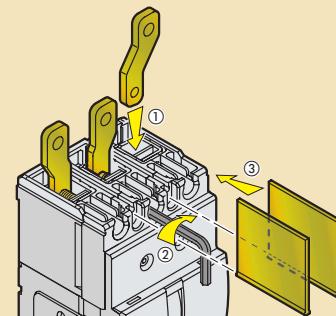

Rear terminals

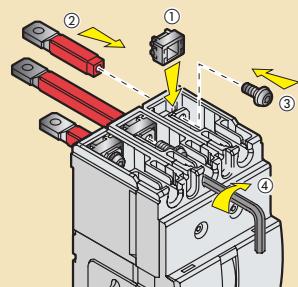

Sealable terminal shield

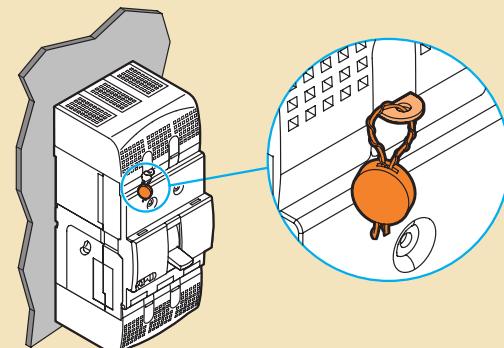

DPX³ 250 thermal magnetic

MCCBs from 100 to 250 A



420 205



420 225



Technical characteristics and tripping curves (p. 60-62)
Dimensions (p. 55)

Can be mounted on rail L or on plate in XL³ cabinets and enclosures
MCCBs for switching, control isolation and protection of low voltage electrical lines

Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)

Conform to IE C60947-2

Pack	Cat.Nos		MCCBs - fixed version	Pack	Cat.Nos		MCCBs with electronic earth leakage module - fixed version
	3P	4P	Thermal adjustable from 0,8 to 1 In Magnetic adjustable from 5 to 10 In		4P		Thermal adjustable from 0,8 to 1 In Magnetic adjustable from 5 to 10 In Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s)
1	420 205	420 215	In (A)	1	420 225	100	Breaking capacity Icu 25 kA (400 V \sim)
1	420 207	420 217	100	1	420 227	160	Breaking capacity Icu 36 kA (400 V \sim)
1	420 208	420 218	160	1	420 228	200	Breaking capacity Icu 50 kA (400 V \sim)
1	420 209	420 219	200	1	420 229	250	Breaking capacity Icu 70 kA (400 V \sim)
			250	1	420 255	100	Breaking capacity Icu 25 kA (400 V \sim)
1	420 235	420 245	100	1	420 257	160	Breaking capacity Icu 36 kA (400 V \sim)
1	420 237	420 247	160	1	420 258	200	Breaking capacity Icu 50 kA (400 V \sim)
1	420 238	420 248	200	1	420 259	250	Breaking capacity Icu 70 kA (400 V \sim)
1	420 239	420 249	250	1	420 285	100	
				1	420 287	160	
1	420 265	420 275	100	1	420 288	200	
1	420 267	420 277	160	1	420 289	250	
1	420 268	420 278	200				
1	420 269	420 279	250				
1	420 605	420 615	100				
1	420 607	420 617	160				
1	420 608	420 618	200				
1	420 609	420 619	250				

DPX³ 250 electronic release

MCCBs from 40 to 250 A



420 369



420 325



Technical characteristics and tripping curves (p. 60-62)

Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
 MCCBs for switching, control isolation and protection of low voltage electrical lines
 Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
 Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
 Conform to IE C60947-2

Pack	Cat.Nos		MCCBs - fixed version		Pack	Cat.Nos		MCCBs with electronic earth leakage module - fixed version	
			Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: Isd adjustable from 1.5 to 10 x Ir Tsd adjustable from 0 to 0.5s (p. 62)					Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: Isd adjustable from 1.5 to 10 x Ir Tsd adjustable from 0 to 0.5s (p. 62) Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s)	
			Breaking capacity Icu 25 kA (400 V~)					Breaking capacity Icu 25 kA (400 V~)	
			In (A)					In (A)	
1	420 302	420 312	40		1	420 322	40		
1	420 305	420 315	100		1	420 325	100		
1	420 307	420 317	160		1	420 327	160		
1	420 309	420 319	250		1	420 329	250		
			Breaking capacity Icu 36 kA (400 V~)					Breaking capacity Icu 36 kA (400 V~)	
1	420 332	420 342	40		1	420 352	40		
1	420 335	420 345	100		1	420 355	100		
1	420 337	420 347	160		1	420 357	160		
1	420 339	420 349	250		1	420 359	250		
			Breaking capacity Icu 50 kA (400 V~)					Breaking capacity Icu 50 kA (400 V~)	
1	420 362	420 372	40		1	420 382	40		
1	420 365	420 375	100		1	420 385	100		
1	420 367	420 377	160		1	420 387	160		
1	420 369	420 379	250		1	420 389	250		
			Breaking capacity Icu 70 kA (400 V~)					Breaking capacity Icu 70 kA (400 V~)	
1	420 635	420 645	40		1	420 655	40		
1	420 637	420 647	100		1	420 657	100		
1	420 638	420 648	160		1	420 658	160		
1	420 639	420 649	250		1	420 659	250		

DPX³ 250 electronic release

MCCBs from 40 to 250 A (continued)



420 649



Technical characteristics and tripping curves (p. 60-62)

Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
 MCCBs for switching, control isolation and protection of low voltage electrical lines
 Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
 Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
 Conform to IE C60947-2

Pack	Cat.Nos		MCCBs with energy metering central unit - fixed version		Pack	Cat.Nos		MCCBs with energy metering central unit and electronic earth leakage module - fixed version	
			Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: Isd adjustable from 1.5 to 10 x Ir Tsd adjustable from 0 to 0.5s (p. 62) Integrated energy metering central unit with LCD screen; currents, voltage, frequency, power, energy and harmonics					Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: Isd adjustable from 1.5 to 10 x Ir Tsd adjustable from 0 to 0.5s (p. 62) Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s) Integrated energy metering central unit with LCD screen; currents, voltage, frequency, power, energy and harmonics	
			Breaking capacity Icu 25 kA (400 V~)					Breaking capacity Icu 25 kA (400 V~)	
1	420 402	420 412	In (A) 40		1	420 422	420 425	In (A) 40	
1	420 405	420 415	100		1	420 427	420 429	100	
1	420 407	420 417	160		1	420 452	420 455	160	
1	420 409	420 419	250		1	420 457	420 459	250	
			Breaking capacity Icu 36 kA (400 V~)					Breaking capacity Icu 36 kA (400 V~)	
1	420 432	420 442	40		1	420 482	420 485	40	
1	420 435	420 445	100		1	420 487	420 489	100	
1	420 437	420 447	160		1	420 685	420 687	160	
1	420 439	420 449	250		1	420 688	420 689	250	
			Breaking capacity Icu 50 kA (400 V~)					Breaking capacity Icu 50 kA (400 V~)	
1	420 462	420 472	40		1	420 689		40	
1	420 465	420 475	100						
1	420 467	420 477	160						
1	420 469	420 479	250						
			Breaking capacity Icu 70 kA (400 V~)					Breaking capacity Icu 70 kA (400 V~)	
1	420 665	420 675	40		1	420 689		40	
1	420 667	420 677	100						
1	420 668	420 678	160						
1	420 669	420 679	250						

Communication interface (p. 32)

DPX³ 250 electronic release

MCCBs from 40 to 250 A (continued)



420 549



Technical characteristics and tripping curves (p. 60-62)

Dimensions (p. 55)

Can be mounted on rail L or on plate in XL³ cabinets and enclosures
MCCBs for switching, control isolation and protection of low voltage electrical lines

Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
Conform to IE C60947-2

DPX³ 250 equipment and mounting accessories



421 044

421 031

421 072

Pack	Cat.Nos	Equipment for plug-in version
1	421 042	Plug-in bases for DPX ³ 160
1	421 043	Front or rear terminal mounting base For DPX ³ 250 - 3P For DPX ³ 250 - 4P with or without earth leakage module
1	421 044	Connectors for auxiliary contacts Set of connectors
1	421 045	Padlocks for plug-in base Ronis locking accessory
1	421 046	Profalux locking accessory
1	421 047	Padlock accessory

Pack	Cat.Nos	Electronic release Sg MCCBs - fixed version
		Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: Isd adjustable from 1.5 to 10 x Ir Tsd adjustable from 0 to 0.5s (p. 62) Protection against earth fault: Ig adjustable: from 0.2 to 1 x In and OFF position Tg adjustable from 0.1 to 1s (p. 62)
		Breaking capacity Icu 25 kA (400 V\sim)
1	420 502	3P
1	420 505	4P
1	420 507	In (A)
1	420 509	40
		100
		160
		250
		Breaking capacity Icu 36 kA (400 V\sim)
1	420 522	3P
1	420 525	4P
1	420 527	In (A)
1	420 529	40
		100
		160
		250
		Breaking capacity Icu 50 kA (400 V\sim)
1	420 542	3P
1	420 545	4P
1	420 547	In (A)
1	420 549	40
		100
		160
		250
		Breaking capacity Icu 70 kA (400 V\sim)
1	420 692	3P
1	420 695	4P
1	420 697	In (A)
1	420 699	40
		100
		160
		250

Pack	Cat.Nos	Connection accessories
1	421 030	Cage terminals For Cu/Al cables, 1 x 150 mm ² for flexible cables and 1 x 180 mm ² for rigid cable and bars or lugs 25 x 8 mm
1	421 031	Set of 3 t terminals Set of 4 t terminals
1	421 070	Insulated shields Set of 3 insulated shields
1	421 034	Spreaders For incoming bars or cable lugs Set of 3 spreaders for DPX ³ 250 3P Set of 4 spreaders for DPX ³ 250 4P
1	421 035	Rear terminals Flat swivel terminals Used to convert a fixed version with front terminals to a fixed version with rear terminals Set of 3 rear terminals for DPX ³ 250 3P Set of 4 rear terminals for DPX ³ 250 4P
1	421 038	Sealable terminal shields For front terminals For DPX ³ 250 3P For DPX ³ 250 4P
1	421 039	For rear terminals For DPX ³ 250 3P For DPX ³ 250 4P
1	421 072	Fixing plates For fixing DPX ³ 250 on L rail or on plate For DPX ³ 250 3P/4P without earth leakage module For DPX ³ 250 4P with earth leakage module For DPX ³ 250 3P/4P with side mounting motor operator
1	421 074	
1	421 069	

XL³ mounting accessories (p. 46-53)
Accessories (p. 32)

DPX³ 160 and 250 common auxiliaries and accessories



421 000



421 010



421 011



421 016



421 022



421 058

Pack Cat.Nos Supply invertor type

Pack	Cat.Nos	Supply invertor type
1	421 058	Plate for mounting and interlocking of 2 DPX ³ For 2 DPX ³ 160 or 2 DPX ³ 250 or 1 DPX ³ 160 and 1 DPX ³ 250
1	421 059	For fixed version For plug-in and draw-out version

Rotary handles

Direct on DPX

1 421 000 Standard handle for thermal magnetic DPX³ without earth leakage module

1 421 001 Standard handle for electronic DPX³ and/or with earth leakage module

1 421 002 Handle for emergency use for thermal magnetic DPX³ without earth leakage module

1 421 003 Handle for emergency use for electronic DPX³ and/or with earth leakage module

Vari-depth handles

For all version of DPX³

1 421 004 Standard handle

1 421 005 Handle for emergency use

Locking accessories

1 421 006 Ronis for direct handle

1 421 007 Profalux for direct handle

1 421 008 Ronis for vari-depth handle

1 421 009 Profalux for vari-depth handle

Motor-driven handles

Motor operators 24 to 230 V~/=

1 421 060 Side motor operator

1 421 061 Front motor operator

Locking accessories

1 421 062 Ronis key barrel for front motor operator

1 421 063 Profalux key barrel for front motor operator

1 421 064 Padlock for front motor operator

1 421 065 Ronis key barrel for side motor operator

1 421 066 Profalux key barrel for side motor operator

1 421 067 Padlock for side motor operator

Pack Cat.Nos Auxiliaries

Pack	Cat.Nos	Auxiliaries
1	421 010	Auxiliary contacts 1 N/C + 1 N/O auxiliary contact for rotary handles
1	421 011	Auxiliary contact or fault signalling contact
1	421 048	Signalling contact plugged-in / drawn-out (for DPX ³ plug-in version)

Shunt releases

1 421 012 12 V~/=

1 421 013 24 V~/=

1 421 014 48 V~/=

1 421 015 110-130 V~/=

1 421 016 200-277 V~/=

1 421 017 380-480 V~/=

Undervoltage releases

1 421 018 12 V~/=

1 421 019 24 V~/=

1 421 020 48 V~/=

1 421 021 110-130 V~/=

1 421 022 200-240 V~/=

1 421 023 277 V~

1 421 024 380-415 V~







1 421 025 440-480 V~

Locking accessory

1 421 049 Padlock for locking in "open" position

Communication interface

1 421 075 Modbus

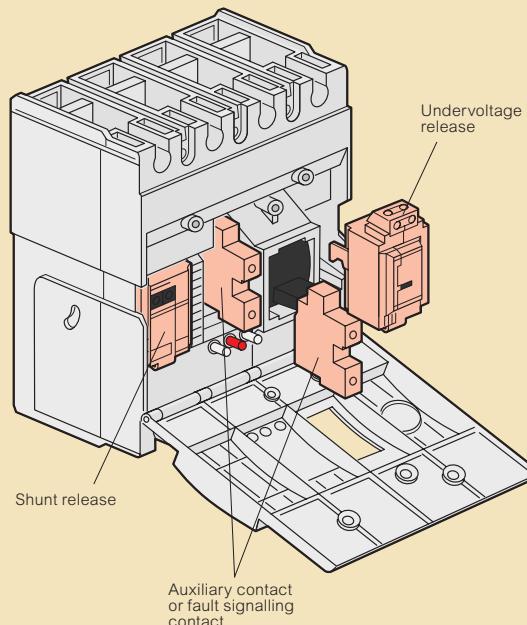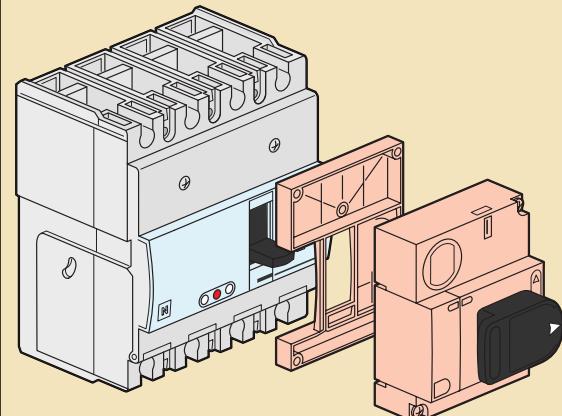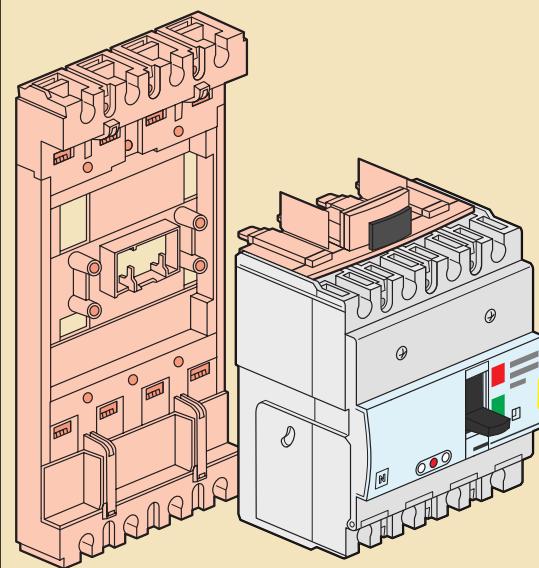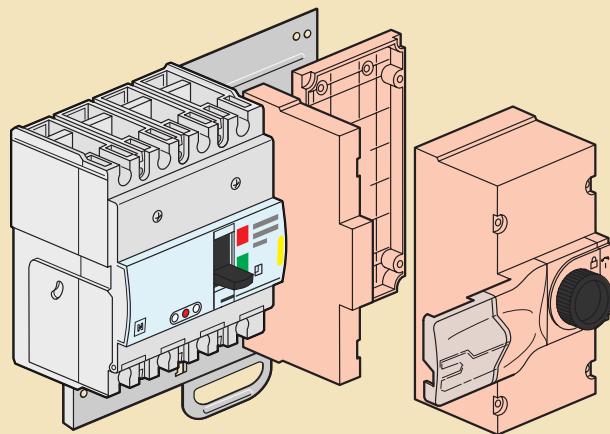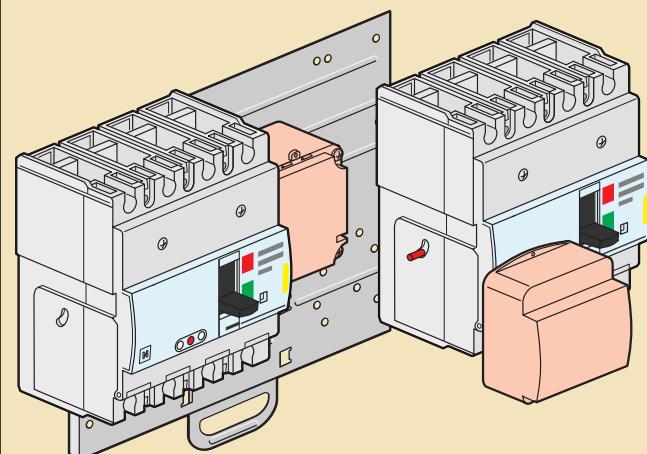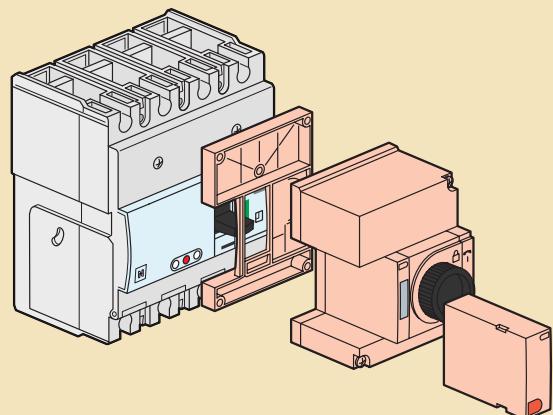DPX³ 160/250**■ Auxiliaries mounting****■ Direct rotary handle****■ Plug-in version****■ Side mounting motor-driven handle****■ Front mounting motor-driven handle**

DPX™ 250

thermal magnetic and electronic release MCCBs from 40 to 250 A



253 56



253 73



Dimensions (p. 57)

Electrical characteristics (p. 62-63)

MCCBs for switching, control isolation and protection of low voltage electrical lines

Can be fitted with auxiliaries (p. 42)

Can be used with earth leakage modules (p. 35) or with residual current relays (p. 43)

Supplied complete with:

- connection plates for bars
- upstream and downstream connection devices for lugs (width max. 20 mm)
- terminal shields

Conform to IEC 60947-2

Sealable adjustment

Can be mounted on plate in XL³ cabinets and enclosures

Pack	Cat.Nos	Thermal magnetic MCCBs - fixed version	Pack	Cat.Nos	Electronic release S1 MCCBs - fixed version
		Thermal adjustable from 0.64 to 1 In Magnetic adjustable from 3.5 to 10 In			Adjustment of Ir and Isd (p. 63) Instantaneous protection 40 A: if = 1 kA 100/160/250 A: if = 3 kA Indicator lamp Minimum current for indicator lamp operation (30 % of In) - green: normal - fixed red: I ≥ 0.9 Ir - flushing red: I ≥ 1.05 Ir Connector for test unit Dynamic selectivity 4P version: adjustment of neutral on front panel
		Breaking capacity Icu 36 kA (400 V~)			Breaking capacity Icu 36 kA (400 V~)
1	253 28 253 45	In (A) 40	1	254 01 254 07	In (A) 40
1	253 29 253 46	63	1	254 03 254 09	100
1	253 30 253 47	100	1	254 04 254 10	160
1	253 31 253 48	160	1	254 05 254 11	250
1	253 32 253 49	250			
	3P + N/2 In (A)				
1	253 41	160			
1	253 42	250			
		Breaking capacity Icu 70 kA (400 V~)			Breaking capacity Icu 70 kA (400 V~)
1	253 52 253 69	In (A) 40	1	254 13 254 19	In (A) 40
1	253 53 253 70	63	1	254 15 254 21	100
1	253 54 253 71	100	1	254 16 254 22	160
1	253 55 253 72	160	1	254 17 254 23	250
1	253 56 253 73	250			
	3P + N/2 In (A)				
1	253 66	250			

DPX™ 250

thermal magnetic and electronic release MCCBs from 40 to 250 A (continued)



260 55



260 53



265 32



265 46



Pack	Cat.Nos	
	Electronic release S2 MCCBs - fixed version	
	Adjustment of Ir, Isd, Tr, Tsd (p. 63) Instantaneous protection 40 A: if = 1 kA 100/160/250 A: if = 3 kA Indicator lamp Minimum current for indicator lamp operation (30 % of In) - green: normal - fixed red: $I \geq 0.9$ Ir - flushing red: $I \geq 1.05$ Ir Connector for test unit Logic and dynamic selectivity 4P version: adjustment of neutral on front panel	
	Breaking capacity Icu 36 kA (400 V~)	
1	3P 254 40	4P 254 45
1	254 41	254 46
1	254 42	254 47
1	254 43	254 48
	Breaking capacity Icu 70 kA (400 V~)	
1	254 50	254 55
1	254 51	254 56
1	254 52	254 57
1	254 53	254 58

Electronic earth leakage modules

Can be fitted onto DPX/DPX-I 250
 Adjustable, sealable sensitivity:
 0.03 - 0.3 - 1 - 3 A
 Adjustable, time delay: 0 - 0.3 - 1 - 3 s
 Test push-buttons
 Reset push-button
 Remote earth fault signalling contact
 Switch for mechanical tests (installation insulation test)
 Mounted underneath

Standard

	3P	4P	
1	260 54	260 51	In (A)
1		260 55	160

LED version

Monitors the isolation state of the installation via a series of LEDs

In (A)

	4P	
1	260 53	160
1	260 57	250

Pack	Cat.Nos	
1	3P 265 29	4P 265 30
1	265 31	265 32
1	265 33	265 34
1	265 35	265 36
	4P	
1	265 37	265 38
1	265 39	
1	263 99	098 19
1	263 43	

Plug-in version

A plug-in is a DPX fitted with tulip contacts mounted on a base

Tulip contacts

Set of tulip contacts (supplied with an incoming/outgoing protective cover)

Bases for DPX only

Accept DPX/DPX-I fitted with tulip contacts

Front terminal mounting base
Rear terminal mounting base with threaded rod

Flat rear terminal mounting base

Bases for DPX with earth leakage module

Front terminal mounting base
Rear terminal mounting base with threaded rod
Flat rear terminal mounting base

Accessories

Set of connectors (8-pin)
Set of connectors (6-pin)
Set of 2 extractor handle

Draw-out version

A DPX draw-out version is a plug-in DPX fitted with a "Debro-lift" mechanism which can be used to withdraw the DPX while keeping it on its base

"Debro-lift" mechanism

Supplied with a rigid slide and handle for drawing-out

For DPX base only

For DPX base with earth leakage module

Key lock for "Debro-lift" mechanism

Enable locking of DPX in drawn-out position

1 key Ronis for DPX only

1 key Ronis for motorised DPX or with rotary handle

Accessories for "Debro-lift" mechanism

Isolated handle for drawing-out

Signalling contact (plugged-in/drawn-out)

	3P	4P	
1	265 45	265 46	
1		265 47	
1	265 76	265 78	
1	265 75	265 74	

Supply inverter type

A supply inverter type is composed of one plate with interlock for 2 devices

Universal plate for MCCB or trip-free switch

fixed version

Universal plate for MCCB or trip-free switch

plug-in and draw-out version



For DPX-L 250 100 kA and Sg electronic release version, please consult us


DPX™ 250
equipment and accessories



262 22



262 79

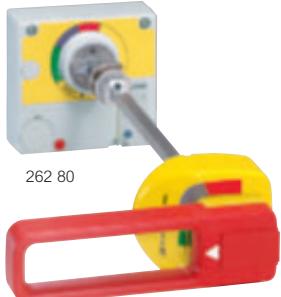

262 80



261 30

Pack **Cat.Nos** **Rotary handles**

1	262 22	Direct on DPX Standard (grey) For emergency use (red/yellow) - can be fitted on Cat.Nos 262 22, 262 41 or 262 81
1	262 24	Vari-depth handle IP 55 Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism
1	262 79	Standard (black)
1	262 80	Conversion kit for emergency use Can be fitted on Cat.No 262 79
1	262 92	Locking accessories
1	262 93	Eurolocks for vari-depth handle
1	262 94	Profalux for vari-depth handle
1	262 25	Ronis for vari-depth handle
		Eurolocks for direct handle

Pack **Cat.Nos** **Motor-driven handles**

1	261 30	Front operated 24 V~/— 230 V~
1	261 34	
1	261 59	Accessory Ronis locking accessory

Pack **Cat.Nos** **Accessories**

1	262 30	Insulated shields Set of 3
1	262 26 262 27	Sealable terminal shields Set of 2 long terminal shields
1	262 28 262 29	Set of 2 short terminal shields
1	262 21	Padlock For locking in "open" position
1	262 35	Cage terminals Set of 4 terminals for cable 185 mm ² max. (rigid) or 150 mm ² max. (flexible)
1	262 31	Adaptor for lug For connecting bare cables with wide lug
1	262 32	Set of 1 adaptor + insulated shields
1	262 33 262 34	Extended front terminals Set of 4
1	263 31 263 32	Spreaders Set of spreaders incoming or outgoing
1	265 27 265 28	Rear terminals Used to convert the fixed version with front terminals to the fixed version with rear terminals
1	048 68	Set of rear terminals, incoming or outgoing
		Set of flat rear terminals, incoming or outgoing
		Distribution terminal 250 A 250 A - 4 outputs 35 mm ² flexible and 2 outputs 25 mm ² flexible - Isc peak 36 kA Can be fitted directly onto downstream terminal of DPX 250/250 ER and DPX-IS 250

DPX™ 630

thermal magnetic and electronic release MCCBs from 250 to 630 A



255 37



Dimensions (p. 58)
Electrical characteristics (p. 62-63)

Moulded case MCCBs for switching, control isolation and protection of low voltage electrical lines

Can be fitted with auxiliaries (p. 42)

Can be used with earth leakage modules or with residual current relays (p. 43)

Supplied complete with:


- connection plates for bars

- terminal shields


Conform to IEC 60947-2 - Sealable adjustment

Can be mounted on plate in XL³ cabinets and enclosures

Pack	Cat.Nos	
		Thermal magnetic MCCBs - fixed version
1	3P 255 21	4P 255 36 In (A) 250
1	255 22	255 37 320
1	255 23	255 38 400
1	255 25	255 39 500
1	255 24	255 40 630
		3P + N/2 In (A)
1	255 32	320
1	255 33	400
1	255 35	500
1	255 34	630
		Breaking capacity Icu 36 kA (400 V~)
1	3P 255 42	4P 255 57 In (A) 320
1	255 43	255 58 400
1	255 45	255 59 500
1	255 44	255 60 630
		3P + N/2 In (A)
1	255 52	320
1	255 53	400
1	255 55	500
1	255 54	630
		Breaking capacity Icu 70 kA (400 V~)

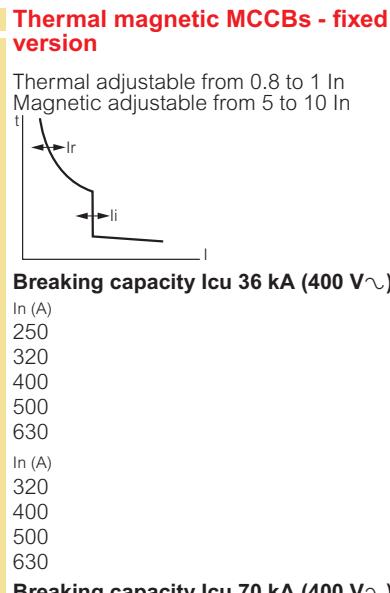

Pack	Cat.Nos	
		DPX 630 electronic release S1
1	3P 256 01	4P 256 05 In (A) 250
1	256 02	256 06 400
1	256 03	256 07 630
		Breaking capacity Icu 36 kA (400 V~)
1	3P 256 10	4P 256 14 In (A) 400
1	256 11	256 15 630
		Breaking capacity Icu 70 kA (400 V~)

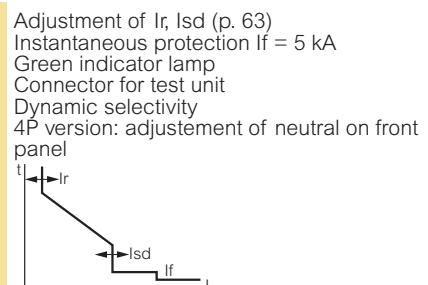

In (A)
250
400
630
400
630

Breaking capacity Icu 70 kA (400 V~)

DPX™ 630


thermal magnetic and electronic release MCCBs
from 250 to 630 A (continued)



256 35



260 63

Pack	Cat.Nos		Electronic release S2 MCCBs - fixed version	
			Adjustment of Ir, Isd, Tr, Tsd (opposite) Instantaneous protection If = 5 kA Green indicator lamp Connector for test unit Logic and dynamic selectivity 4P version: adjustment of neutral on front panel	
				
			Breaking capacity Icu 36 kA (400 V~)	
1	256 26	3P	In (A)	
1	256 27	256 30	250	
1	256 28	256 31	400	
1	256 29	256 32	630	
			Breaking capacity Icu 70 kA (400 V~)	
1	256 35	256 39	In (A)	
1	256 36	256 40	400	
1	256 43	256 47	630	
1	256 44	256 48	Breaking capacity Icu 100 kA (400 V~)	
			In (A)	
			400	
			630	

Earth leakage modules

Can be fitted onto DPX/DPX-I 630
Adjustable, sealable sensitivity:
0.03 - 0.3 - 1 - 3 A
Adjustable, time delay: 0 - 0.3 - 1 - 3 s
Test push-button
Reset push-button
Remote earth fault signalling contact
Switch for mechanical tests (installation insulation test)
Mounted underneath
230-500 V~

Standard

In
400 A
630 A

LED version

Monitors the isolation state of the installation via a series of LEDs
In


		4P	
1	260 60	260 61	
1	260 64	260 65	

	4P	
1	260 63	400 A
1	260 67	630 A

DPX™ 630


■ Performance data

S1 - Adjustment of Ir, Isd



- Long delay protection against overloads with an adjustable threshold based on the rms value of the current:
 $Ir = 0.4 - 0.5 - 0.7 - 0.8 - 0.95 - 1 \times In$ (8 steps)
- $Tr = 5 \text{ s}$ (fixé dat 6 t r)
- Short delay protection against short-circuits with an adjustable Im threshold:
 $I_s \in 1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10 \times Ir$ (8 steps)
- $Tsd = 0.05 \text{ s}$ (fixed)
- Instantaneous protection if with fixed threshold: $If = 5 \text{ kA}$

S2 - Adjustment of Ir, Tr, Isd, Tsd




- Long delay protection against overloads with an adjustable threshold based on the rms value of the current:
 $Ir = 0.4 - 0.5 - 0.7 - 0.8 - 0.9 - 0.95 - 1 \times In$ (8 steps)
- $Tr = 5 - 10 - 20 - 30 \text{ s}$ (at 6 Ir) (4 steps)
- Short delay protection against short-circuits with an adjustable Isd threshold:
 $I_s \in 1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10 \times Ir$ (8 steps)
- $Tsd = 0 - 0.1 - 0.2 - 0.3 \text{ s}$ (4 steps)
- $Tsd = 0.01 - 0.1 - 0.2 - 0.3 \text{ s}$ at $12 \times Ir$ (I2 t constant) (4 steps)
- Instantaneous protection against short-circuits with fixed threshold: $If = 5 \text{ kA}$



For DPX-L 630 100 kA and Sg electronic release version, please consult us

DPX™ 630

equipment and accessories

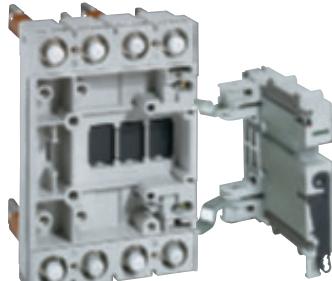

265 57

265 67

262 50

262 51

262 48

Pack	Cat.Nos		Plug-in version
1	3P 265 50	4P 265 51	A plug-in is a DPX fitted with tulip contacts mounted on a base
	Tulip contacts		Set of tulip contacts (supplied with an incoming/outgoing protective cover)
1	265 52	265 53	Bases for DPX only
1	265 54	265 55	Accept DPX/DPX-I fitted with tulip contacts Front terminal mounting base Rear terminal mounting base with threaded rod
1	265 56	265 57	Flat rear terminal mounting base
	Bases for DPX with earth leakage module		Front terminal mounting base Rear terminal mounting base with threaded rod
1	265 58	265 59	Flat rear terminal mounting base
1	265 60		Accessories
1	263 68	263 99	Set of 2 extractor handle Set of connectors (8-pin)

Pack	Cat.Nos		Rotary handles (continued)
1	262 81	262 82	Vari-depth handle IP 55
1	262 92	262 93	Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism Standard (grey) For emergency use (red/yellow) can be fitted on Cat.Nos 262 81 or 262 41
1	262 94	262 25	Locking accessories
1	262 25		Eurolocks for vari-depth handle Profalux for vari-depth handle Ronis for vari-depth handle Eurolocks for direct handle
	Motor-driven handles		
1	261 40	261 44	Front operated 24 V~/= 230 V~
1	261 59		Accessory Ronis locking accessory

Draw-out version			
1	3P 265 66	4P 265 67 265 68	A DPX draw-out version is a plug-in DPX fitted with a "Debro-lift" mechanism which can be used to withdraw the DPX while keeping it on its base
1	"Debro-lift" mechanism		Supplied with a rigid slide and handle for drawing-out
1	For DPX base only		For DPX base only
1	For DPX base with earth leakage module		For DPX base with earth leakage module
	Key-lock for "Debro-lift" mechanism		Enable locking of DPX in drawn-out position
1	265 76	265 78	1 key Ronis for DPX only 1 key Ronis for motorised DPX or with rotary handle
1	265 75	265 74	Accessories for "Debro-lift" mechanism Isolated handle for drawing-out Signalling contact (plugged-in/drawn-out)

Accessories			
1	262 30		Insulated shields
1	3P 262 44	4P 262 45	Set of 3
1	262 40		Sealable terminal shields
1	262 50		Set of 2
1	262 51		Padlock
1	262 46		For locking in "OPEN" position
1	262 47		Cage terminals
1	3P 262 48	4P 262 49	Set of 4 terminals for cable 300 mm ² max. (rigid) or 240 mm ² max. (flexible)
1	263 50	263 51	Set of 4 high-capacity terminals for cable 2 x 240 mm ² (rigid) or 2 x 185 mm ² (flexible)
1	263 52	265 53	Adaptor for lug For connecting bare cables with wide lugs Set of 4 adaptors + insulated shields
	Extended front terminals		Set of 4
	Spreaders		Set of incoming or outgoing spreaders
	Rear terminals		Used to convert the fixed version with front terminals to the fixed version with rear terminals
1	263 50	263 51	Set of incoming or outgoing swivel terminals
1	263 52	265 53	Set of incoming or outgoing flat terminals

Rotary handles			
1	262 41	262 24	Direct on DPX Standard (grey) For emergency use (red/yellow) - can be fitted on Cat.Nos 262 22, 262 41 or 262 81

DPX™ 1250 and 1600

thermal magnetic and electronic release MCCBs from 800 to 1600 A



258 16



258 23



Dimensions (p. 59)
Electrical characteristics (p. 62-63)

Moulded case MCBS for switching, control isolation and protection of low voltage electrical lines

Can be fitted with auxiliaries (integrated terminal blocks)

Can be used with earth leakage modules or with residual current relays (p. 43)

Supplied complete with:

- connection plates for bars

- terminal shields

Conform to IEC 60947-2


Fixed version - Sealable adjustment

Pack	Cat.Nos	Thermal magnetic MCCBs - fixed version		Pack	Cat.Nos	Electronic release S2 MCCBs - fixed version	
		Thermal adjustable from 0.8 to 1 In Magnetic adjustable from: 5 to 10 In 				Adjustment of Ir, Isd, Tr, Tsd Instantaneous protection If = 20 kA (for In 1600 A) Indicator lamp Minimum current for indicator lamp operation (20 % In): green: normal; fixed red: $I \geq 0.9$ Ir; flashing red: $I \geq 1.05$ Ir Connector for test unit Logic and dynamic selectivity 	
1	258 02	3P	258 09 ⁽¹⁾	4P	In (A)	257 26	257 30 ⁽²⁾
1	258 03		258 10 ⁽¹⁾		800	257 27	257 31 ⁽²⁾
1	258 04		258 11 ⁽¹⁾		1000	257 28	257 32 ⁽²⁾
					1250		
		Breaking capacity Icu 50 kA (400 V~)				Breaking capacity Icu 50 kA (400 V~)	
1	258 16	3P	258 23 ⁽¹⁾	4P	In (A)	257 34	257 38 ⁽²⁾
1	258 17		258 24 ⁽¹⁾		800	257 35	257 39 ⁽²⁾
1	258 18		258 25 ⁽¹⁾		1000	257 36	257 40 ⁽²⁾
		Breaking capacity Icu 70 kA (400 V~)				Breaking capacity Icu 70 kA (400 V~)	
		Electronic release S1 MCCBs - fixed version Adjustment of Ir, Isd Instantaneous protection If = 20 kA (for In 1600 A) Indicator lamp Minimum current for indicator lamp operation (20 % In): green: normal; fixed red: $I \geq 0.9$ Ir; flashing red: $I \geq 1.05$ Ir Connector for test unit Dynamic selectivity 				Adjustment of Ir, Isd, Tr, Tsd Instantaneous protection If = 20 kA (for In 1600 A) Indicator lamp Minimum current for indicator lamp operation (20 % In): green: normal; fixed red: $I \geq 0.9$ Ir; flashing red: $I \geq 1.05$ Ir Connector for test unit Logic and dynamic selectivity 	
		Breaking capacity Icu 50 kA (400 V~)				Breaking capacity Icu 50 kA (400 V~)	
1	257 02	3P	257 06 ⁽²⁾	4P	In (A)	257 34	257 38 ⁽²⁾
1	257 03		257 07 ⁽²⁾		800	257 35	257 39 ⁽²⁾
1	257 04		257 08 ⁽²⁾		1250	257 36	257 40 ⁽²⁾
		Breaking capacity Icu 70 kA (400 V~)				Breaking capacity Icu 70 kA (400 V~)	
1	257 10	3P	257 14 ⁽²⁾	4P	In (A)	257 34	257 38 ⁽²⁾
1	257 11		257 15 ⁽²⁾		800	257 35	257 39 ⁽²⁾
1	257 12		257 16 ⁽²⁾		1250	257 36	257 40 ⁽²⁾
		Breaking capacity Icu 100 kA (400 V~)				 For DPX-L 1250 100 kA and Sg electronic release version, please consult us	

(1) Neutral without protection

(2) Neutral settings 0 - 0.5 - 1 N (0 - 50% - 100% Neutral)

DPX™ 1600 equipment and accessories

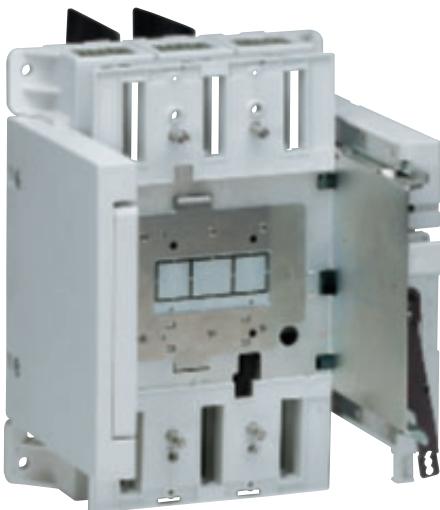

265 84 (supplied assembled)



262 60



262 70



262 67 + 262 68

Pack	Cat.Nos	Draw-out version	Pack	Cat.Nos	Motor-driven handles
1 1	3P 265 82 4P 265 84	A DPX draw-out version is a plug-in DPX fitted with a "Debro-lift" mechanism which can be used to withdraw the DPX while keeping it on its base Draw-out base Base for DPX 1600 supplied with "Debro-lift" assembled a rigid slide and handle for drawing-out Front terminals Rear terminals	1	261 54	Factory assembled Front operated 230 V~
1 1	265 76 265 80	Key lock for "Debro-lift" mechanism Enable locking of DPX in drawn-out position One key Ronis for DPX only Two key Ronis (one key supplied) for motorised DPX or with rotary handle	1	261 24	For DPX1600 up to 1250 A Front operated 24 V~/=
1 1	265 75 265 74	Accessories for "Debro-lift" mechanism Isolated handle for drawing-out Signalling contact (plugged-in/drawn-out)	1	261 25	48 V~/=
			1	261 23	230 V~/=
			1	261 19	For DPX1600 In = 1600 A 24 V~/=
			1	261 28	48 V~/=
			1	261 27	230 V~/=
			1	261 59	Locking accessory for motor-driven handles Ronis locking accessory
			1	261 58	Profalux locking accessory
Pack	Cat.Nos	Supply inverter type	Pack	Cat.Nos	Accessories
1	264 10	A supply inverter type is composed of one plate with interlock for 2 devices	1	262 66	Insulated shields Used to isolate the connections between each pole
1	264 05	Plate for MCCBs or trip-free switch fixed version	1	3P 262 64 4P 262 65	Set of 3
		Plate for MCCBs or trip-free switch plug-in and draw-out version	1	262 60	Sealable terminal shields Set of 2
			1	262 69	Padlock For locking in "open" position
			1	262 70	Cage terminals Set of 1 terminal for cables without lug 2 x 2 4 0mm² for rigid cable or 2 x 1 8 5mm² for flexible cable
					Set of 1 high-capacity terminal for cables without lug 4 x 2 4 0mm² for rigid cable 4 x 1 8 5mm² for flexible cable
			1	262 67	Extended front terminals Set of 4
			1	262 68	Short terminals for 630 - 1250 A (2 bars max. per pole)
			1	3P 262 73 4P 262 74	Long terminals for 1600 A (3 bars max. per pole)
			1	263 80	Spreaders Set of incoming or outgoing spreaders
			1	263 82	Rear terminals Used to convert the fixed version with front terminals to the fixed version with rear terminals
			1	263 83	Set of incoming or outgoing rear terminals
					Short terminals
					Long terminals

Red catalogue numbers: New products

DPX™ auxiliaries for DPX, DPX-I and DPX-IS



261 85



261 93


Pack	Cat.Nos	Auxiliary contact or fault signal
1	261 60	For signalling the state of the contacts or opening of the MCCB on a fault For DPX/DPX-I/DPX-IS Changeover switch 3 A - 240 V~

		Releases	Allow remote tripping of a DPX	
		Shunt releases For DPX-IS/DPX-I and DPX Shunt inrush power 300 VA Coil voltage 24 V~/± Coil voltage 48 V~/± Coil voltage 110 V~/± Coil voltage 230 V~/± Coil voltage 400 V~/±		
1	261 64	For DPX-I, DPX 250, 630 and DPX-IS 1600		
1	261 65			
1	261 66			
1	261 67			
1	261 68			
		Undervoltage releases For DPX-IS/DPX-I and DPX Undervoltage power consumption 5 VA Coil voltage 24 V~ Coil voltage 24 V~ Coil voltage 48 V~ Coil voltage 110 V~ Coil voltage 230 V~ Coil voltage 400 V~		
1	261 70	For DPX-I, DPX 250, 630 and DPX-IS 1600		
1	261 80			
1	261 71			
1	261 81			
1	261 72			
1	261 76			
1	261 82			
1	261 73			
1	261 83			
1	261 74			
		Time-lag (ms) undervoltage releases Allow remote tripping of a DPX Prevent false tripping in the event of AC supply microbreakers Require a time-lag module connected to the undervoltage releases below	Number of modules	
1	261 90	Time-lag modules 230 V~	3	
1	261 91	Time-lag modules 400 V~	3	
1	261 75	Undervoltage releases For DPX-IS 250, 630		
1	261 85	Undervoltage releases For DPX 250 to 1600 and DPX-IS 1600		

		Electronic test unit	Test connector and software for connecting DPX to a PC Supplied with test software	
1	261 97			

		Automation control unit	For setting the conditions for supply inversion, generator on/off status acquisition for DMX and DPX circuit-breakers, open/closed Power supply: 230 V~ and 12-24-48 V~ Connection by plug-in terminals	
1	261 93			
1	261 94			

DPX™ auxiliaries for DPX, DPX-I and DPX-IS

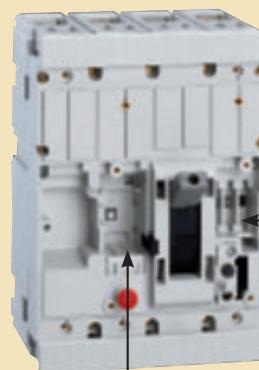

Auxiliary contact or fault signal

A single Cat.No 261 60 auxiliary contact or fault signal



Undervoltage releases



Shunt releases



Time-lag undervoltage releases

Max. number of contacts per DPX-IS device

	Device	AC	Auxiliary contact EBAC	FS	Shunt release or undervoltage release
Without release	DPX-IS 250	1	2	-	-
With release	DPX-IS 250	1	1	1	1

AC = auxiliary contact

EBAC = "early" auxiliary contact

FS = break on trip contact

Max. number of contacts per DPX device

Device	Auxiliary contact AC	FS	Shunt release or undervoltage release
DPX 250	2	1	1
DPX 630	2	2	1
DPX 1600	3	1	1

residual current relay and coils



260 88

260 98

260 93 coil for use with relay

Add residual current protection to DPX³/DPX trip-free switches and DPX³/DPX MCCBs equipped with release

Pack	Cat.Nos	Residual current relay for DPX/DPX³
1	260 88	<p>Detects fault currents, and, when used with a shunt trip or an undervoltage release, it gives the trip command to a MCCB or a switch</p> <ul style="list-style-type: none"> • Comprises: <ul style="list-style-type: none"> - a tinged, sealable window - an auxiliary contact - a green Led indicating energisation - 3 yellow Leds indicating respectively the max. phase earth insulation current: 20, 40 and 60 % - a red Led indicating Fixed: exceeding of the insulation fault current value Flashing: breaking of one of the connections between coils and relays • For use with coils: <ul style="list-style-type: none"> - Ø35 and 80 mm Adjustable sensitivity: 0.03, 0.05, 0.075, 0.1, 0.15, 0.2, 0.3, 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø110 to 210 mm Adjustable sensitivity: 0.3, 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø150 mm Adjustable sensitivity: 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø300 mm Adjustable sensitivity: 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A • Adjustable trip: 0, 0.15, 0.25, 0.5, 1, 2.5, 5 seconds • Supply voltage: 230/240 V - 50/60 Hz

Number of modules
2

Coils

For use with residual current relay Cat.No 260 88
1 coil per DPX, DPX-I and DPX³

1	260 92	Coil Ø35 mm - 160 A max.
1	260 93	Coil Ø80 mm - 400 A max.
1	260 94	Coil Ø110 mm - 600 A max.
1	260 95	Coil Ø140 mm - 1200 A max.
1	260 96	Coil Ø210 mm - 1800 A max.
1	260 97	Coil Ø150 mm - open - 1200 A max.
1	260 98	Coil Ø300 mm - open - 2000 A max.

Viking 3 disconnector block for measurement 1 connection


With its accessories, allows intervention (measurement, maintenance, etc) on a current, voltage and power measuring circuit by keeping the current transformer secondary circuit closed

Colour	Nominal cross section (mm²)	Capacity rigid wire (mm²)	Capacity flexible wire (mm²)	Pitch (mm)
25	371 92	Grey	4	0.25 to 4

residual current relay and coils


■ Residual current relay

Cat.No 260 88

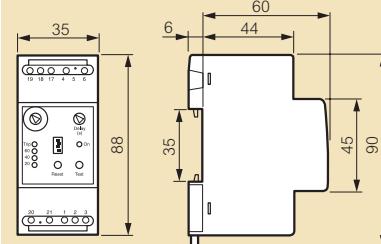


■ Coils

Cat.Nos 260 92/93/94/95/96

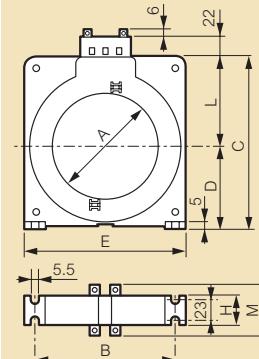


Cat.No 260 97

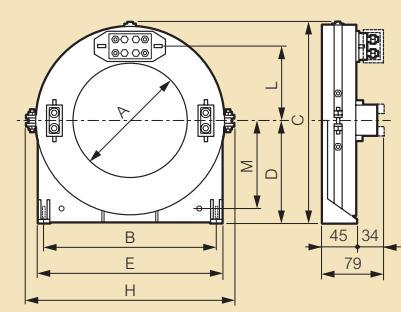

Cat.Nos	A	B	C	D	E	H	L	M
260 92	35	75	85	42	92	36	43	56
260 93	80	108	132	67	125	36	65	56
260 94	110	148	170	86	165	36	84	56
260 95	140	177	206	104	200	36	102	56
260 96	210	270	295	150	290	44	145	64
260 97	150	225	259	133	245	275	95	113

Cat.No 260 98

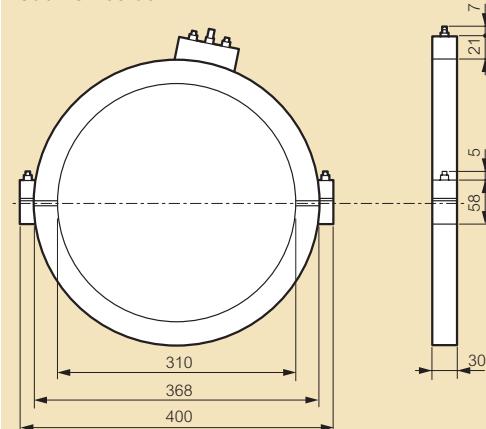

DPX³/DPX magnetic only

motor protection MCCBs up to 400 A



420 713



Dimensions (see opposite)

For switching, control isolation and protection of three-phase motors
Conform to IEC 60947-2

Pack	Cat.Nos	DPX ³ 160
		Fixed magnetic Can be mounted on rail $\sqcup\!\sqcup$ or on plate in XL ³ cabinets and enclosures Supplied with cage terminals 70 mm ² max. (flexible cable) and up to 95 mm ² max. with accessory Can be fitted with auxiliaires (p. 32)
		Breaking capacity Icu 16 kA (400 V\sim)
1	420 710	In (A) 3P 16
1	420 711	25
1	420 712	50
1	420 713	63
		Breaking capacity Icu 25 kA (400 V\sim)
1	420 714	16
1	420 715	25
1	420 716	50
1	420 717	63

Pack	Cat.Nos	DPX ³ 250
		Adjustable magnetic Can be mounted on rail $\sqcup\!\sqcup$ or on plate in XL ³ cabinets and enclosures Supplied with cage terminals 120 mm ² max. (flexible cable) and up to 150 mm ² max. with accessory Can be fitted with auxiliaires (p. 32)
		Breaking capacity Icu 36 kA (400 V\sim)
1	420 718	In (A) 3P 100
1	420 719	160
1	420 720	200
1	420 721	250
		Breaking capacity Icu 25 kA (400 V\sim)
1	420 722	100
1	420 723	160
1	420 724	200
1	420 725	250

Pack	Cat.Nos	DPX 630 electronic
		Adjustable Can be mounted on plate in XL ³ cabinets and enclosures Can be fitted with auxiliaires (p. 42)
		Breaking capacity Icu 36 kA (400 V\sim)
1	420 726	In (A) 3P 320
1	420 727	400
		Breaking capacity Icu 70 kA (400 V\sim)
1	420 728	320
1	420 729	400

DPX-I™ trip-free switches

125 to 1600 A



420 299



253 99



Dimensions (p. 54 to 59)

Trip-free switches for on-load circuit breaking and isolation of low voltage electrical circuits

Can be associated to earth leakage modules or to corresponding DPX residual current relays (p. 43)

Mount on rail up to DPX³ 250 with plate Cat.No 421 072 (DPX³-I 160) and Cat.No 421 071 (DPX³ 250)

Conform to IEC 60947-3

Category of use AC 23 A

Connection identical to corresponding DPX

Pack	Cat.Nos		DPX ³ -I 160
1	3P 420 198	4P 420 199	In (A) 160
1	4P with earth leakage module 420 197		160

DPX ³ -I 250			
1	3P 420 299	4P 420 300	In (A) 250
1	4P with earth leakage module 420 298		250

DPX-I 250			
1	3P 253 98	4P 253 99	In (A) 250

DPX-I 630			
1	3P 255 86	4P 255 87	In (A) 400
1	255 88	255 89	630

DPX-I 1600			
1	3P 257 94	4P 257 95	In (A) 800
1	257 96	257 97	1250
1	257 98	257 99	1600

Common auxiliaries to DPX³ (p. 32)
and DPX (p. 42)

DPX-I™ trip-free switches

125 to 1600 A

■ Electrical characteristics

	DPX ³ -I 160	DPX ³ -I 250	DPX-I 250	DPX-I 630	DPX-I 1600
Rated operating voltage Ue (V) direct	50/60 Hz 690 ⁽¹⁾	690 ⁽¹⁾	690	690	690
Rated insulation voltage Ui (V _~)	250	250	250	250	250
Rated impulse withstand voltage Uimp (kV)	800	800	690	690	690
Rated closing capacity on 400 V short-circuit Icm (kA)	8	8	8	8	8
Short-time resistive current t = 1 s Icw (kA)	3	3	4.3	13	40
Endurance (o.c cycle)					
mechanical	25000	25000	20000	15000	10000
electrical	8000	8000	8000	5000	2000 ⁽²⁾
Conventional thermal current (A)	160	250	250	630	1600
Nominal current of use (A) AC 23 A (690 V _~)	160 (160 V)	250 (250 V)	250	630	1600
DC 23 A (250 V _~)	160	160	250	630	-

(1) 500 V for DPX³ - I with earth leakage module

(2) Up to 1250 A

■ Dimensions

Dimensions of DPX-I identical to corresponding DPX

DPX-I	Dimensions
DPX ³ -I 160	DPX ³ 160 (see p. 54)
DPX ³ -I 250	DPX ³ 250 (see p. 55)
DPX-I 250	DPX 250 (see p. 57)
DPX-I 630	DPX 630 (see p. 58)
DPX-I 1600	DPX 1600 (see p. 59)

■ Choice of faceplates and distribution equipment

Equipment of DPX-I identical to corresponding DPX³/DPX:

Devices	XL ³ 400	XL ³ 800	XL ³ 4000
DPX ³ /DPX ³ -I 160	(p. 46)	(p. 48)	(p. 50)
DPX ³ /DPX ³ -I 250	(p. 46)	(p. 48)	(p. 50)
DPX/DPX-I 250	(p. 46)	(p. 48)	(p. 52)
DPX/DPX-I 630	(p. 46)	(p. 48)	(p. 52)
DPX/DPX-I 1600		(p. 48)	(p. 52)

XL³ 400
 equipment selection

Device	Fixing	Position	Configuration	Fixing plate
FIXING ON PLATE				
DPX³ 160 (Combination possible with DPX ³ 250)	Cabinet or enclosure	vertical	with or without integrated e.l.c.bs and without side motor operator	202 11 + 421 071
			with or without integrated e.l.c.bs and with side motor operator	202 11 + 421 068
		horizontal	direct rotary handle ⁽¹⁾	202 09
		vertical	manual supply invertor ⁽²⁾	202 11 + 421 058
	Cable sleeve	vertical	with or without integrated e.l.c.bs	202 13
DPX³ 250 (Combination possible with DPX ³ 160)	Cabinet or enclosure	vertical	with or without integrated e.l.c.bs and without side motor operator	202 11 + 421 072
			with or without integrated e.l.c.bs and with side motor operator	202 11 + 421 069
		horizontal	direct rotary handle ⁽¹⁾	202 09
		vertical	manual supply invertor ⁽²⁾	202 11 + 421 058
	Cable sleeve	horizontal	with or without integrated e.l.c.bs	202 15
DPX 250	Cabinet or enclosure	vertical	with or without integrated e.l.c.bs	202 17
			1 to 2 devices, no e.l.c.bs	202 20
		horizontal	device only in central position	202 21
		vertical	1 to 2 devices, with downstream e.l.c.bs	202 22
	Cable sleeve	vertical	with centred downstream e.l.c.bs	202 23
			with or without downstream e.l.c.bs	202 24
		horizontal	device only	202 28
DPX 630	Cabinet or enclosure	vertical	with downstream e.l.c.bs	202 29
			1 device, no e.l.c.bs	202 20
		horizontal	device only in central position	202 21
		vertical	1 device, with e.l.c.bs	202 22
	Cable sleeve	vertical	with centred downstream e.l.c.bs	202 23
			device only	202 25
		horizontal	device only	202 28
		vertical	with downstream e.l.c.bs	202 29

(1) Use curved doors only

(2) When the MCCB is fixed at the top or at the bottom of the enclosure, use 200 mm height faceplate Cat.No 202 15

(3) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 203 11

(4) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 203 17

	Faceplate for devices		
	Height (mm)	Metal	Insulating
	300	203 10	203 60
	300	203 10	203 60
	300	203 09	-
	300	203 10	203 60
	150	203 13	203 65
	300	203 18	-
	300	203 10	203 60
	300	203 09	-
	300	203 10	203 60
	200	203 17	203 66
	300	203 18	-
	400	203 20	203 70
	400	203 21	203 71
	600	203 22	203 72
	600	203 23	203 73
	200	203 24	203 74
	400	203 28	-
	800	203 29	-
	400	203 20	203 70
	400	203 21	203 71
	600	203 22	203 72
	600	203 23	203 73
	300	203 25	-
	400	203 28	-
	800	203 29	-



202 11
Fixing plate equipped with a rail
for mounting DPX³ with fixing
adaptor
For vertical mounting



202 13
Fixing plate for DPX³ 160 thermal-magnetic
For horizontal mounting



203 10
1/4 turn metal faceplate
for DPX³ in vertical
position
Height 300 mm



203 13
1/4 turn metal faceplate
for DPX³ 160 in vertical
position
Height 150 mm



202 20
Fixing plate for 1 to 2
DPX 250 or 1 DPX 630
and 1 DPX 250
For vertical mounting



202 24
Fixing plate for 1 DPX 250
with or without e.l.c.bs
For horizontal mounting



203 20
1/4 turn metal faceplate
for 1 to 2 DPX 250 or 1
DPX 630 and 1 DPX 250
For vertical mounting
Height 400 mm



203 24
1/4 turn metal faceplate for
1 DPX 250 with or without
e.l.c.bs
For horizontal mounting
Height 200 mm



202 17
Fixing plate for DPX³ 160
and DPX³ 250
For vertical mounting



203 18
1/4 turn metal faceplate
for DPX³
Height 300 mm

XL³ 800
equipment selection

Device	Fixing	Position	Configuration	
			XL ³ 800 - 24 modules	
FIXING ON PLATE				
DPX³ 160 (Combination possible with DPX ³ 250)	Cabinet or enclosure	vertical	without side motor operator	
			with side motor operator	
			direct rotary handle	
			manual supply inverter	
		horizontal	automatic supply inverter	
			with or without integrated e.l.c.bs	
DPX³ 250 and DPX³ 160-125 electronic release (Combination possible with DPX ³ 160)	Cabinet or enclosure	vertical	without side motor operator	
			with side motor operator	
			direct rotary handle	
			manual supply inverter	
		horizontal	automatic supply inverter	
			with or without integrated e.l.c.bs	
DPX 250 (Combination possible with DPX 630)	Cabinet or enclosure	vertical	1 to 3 devices, no e.l.c.bs	
			1 to 3 devices with downstream e.l.c.bs	
		horizontal	supply inverstor + motor operators	
			with or without downstream e.l.c.bs	
			with or without downstream e.l.c.bs + motor operators	
DPX 630 (Combination possible with DPX 250)	Cabinet or enclosure	vertical	1 to 3 devices, no e.l.c.bs	
		horizontal	1 to 3 devices with downstream e.l.c.bs	
			with or without downstream e.l.c.bs	
DPX 1600	Cabinet or enclosure	vertical	device only	
		horizontal	device only	

XL³ 800 - 36 modules

FIXING ON PLATE				
DPX³ 160	Cabinet or enclosure	vertical	without side motor operator	
			with side motor operator	
			manual supply inverter	
DPX³ 250	Cabinet or enclosure	vertical	without side motor operator	
			with side motor operator	
			manual supply inverter	
DPX 250	Cabinet or enclosure	vertical	no e.l.c.bs	
			with downstream e.l.c.bs	
DPX 630	Cabinet or enclosure	vertical	no e.l.c.bs	
			with downstream e.l.c.bs	
DPX 1600	Cabinet or enclosure	vertical	device only	
			device only	


206 11


Fixing plate equipped with a rail for DPX³, vertical mounting


206 17

Fixing plate for DPX³ 250, horizontal mounting


208 13

1/4 turn metal faceplate DPX³ 160, horizontal mounting

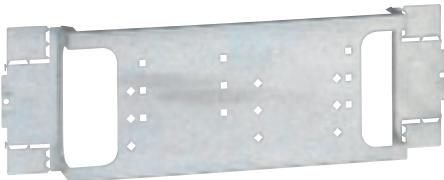	Fixing plate	Faceplate for devices		
		Height (mm)	1/4 turn	screw
XL³ 800 - 24 modules				
206 11 + 421 071	300	208 10		209 10
206 11 + 421 068	300	208 10		209 10
206 08 + 421 071	300	208 05		209 05
206 11 + 421 058	300	208 10		209 10
206 13 + 420 558	300	208 10		209 10
206 15	150	208 13		209 13
206 11 + 421 072	300	208 10 ⁽²⁾		209 10
206 11 + 421 069	300	208 10 ⁽²⁾		209 10
206 08 + 421 072	300	208 05		209 05
206 11 + 421 058	300	208 10 ⁽²⁾		209 10
206 13 + 421 058	300	208 10 ⁽²⁾		209 10
206 17	200	208 17		209 17
206 20	400	208 20		209 20
206 22	600	208 22		209 22
206 68 ⁽¹⁾	400	-		-
206 24	200	208 24		209 24
206 21	200	-		209 24
206 20	400	208 20		209 20
206 22	600	208 22		209 22
206 23	300	208 23		209 21
206 30	400	208 30		209 30
206 30	400	208 34		209 34
XL³ 800 - 36 modules				
206 61 + 421 071	300	-		209 60
206 61 + 421 068	300	-		209 60
206 61 + 420 559	300	-		209 60
206 61 + 421 072	300	-		209 60
206 61 + 421 072	300	-		209 60
206 61 + 420 559	300	-		209 60
206 70	400	-		209 70
206 72	600	-		209 72
206 70	400	-		209 70
206 72	600	-		209 72
206 80	400	-		209 80
206 80	400	-		209 84
 206 24 Fixing plate for DPX 250 with or without e.l.c.bs, horizontal mounting				
 208 34 1/4 turn metal faceplate DPX 1600, horizontal mounting				
<small>(1) Faceplate supplied with the kit</small> <small>(2) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 209 27</small>				

XL³ 4000
 equipment selection

Device	Version	Position	Configuration	Connection terminals
FIXING ON PLATE				
DPX³ 160 (Combination possible with DPX ³ 250)	fixed	vertical	without side motor-operator	front
			with side motor-operator	front
			without front motor-operator	front or rear
			with front motor-operator	front or rear
			with rotary handle	front
			manual supply inverter	front
			automatic supply inverter	front
	draw-out	horizontal	-	front
			with or without front motor-operator	front or rear
			with or without front motor-operator	front or rear
			with rotary handle	front or rear
			manual or automatic supply inverter	front or rear
			with or without front motor-operator	front or rear
			-	front
DPX³ 250 (Combination possible with DPX ³ 160 thermal-magnetic)	fixed	vertical	without side motor-operator	front
			with side motor-operator	front
			without front motor-operator	front or rear
			with front motor-operator	front or rear
			with rotary handle	front
			manual supply inverter	front
			automatic supply inverter	front
	draw-out	horizontal	-	front
			with or without front motor-operator	front or rear
			with or without front motor-operator	front or rear
			with rotary handle	front or rear
			manual or automatic supply inverter	front or rear
			with or without front motor-operator	front or rear
			-	front



206 11

Fixing plate equipped with a rail L-shaped bracket for DPX³, vertical mounting


 421 071
 Rail fixing adaptor for DPX³


206 17

Fixing plate for DPX³ 250, horizontal mounting

	XL ³ 4000 - 24 modules							XL ³ 4000 - 36 modules				
	Spacer	Fixing device	Plate	Metal faceplate				Fixing device	Plate	Metal faceplate		
				Height (mm)	1/4 turn	Screw	Lock			Height (mm)	Screw	Lock
-	-	-	206 11 + 421 071	300	208 10	209 10	-	-	206 61 + 421 071	300	209 60	-
-	-	-	206 11 + 421 068	300	208 10	209 10	-	-	206 61 + 421 068	300	209 60	-
207 50	207 90	207 49	300	208 10	209 10	-	-	207 61	207 49	300	209 60	-
-	207 90	207 49	300	208 10	209 10	-	-	207 61	207 49	300	209 60	-
-	-	-	206 08 + 421 071	300	208 05	209 05	-	-	-	-	-	-
207 50	207 90	207 49	300	208 05	209 05	-	-	207 61	207 49	300	209 65	-
-	-	-	206 11 + 421 058	300	208 10	209 10	-	-	-	-	-	-
207 50	206 63	206 71	300	208 10	209 10	-	-	-	-	-	-	-
-	-	-	206 13 + 421 058	300	208 10	209 10	-	-	-	-	-	-
-	206 63	206 71	300	208 10	209 10	-	-	-	-	-	-	-
-	-	206 15	150	208 13	209 13	-	-	-	-	-	-	-
-	-	207 94	150	208 13	209 13	-	-	-	-	-	-	-
207 50	207 91	207 59	400	-	-	212 11	-	-	-	-	-	-
	207 91	207 59	400	-	-	212 08	-	-	-	-	-	-
207 50	206 69	206 81	400	-	-	212 11	-	-	-	-	-	-
	-	207 95	200	-	-	212 13	-	-	-	-	-	-
-	-	206 11 + 421 072	300	208 10	209 10	-	-	206 61 + 421 072	300	209 60	-	-
-	-	206 11 + 421 069	300	208 10	209 10	-	-	206 61 + 421 069	300	209 60	-	-
-	207 90	207 64	300	208 10	209 10	-	-	207 61	207 49	300	209 60	-
207 50	207 90	207 64	300	208 10	209 10	-	-	207 61	207 49	300	209 60	-
207 50	-	206 08 + 421 072	300	208 05	209 05	-	-	-	-	-	-	-
207 50	207 90	207 64	300	208 05	209 05	-	-	207 61	207 49	300	209 65	-
-	-	206 11 + 421 058	300	208 10	209 10	-	-	-	-	-	-	-
207 50	206 63	206 73	300	208 10	209 10	-	-	-	-	-	-	-
-	-	206 13 + 421 058	300	208 10	209 10	-	-	-	-	-	-	-
-	206 63	206 73	300	208 10	209 10	-	-	-	-	-	-	-
-	-	206 17	200	208 17	209 17	-	-	-	-	-	-	-
-	-	207 96	200	208 17	209 17	-	-	-	-	-	-	-
207 50	207 91	207 69	400	-	-	212 11	-	-	-	-	-	-
	207 91	207 69	400	-	-	212 08	-	-	-	-	-	-
207 50	206 69	206 83	400	-	-	212 11	-	-	-	-	-	-
	-	207 97	200	-	-	212 13	-	-	-	-	-	-




208 10

1/4 turn metal faceplate for DPX³ 160 and DPX³ 250, vertical mounting Height 300 mm



209 10

Screw metal faceplate for DPX³ 160 and DPX³ 250, vertical mounting Height 300 mm

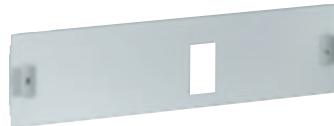

208 13

1/4 turn metal faceplate for DPX³ 160, horizontal mounting on adjustable fixing plate Height 150 mm



212 11

Lock metal faceplate for 1 to 3 DPX³ 160 or DPX³ 250 draw-out version, vertical mounting Height 400 mm

XL³ 4000
 equipment selection

Device	Version	Position	Configuration	Connection terminals	Rotary handle/ motor-driven
DPX 250	fixed	vertical	1 to 3 devices, no e.l.c.bs	front	-
			1 to 3 devices, no e.l.c.bs	front or rear	with or without
		horizontal	1 to 3 devices with e.l.c.bs	front	-
			1 to 3 devices with e.l.c.bs with or without downstream e.l.c.bs	front or rear	with or without
	plug-in	vertical	with or without downstream e.l.c.bs	front	-
			1 to 3 devices, no e.l.c.bs	front or rear	with or without
		horizontal	1 to 3 devices, with e.l.c.bs	front or rear	with or without
			with or without downstream e.l.c.bs	front or rear	with or without
	draw-out	vertical	no e.l.c.bs	front or rear	with or without rotary handle
			no e.l.c.bs	front or rear	motor-driven
			with e.l.c.bs	front or rear	with or without rotary handle
			with e.l.c.bs	front or rear	motor-driven
		horizontal	with or without downstream e.l.c.bs	front or rear	with or without rotary handle
			with or without e.l.c.bs	front or rear	motor-driven
		vertical	supply inverters	front or rear	-
			supply inverters	front or rear	motor-driven
DPX 630	fixed	vertical	1 to 3 devices, no e.l.c.bs	front	-
			1 to 3 devices, no e.l.c.bs	front or rear	with or without
			1 to 3 devices, with e.l.c.bs	front	-
			1 to 3 devices, with e.l.c.bs	front or rear	with or without
	plug-in	horizontal	with or without downstream e.l.c.bs	front	-
			with or without downstream e.l.c.bs	front or rear	with or without
		vertical	supply inverters	front or rear	with or without motor-driven
			1 to 2 devices, no e.l.c.bs	front or rear	with or without
	draw-out	vertical	1 to 2 devices, with e.l.c.bs	front or rear	with or without
			with e.l.c.bs	front or rear	with or without rotary handle
			no e.l.c.bs	front or rear	with or without rotary handle
			no e.l.c.bs	front or rear	motor-driven
		horizontal	with e.l.c.bs	front or rear	with or without rotary handle
			with or without downstream e.l.c.bs	front or rear	motor-driven
		vertical	no e.l.c.bs	front or rear	-
			no e.l.c.bs	front or rear	motor-driven
DPX 1600	fixed	vertical	no e.l.c.bs	front	-
			no e.l.c.bs	front	rotary handle or motor-driven
			no e.l.c.bs	rear	-
			no e.l.c.bs	rear	rotary handle or motor-driven
		horizontal	no e.l.c.bs	front	-
			no e.l.c.bs	front	motor-driven
			no e.l.c.bs	rear	motor-driven
			no e.l.c.bs	rear	rotary handle
	draw-out	horizontal	supply inverters	front or rear	-
			supply inverters	front or rear	motor-driven
		vertical	no e.l.c.bs	front	-
			no e.l.c.bs	front	rotary handle or motor-driven
		horizontal	no e.l.c.bs	front	-
			no e.l.c.bs	rear	rotary handle or motor-driven
			supply inverters	rear	-
			supply inverters	rear	motor-driven

(1) No height spacer if motor-driven

(2) 2 sets of spacers for adjustable plate


(3) NB: New catalogue numbers starting from June 2011, please contact us

	XL³ 4000 - 24 modules							XL³ 4000 - 36 modules				
	Spacer	Fixing device	Plate	Metal faceplate			Fixing device	Plate	Faceplate			
				Height (mm)	1/4 turn	Screw			Height (mm)	Screw	Lock	
	-	206 20	400	208 20	209 20	-	-	206 70	400	209 70	-	
207 50 ⁽¹⁾	207 20	207 75	400	208 20	209 20	-	207 70	207 75	400	209 70	-	
	-	206 22	600	208 22	209 22	-	-	206 72	600	209 72	-	
207 50 ⁽¹⁾	207 22	207 76	600	208 22	209 22	-	207 72	207 76	600	209 72	-	
	-	206 24	200	208 24	209 24	-	-	-	-	-	-	
	-	207 24	200	-	209 24	-	-	-	-	-	-	
207 50 ⁽¹⁾	-	206 74	400	-	209 74	-	-	-	-	-	-	
	207 21	207 77	400	-	-	212 20	-	-	-	-	-	
	207 23	207 78	600	-	-	212 22	-	-	-	-	-	
	-	207 27	200	-	-	212 24	-	-	-	-	-	
207 50	207 21	207 77	400	-	-	212 21	-	-	-	-	-	
207 50	207 21	207 77	400	-	-	212 02	-	-	-	-	-	
207 50	207 23	207 78	600	-	-	212 23	-	-	-	-	-	
207 50	207 23	207 78	600	-	-	212 03	-	-	-	-	-	
	-	207 26	300	-	-	212 26	-	-	-	-	-	
	-	207 26	300	-	-	212 27	-	-	-	-	-	
207 50	-	206 74	400	-	-	212 90	-	-	-	-	-	
207 50	-	206 74	400	-	-	212 91	-	-	-	-	-	
	-	206 20	400	208 20	209 20	-	-	206 70	400	209 70	-	
207 50 ⁽¹⁾	207 20	207 85	400	208 20	209 20	-	207 70	207 85	400	209 70	-	
	-	206 22	600	208 22	209 22	-	-	206 72	600	209 72	-	
207 50 ⁽¹⁾	207 22	207 86	600	208 22	209 22	-	207 72	207 86	600	209 72	-	
	-	206 23	300	208 23	209 21	-	-	-	-	-	-	
	-	207 93	300	-	209 23	-	-	-	-	-	-	
207 50 ⁽¹⁾	-	206 74	400	-	209 76	-	-	-	-	-	-	
	207 21	207 87	400	-	-	212 20	-	-	-	-	-	
	207 23	207 88	600	-	-	212 22	-	-	-	-	-	
	-	207 98	300	-	-	212 17	-	-	-	-	-	
207 50	207 21	207 87	400	-	-	212 21	-	-	-	-	-	
207 50	207 21	207 87	400	-	-	212 04	-	-	-	-	-	
207 50	207 23	207 88	600	-	-	212 23	-	-	-	-	-	
207 50	207 23	207 88	600	-	-	212 05	-	-	-	-	-	
	-	207 98	300	-	-	212 18	-	-	-	-	-	
	-	207 98	300	-	-	212 19	-	-	-	-	-	
207 50	-	206 76	400	-	-	212 94	-	-	-	-	-	
207 50	-	206 76	400	-	-	212 95	-	-	-	-	-	
	-	206 30 ⁽³⁾	400	208 30 ⁽³⁾	209 30 ⁽³⁾	-	-	206 80 ⁽³⁾	400	209 80 ⁽³⁾	-	
207 50 ⁽¹⁾⁽²⁾	-	207 30 ⁽³⁾	400	-	209 32 ⁽³⁾	-	-	-	-	-	-	
207 50 ⁽¹⁾⁽²⁾	-	207 32 ⁽³⁾	400	208 30 ⁽³⁾	209 30 ⁽³⁾	-	-	207 82 ⁽³⁾	400	209 80 ⁽³⁾	-	
207 50 ⁽¹⁾⁽²⁾	-	207 32 ⁽³⁾	400	-	209 32 ⁽³⁾	-	-	-	-	-	-	
	-	206 30	400	208 34	209 34	-	-	206 80	400	209 84	-	
	-	206 30	400	-	209 36	-	-	-	-	-	-	
	-	206 30	400	-	209 35	-	-	-	-	-	-	
207 50 ⁽¹⁾⁽²⁾	-	207 36	400	208 34	209 34	-	-	-	-	-	-	
207 50 ⁽¹⁾⁽²⁾	-	207 36	400	-	209 35	-	-	-	-	-	-	
	-	206 86	800	-	209 86	-	-	-	-	-	-	
	-	206 86	800	-	209 87	-	-	-	-	-	-	
	-	207 31	400	-	-	212 31	-	-	-	-	-	
	-	207 31	400	-	-	212 32	-	-	-	-	-	
	-	207 35	400	-	-	212 34	-	-	-	-	-	
	-	207 35	400	-	-	212 35	-	-	-	-	-	
	-	206 87	800	-	-	212 36	-	-	-	-	-	
	-	206 87	800	-	-	212 37	-	-	-	-	-	


DPX³ 160 thermal magnetic

Dimensions

Fixed version

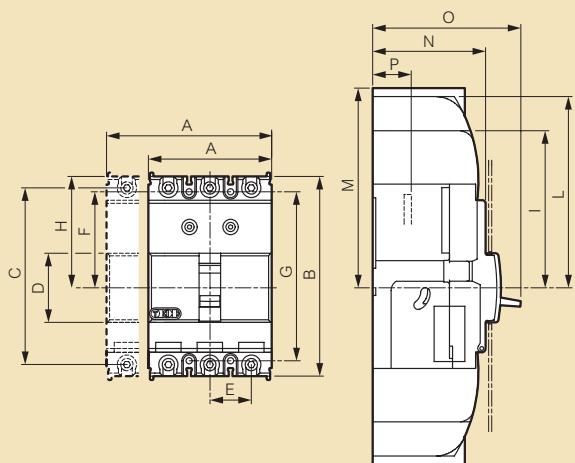


Fixed version with earth leakage module

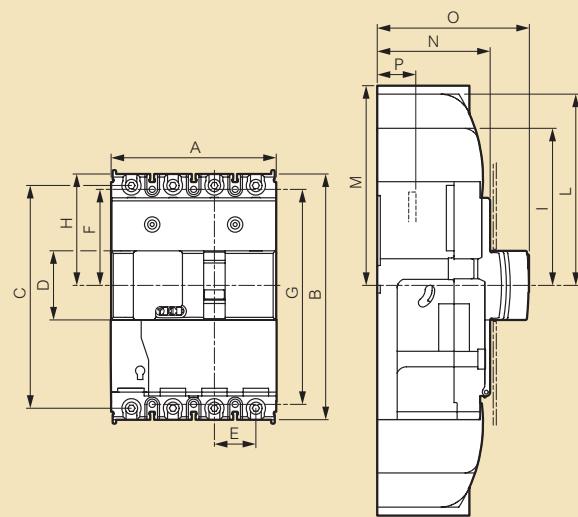


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	81	130	115	45	27	62,5	110	72,5	102,5	125	-	74	100	18
4P	108	130	115	45	27	62,5	110	72,5	102,5	125	-	74	100	18
e.l.c.b.s	108	160	145	45	27	62,5	140	72,5	102,5	125	-	74	100	18

Plug-in version

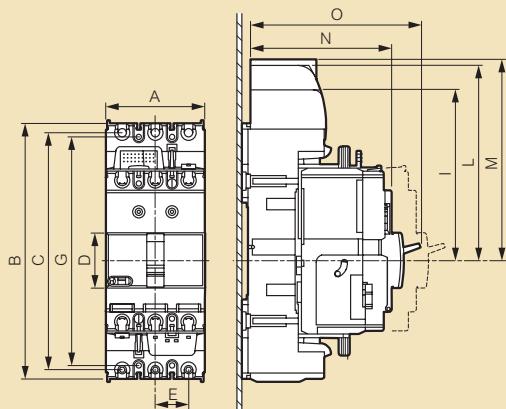

Plug-in version with earth leakage module

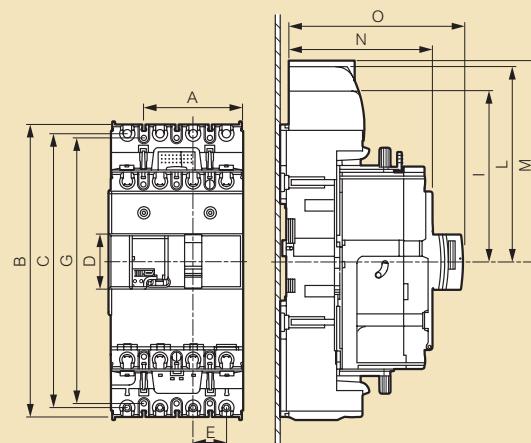


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	81	208	193	45	27	100,5	186	111,5	141,5	164	-	122	148	-
4P	108	238	223	45	27	100,5	216	111,5	141,5	164	-	122	148	-
e.l.c.b.s	108	230	223	45	27	100,5	216	111,5	141,5	164	-	122	148	-


DPX³ 250 thermal magnetic and electronic release

Dimensions

Fixed version

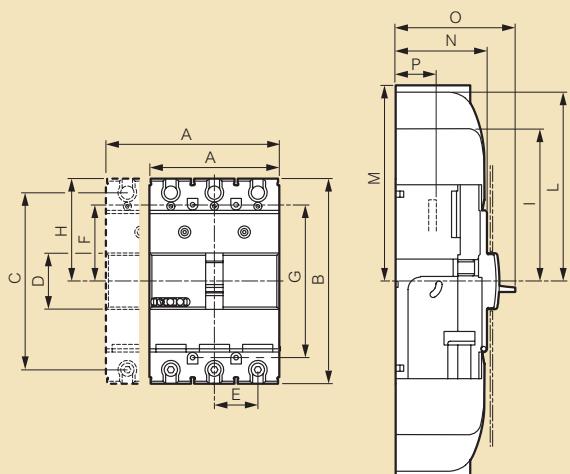


Fixed version with earth leakage module

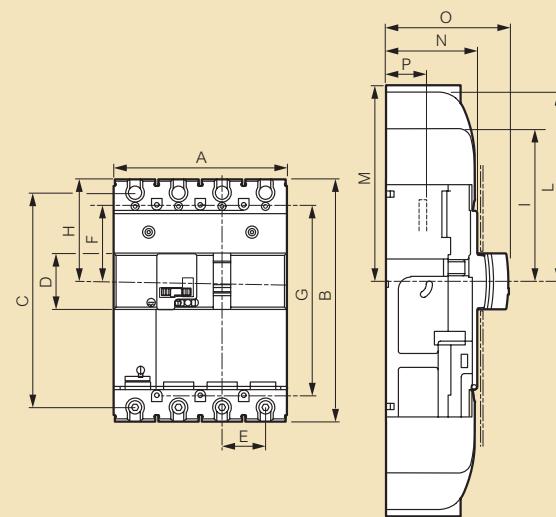


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	105	165	142,5	45	35	61,5	123	82,5	112,5	150	-	74	100	18
4P	140	165	142,5	45	35	61,5	123	82,5	112,5	150	-	74	100	18
e.l.c.b.s	140	195	172,5	45	35	61,5	153	82,5	112,5	150	-	74	100	18

Plug-in version

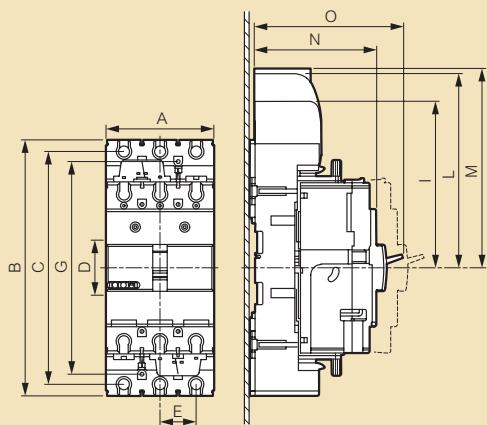

Plug-in version with earth leakage module

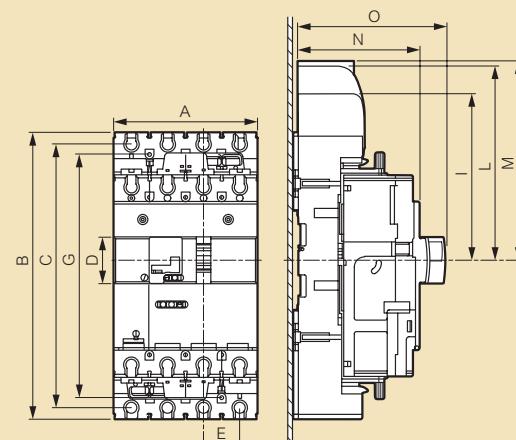


	A	B	C	D	E	F	G	H	I	L	M	N	P
3P	105	248	225,5	45	35	103	206	150	180	217,5	-	122	148
4P	140	278	225,5	45	35	103	236	150	180	217,5	-	122	148
e.l.c.b.s	140	278	225,5	45	35	103	236	150	180	217,5	-	122	148


DPX³ 160/250 accessories

Dimensions

Direct rotary handles Cat.Nos 421 000/001/002/003

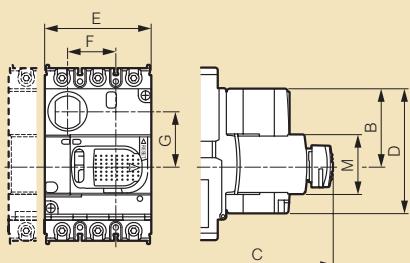


Vari-depth rotary handles Cat.Nos 421 004/005

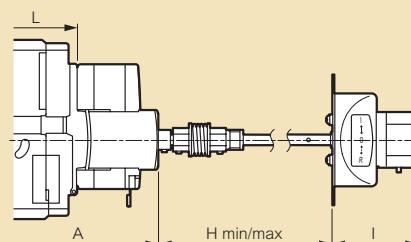


	A	B	C	D	E	F	G	H min	H max	I	L	M
160	122	57	155	94	80,5	36,5	41,7	132	361	62	74	45
160 with e.l.c.bs	122	57	155	94	93	36,5	41,7	132	361	62	74	45
250	122	57	155	94	80,5	40,5	41,7	132	361	62	74	45
250 with e.l.c.bs	122	57	155	94	93	40,5	41,7	132	361	62	74	45
250 electronic release	122	57	155	94	93	40,5	41,7	132	361	62	74	45
250 electronic release with e.l.c.bs	122	57	155	94	93	40,5	41,7	132	361	62	74	45

Front motor-driven handle Cat.No 421 061

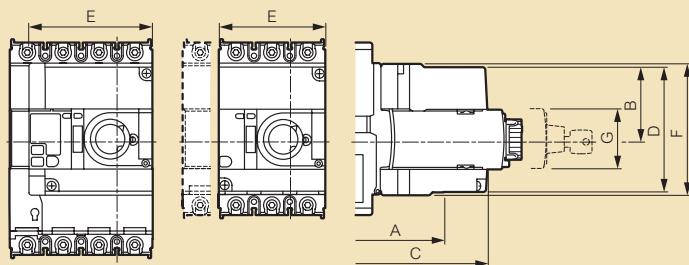


	A	B	C	D	E	F	G	H
160	125	54,5	154	94	80,5	99	45	74
160 with e.l.c.bs	125	54,5	154	94	93	99	45	74
250	125	54,5	154	94	80,5	99	45	74
250 with e.l.c.bs	125	54,5	154	94	93	99	45	74
250 electronic release	125	54,5	154	94	93	99	45	74
250 electronic release with e.l.c.bs	125	54,5	154	94	93	99	45	74

Rear terminals Cat.Nos 421 036/037/038/039

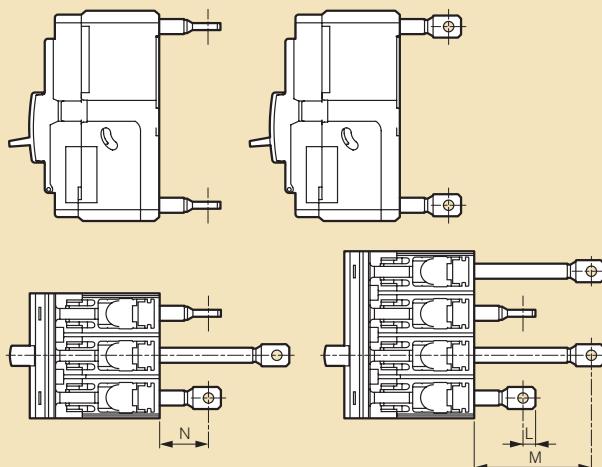

Incoming spreaders Cat.Nos 421 032/033/034/035

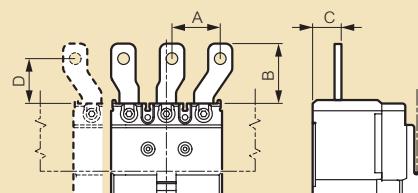


	A	B	C	D
160	35	41	23	33
160 with e.l.c.bs	35	41	23	33
250	48,5	55	23	39
250 with e.l.c.bs	48,5	55	23	39


DPX™ 250

■ Dimensions


Fixed version, front terminals

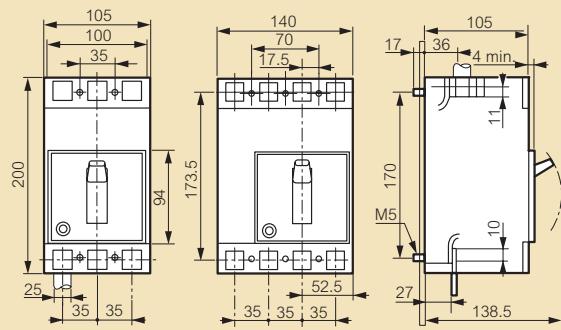


Fixed version with earth leakage module mounted underneath⁽¹⁾

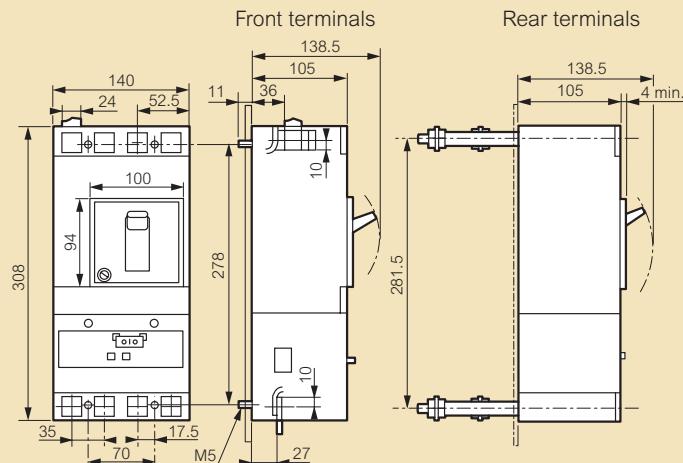


Plug-in version, front terminals

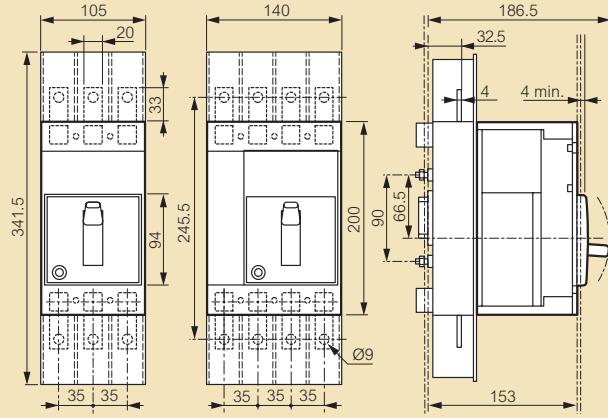


Plug-in version, rear terminals

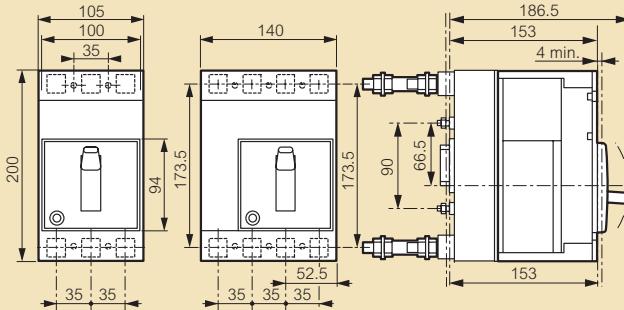


Draw-out version, front terminals

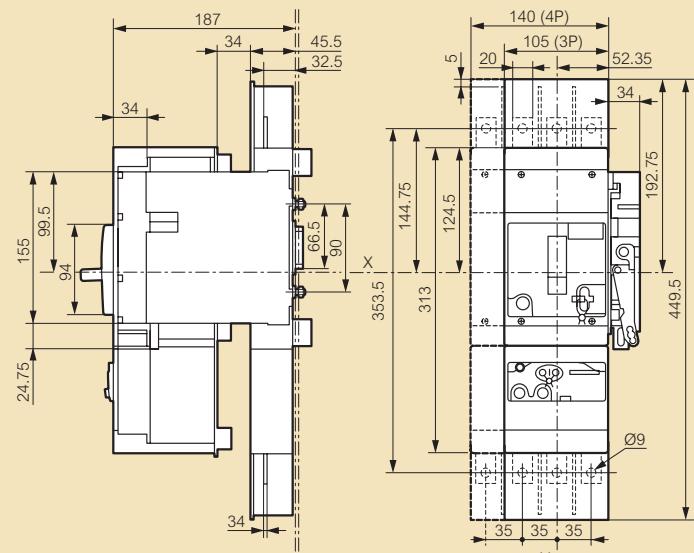

Draw-out version, rear terminals

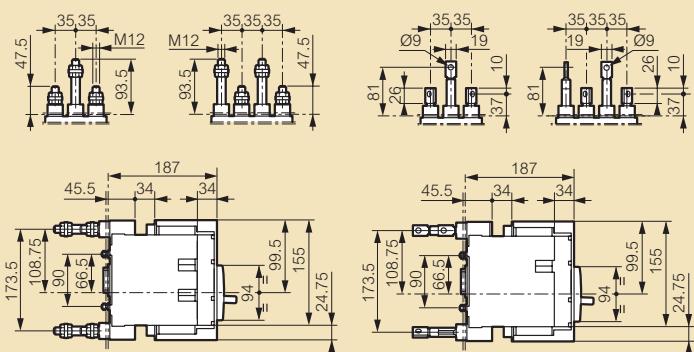

Rotary handle-direct on DPX

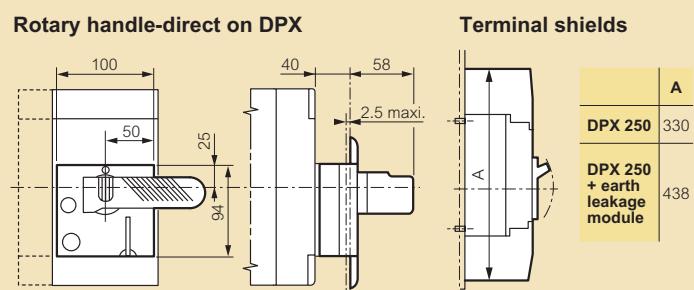


Terminal shields






A	DPX 250	330
	DPX 250 + earth leakage module	438

Rotary handle-vari-depth on door




Mounting with flexible seal

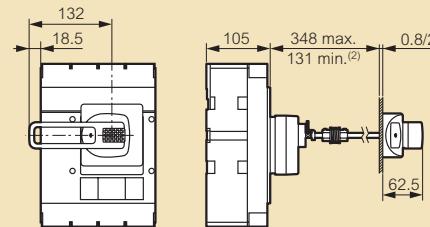


(1) Dimensions of 3-pole earth leakage modules are the same as 4-pole earth leakage modules
(2) 75 mm without mechanical system

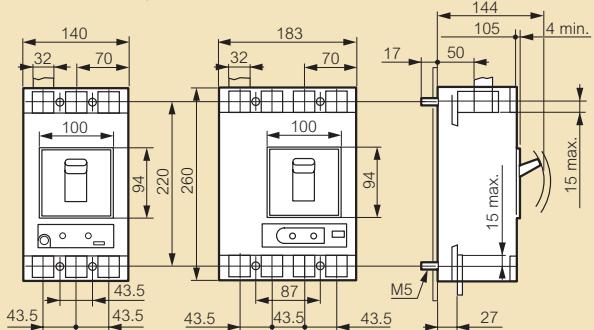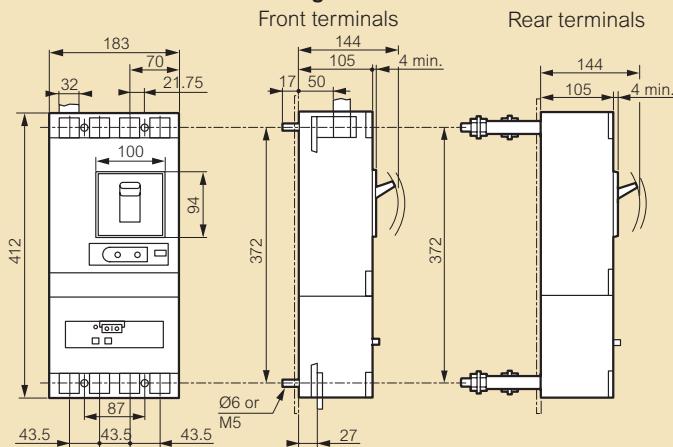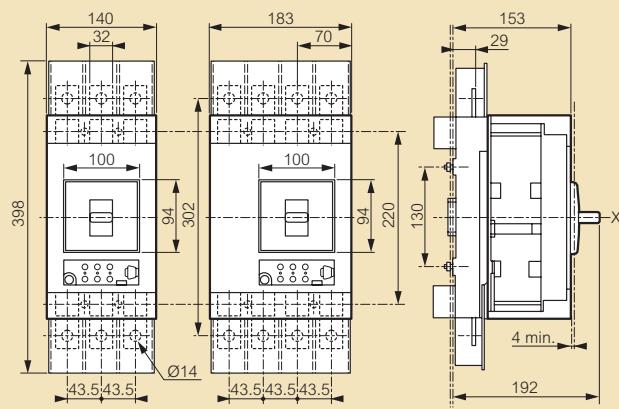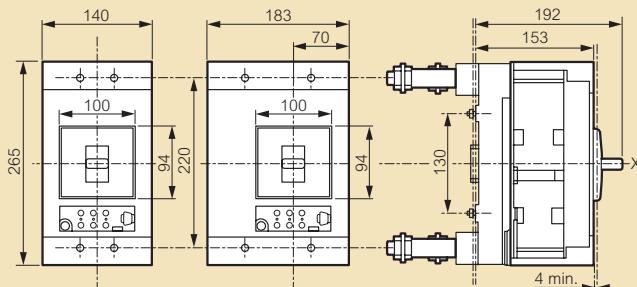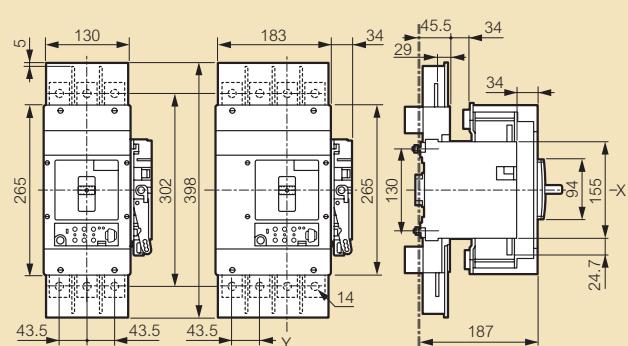■ Dimensions
Fixed version, front terminals

Fixed version with earth leakage module mounted underneath

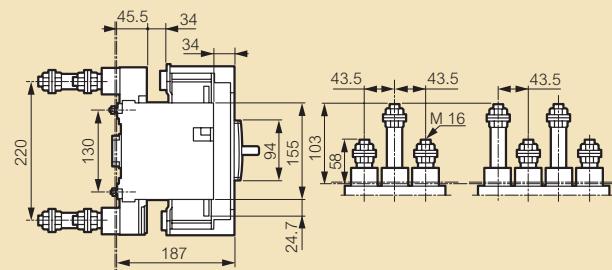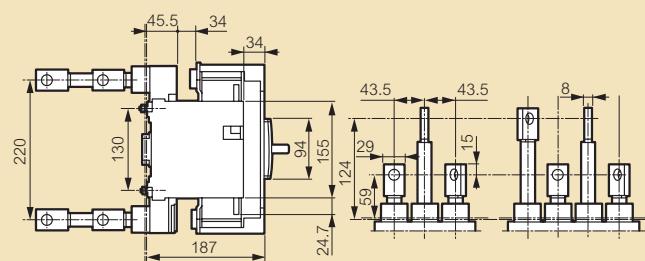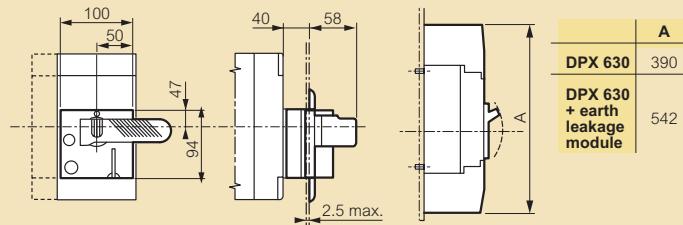Plug-in version, front terminals

Plug-in version, rear terminals

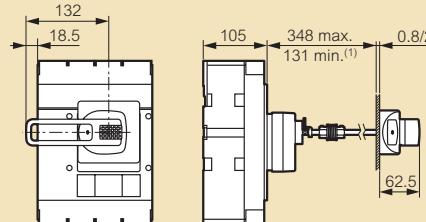Draw-out version, front terminals

Draw-out version, rear terminals

Rear terminal with threaded rod


Flat rear terminal

Rotary handle-direct on DPX
Terminal shields

Rotary handle-vari-depth handle on door

Mounting with flexible seal




(1) 75 mm without mechanical system


DPX™ 1600

■ Dimensions


Fixed version, front terminals

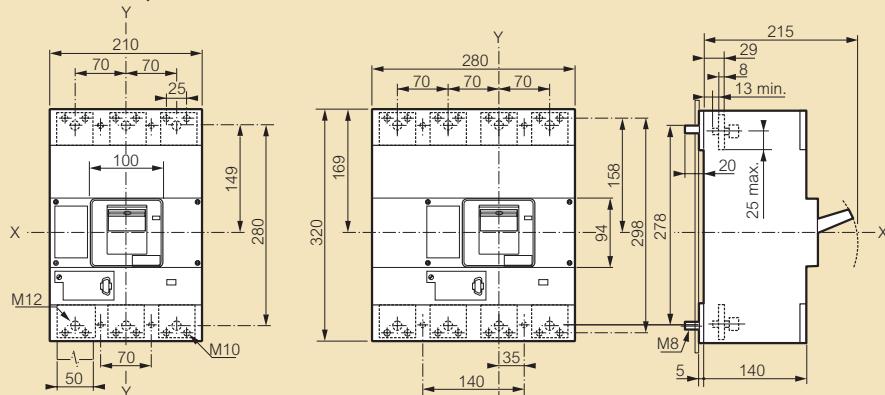


Fixed version, rear terminals

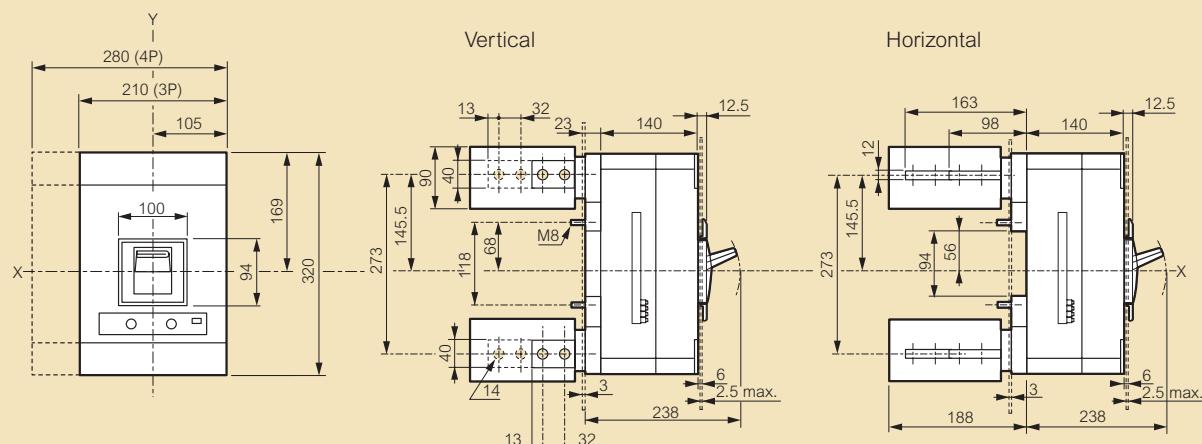

Draw-out version, rear terminals

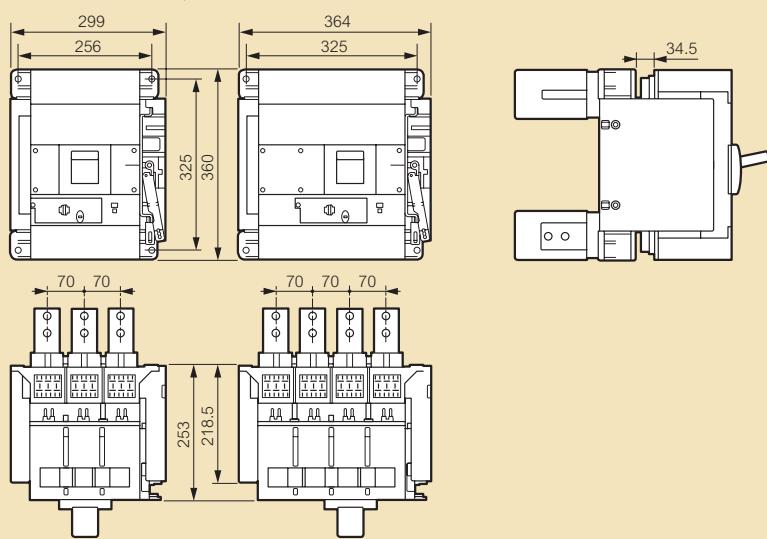


Rotary handle-direct on DPX

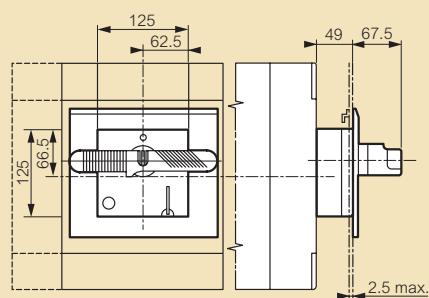


Horizontal

Terminal shields

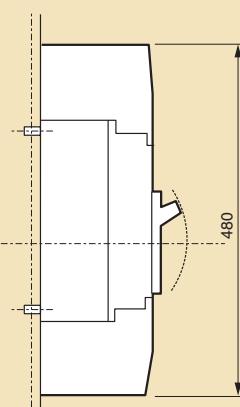

Rotary handle-vari-depth handle on door


Mounting with flexible seal

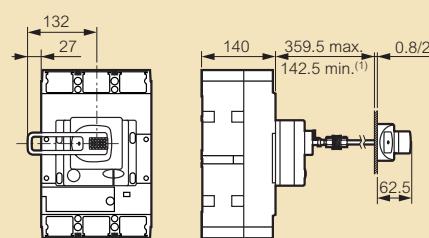

(1) 75 mm without mechanical system


DPX³ 160/250

■ DPX³ 160 thermal-magnetic Tripping curve

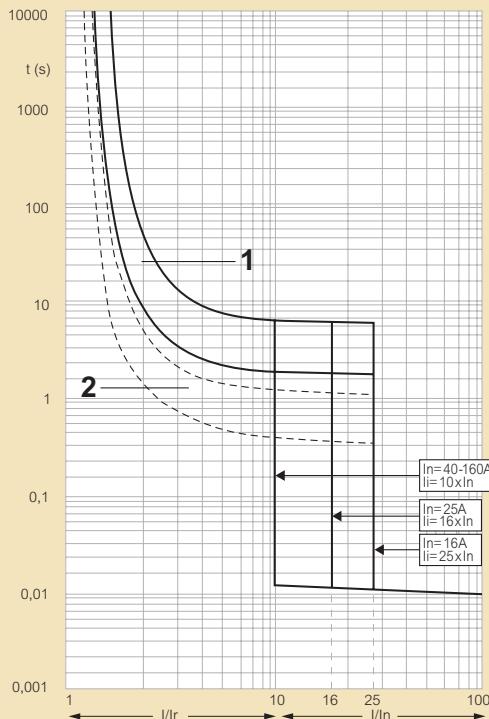


t: time
 I: rated current
 Ir: setting current
 Curve n°1: characteristic with cold start
 Curve n°2: characteristic with hot start

■ DPX³ 250 thermal-magnetic Tripping curves

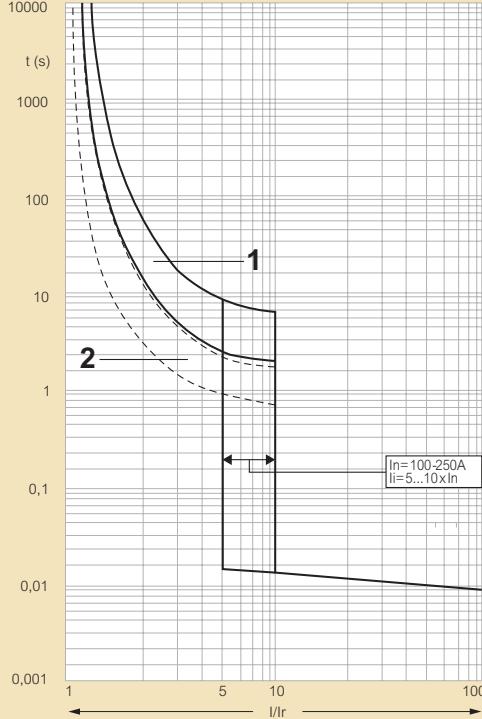


t: time
 I: rated current
 Ir: setting current
 Curve n°1: characteristic with cold start
 Curve n°2: characteristic with hot start

■ DPX³ 160 thermal-magnetic with integrated e.l.c.b.s Tripping curves

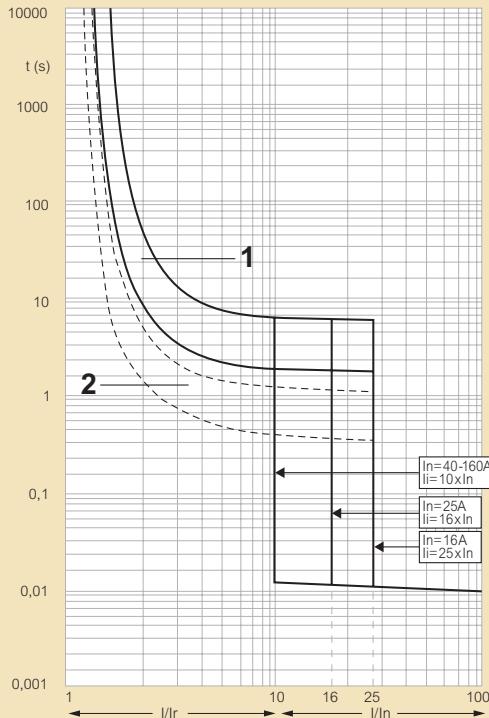

t: time
 I: rated current
 Ir: setting current
 Curve n°1: characteristic with cold start
 Curve n°2: characteristic with hot start

■ DPX³ 250 thermal-magnetic with integrated e.l.c.b.s

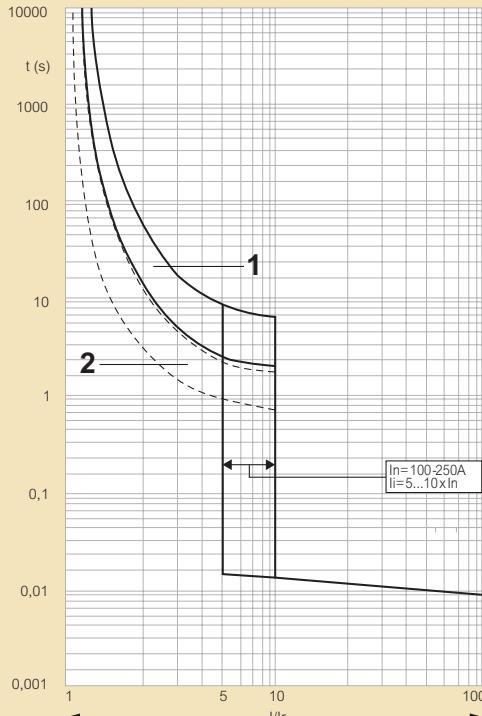


t: time
 I: rated current
 Ir: setting current


DPX³ 160/250 (continued)

DPXTM reading DPX characteristic curves and adjustment ranges

■ DPX³ 250 electronic release Tripping curves

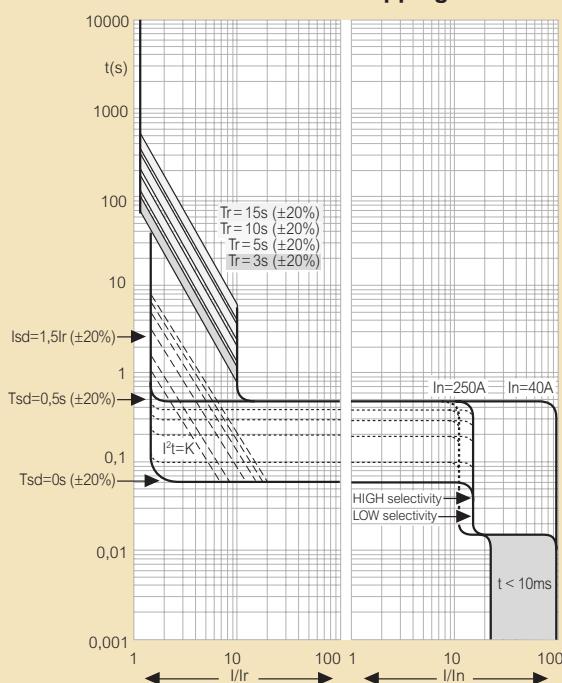

■ Tripping curve for a DPX thermal-magnetic trip

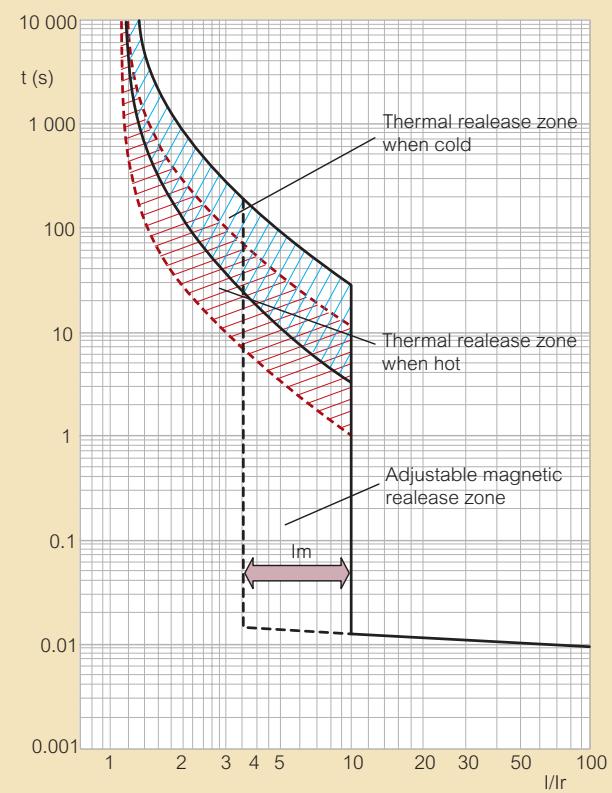

■ Adjustment for thermal-magnetic DPX³

Setting	DPX ³ thermal magnetic	DPX ³ with integrated e.l.c.b.s
Ir overload trip threshold (thermal)	0.4 to 1 In	0.4 to 1 In
Im short-circuit trip threshold (magnetic)	fixed: 10 In ⁽¹⁾	fixed: 10 In ⁽¹⁾
I _{Δn} (A)	-	0.03 - 0.03 - 1 - 3
Δt (s)	-	0 - 0.3 - 1 - 3

(↑ 400 A for DPX³ 160 In 16 A and 25 A

I: actual current

Ir: thermal protection against overloads (setting: Ir = x In)

Im: magnetic protection against short-circuits (setting: Im = x In or Im = x Ir)

As the abscissa of the curves represents the ratio I/Ir, modifying the setting of Ir will not change the graphical representation of the thermal trip. However, the magnetic setting can be read directly (between 3.5 and 10 in the example).


■ Adjustment for DPX³ electronic release

Setting	DPX ³	DPX ³ with integrated e.l.c.b.s
Ir overload trip threshold (long delay)	0.4 to 1 In	
Tr long delay trip time	3 - 5 - 10 - 15s	
Im short-circuit trip threshold (short delay)	1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 x Ir	
Tm short delay trip time	0.01 - 0.1 - 0.2 - 0.3 - 0.4 - 0.5s	
Ig	(0.2 - 0.3 - 0.4 - 0.5 - 0.6 - 0.7 - 0.8 - 1 - OFF) x In	
Tg	0.1 - 0.2 - 0.5 - 1s	

DPX™


reading DPX characteristic curves and adjustment ranges

■ Tripping curve for a DPX electronic release S1, adjustable Ir and lsd

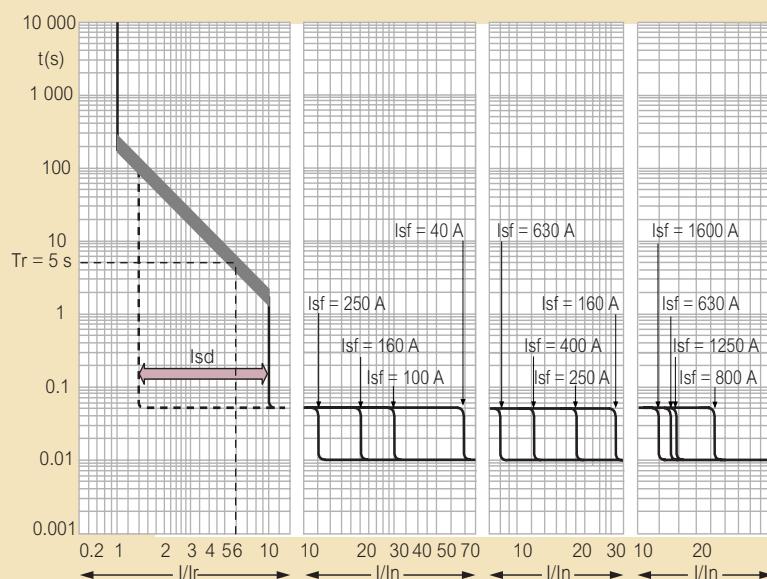

I: actual current
 Ir: long delay protection against overloads (setting: $Ir = x \ln$)
 lsd: long delay protection operation time (fixed value: 5 s at 6 Ir)
 lsd: short delay protection against short-circuits (setting: $Im = x Ir$, between 1.5 and 10 Ir in the example)
 Tsd: short delay protection operation time (fixed value: 0.05 s)
 If: fixed threshold instantaneous protection (4 to 20 kA depending on model)

■ Tripping curve for a DPX electronic release S2, adjustable Ir, lsd, Tr and Tsd

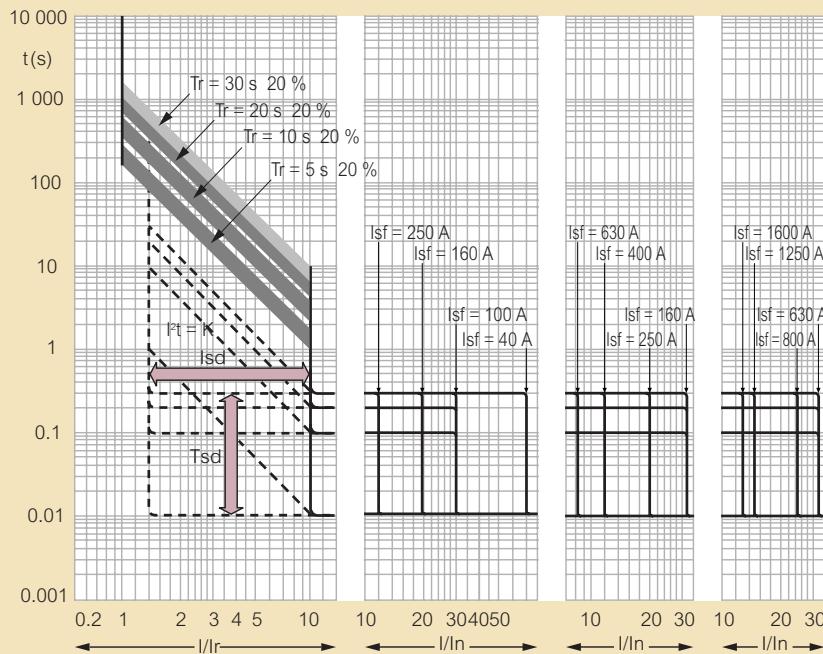

I: actual current
 Ir: long delay protection against overloads (setting: $Ir = x \ln$)
 Tr: long delay protection operation time (fixed value: 5 to 30 s)
 lsd: short delay protection against short-circuits (setting: $Im = x Ir$, between 1.5 and 10 Ir in the example)
 Tsd: short delay protection operation time (setting: 0 to 0.3 s)
 If: fixed threshold instantaneous protection (4 to 20 kA depending on model)

■ Adjustment for thermal-magnetic DPX

Setting	DPX 250	DPX 630	DPX 1600
Ir overload trip threshold (thermal)	0.64 to 1 ln	0.8 to 1 ln	0.8 to 1 ln
Im short-circuit trip threshold (magnetic)	3.5 to 10 ln	5 to 10 ln	5 to 10 ln

■ Adjustment for DPX electronic release

Setting	DPX 250 / 630 / 1600 S1	DPX 250 / 630 / 1600 S2
Ir overload trip threshold (long delay)	$0.4 - 0.5 - 0.6 - 0.7 - 0.8 - 0.9 - 0.95 - 1) \times \ln$	
Tr long delay trip time	fixed: 5 s (to 6 Ir)	5 - 10 - 20 - 30 s (to 6 Ir)
Im short-circuit trip threshold (short delay)	$(1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10) \times I f^1$	
Tm Short delay trip time	fixed: 0.05 s	0 - 0.1 - 0.2 - 0.3 s

(1) $7.9 Ir$ for DPX 630 ln 630 A



**World Headquarters
and International Department**

128, av. du Maréchal-de-Lattre-de Tassigny
87045 Limoges Cedex - France

: + 33 (0) 5 55 06 87 87
Fax : + 33 (0) 5 55 06 74 55
www.legrandgroup.com