



Requires the installation of a:

Gateway module





/
OR
/
Any kind of
"with Netatmo"
gateway

Composition



Connected Contactor

Control wiring authorized



2,4-2,4835Ghz <100 mW	Silent <10dB	Planning	Measure	4800W	1200VA	EV plug remote	3840W	650W	3000W

-5°C +45°C	100-240V~ 50/60Hz	20A MAX	Connected shedding compatible



Safety instructions


This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All **Legrand** products must be opened and repaired exclusively by personnel trained and approved by **Legrand**. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only **Legrand** brand accessories.

1 Preparation, connection



OFF

Turn off the power at
general circuit breaker






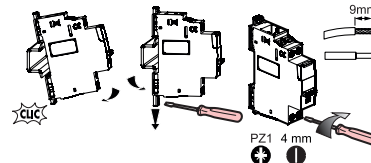


C1, C2:
MAX 2x 1.5mm ² 2.5mm ²
N, L, Load:
MAX 2x 2.5mm ² 6mm ²
C1,C2, N, L, Load:
MIN : 0.8Nm MAX : 1.4Nm

Wiring examples

Thanks to its control circuit with integrated power and protection, you no longer need to install a circuit breaker 2A to protect the control circuit if you wire a contact between C1 and C2.


For the protection of the Connected Contactor, it is recommended to use a circuit breaker or a gG fuse with current rating ≤ 20A. If conditions allow, the existing electrical protections in the electrical panel can be reused for this purpose.



* : Non-functional consumption measurement when controlling a single line or a three lines power contactor by a connected contactor.

— N (neutral) = blue
— L (Line) = everything but blue and green/yellow
— Line after contact = usually purple, orange...

② Add the **Contactor** in a connected installation

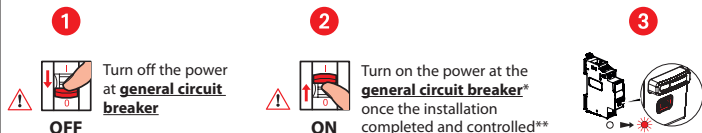


* In order to restart all connected products at the same time.

** After wiring the installation, refit the front plate so that no active live part is accessible.

③ Finalize the installation in the Legrand Home + Control app


Download the Home + Control App and follow the instructions for adding the connected product in your setup.



You also have the option of controlling your installation via a voice assistant and can customize your scenarios via the Home + Control App.



Use by manual control and status LED



Automatic Mode




ON/OFF Mode



Reset a Connected Contactor to remove it from a connected installation

Press the configuration button of the Connected Contactor (> 5 seconds) until the configuration indicator lights up in fixed red. It is no longer associated with the gateway present in the installation.



www.legrand.com/ecatalogue/

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

UE SIMPLIFIED DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio equipment listed on this instruction sheet are compliant to the directive 2014/53/UE.

The full text of the UE declaration of conformity is available at the following website:

www.legrand.com/ecatalogue