


# Lichtsignalisatie

## ■ Geluidstabel voor ref. 041396/97/98


N°	Weergave	Frequentie (Hz)	Cycli
0		600 – 700	0,5s/0,5s
1		440 – 560	565s/565s
2		800 – 970	0,25s/0,25s
3		800 – 970	0,8s/0,8s
4		1000 – 2000	1s/1s
5		420	0,625s ON/0,625s OFF
6		660	0,15s ON/0,15s OFF
7		660	1,8s ON/1,8s OFF
8		660	0,5s ON/0,5s OFF
9		720	0,7s ON/0,3s OFF
10		750	0,33s ON/0,5s OFF
11		800	0,25s ON/1s OFF
12		970 – 800	0,35s/0,35s/0,35s OFF X 3 1,5s OFF
13		970	0,5s ON/0,5s OFF X 3 1,5s OFF
14		970	0,25s ON/0,25s OFF
15		2850	1s ON/1s OFF
16		2850	0,25s ON/0,25s OFF
17		300	
18		660	
19		750	
20		2850	
21		500 – 1200	3,5s ON/0,5s OFF
22		500 – 1200	0,5s ON/0,5s OFF X 3 1,5s OFF
23		800 – 970	0,5s ON/0,5s OFF X 3 1,5s OFF
24		1000 – 1700	Cyclus 0,25s
25		1000 – 1700	Cyclus 0,8s
26		1000 – 3000	Cyclus 0,64s
27		1000 – 3000	Cyclus 0,32s
28		-	Willekeurig
29		-	Willekeurig
30		700 – 600	0,35s/0,7s/0,5s OFF
31		554 – 440	0,35s/0,7s/0,5s OFF
32		480 – 610	0,5s/0,5s
33		970 – 630	0,5s/0,5s
34		554 – 440	0,1s/0,4s
35		440 – 554	0,5s/0,5s
36		510 – 610	0,5s/0,5s
37		510 – 610	1s/1s
38		600 – 700	1s/1s
39		550 – 1000	0,5s/0,5s
40		550 – 1000	1s/1s
41		800 – 1000	0,5s/0,5s
42		800 – 1000	1s/1s
43		1000 – 2000	0,5s/0,5s
44		2400 – 2850	0,265s/0,265s
45		2400 – 2850	0,465s/0,465s
46		640 – 970	0,5s/0,5s
47		490 – 610	0,25s/0,25s
48		610	-
49		500	-
50		970	-
51		490	0,5s ON/1s OFF
52		544	0,625s ON/0,625s OFF
53		660	6,5s ON/13s OFF
54		970	1s ON/1s OFF
55		2850	0,5s ON/0,5s OFF X 3 1,5s OFF
56		500 – 1200	Cyclus 3,75s/0,25s OFF
57		1400 – 1600	Cyclus 1,5s
58		800 – 970	Cyclus 1,5s
59		1200 – 500	Cyclus 1s
60		-	Willekeurig
61		500 – 1500	Cyclus 0,64s
62		500 – 1500	Cyclus 0,32s
63		554 – 440	0,35s/0,7s/0,5s OFF

## ■ Basisafmetingen


Ref. 041380

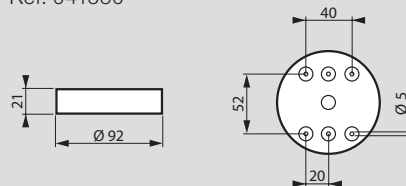

Ref. 041381/82/83

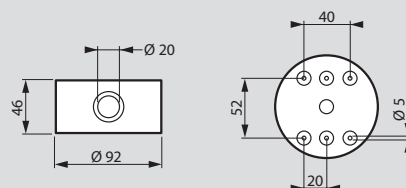

Ref. 041375/84

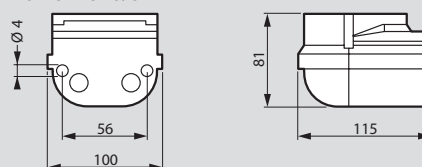

## ■ Verbruikstabel

041386		085 cd	041386/87/88/90/91
041387		640 cd	12 V - 250 mA
041388		680 cd	24 V - 155 mA
041389		215 cd	40 V - 200 mA
		215 cd	120 V - 70 mA
041390		365 cd	240 V - 55 mA
		5 cd	041389
041391		7 cd	12 V - 100 mA
			24 V - 75 mA
			40 V - 175 mA
			120 V - 40 mA
			240 V - 30 mA
041392		7 cd	+ 041380/75/84 : IP 44
			+ 041381/82/83 : IP 65
			12 V - 270 mA
			24 V - 205 mA
			40 V - 125 mA
041393		5 cd	120 V - 65 mA
			240 V - 40 mA
			+ 041380/75/84 : IP 44
			+ 041381/82/83 : IP 65
041394		80 cd	12 V - 210 mA
041395		50 cd	24 V - 165 mA
			40 V - 155 mA
			120 V - 60 mA
			240 V - 40 mA
041396		3 cd	12 V - 315 mA
			24 V - 280 mA
041397		5 cd	54 - 102 dB
			40 V - 110 mA
			80 V - 75 mA
			240 V - 50 mA
041398		54 - 102 dB	+ 041380/75/84 : IP 44
			+ 041381/82/83 : IP 65
			12 V - 280 mA
			24 V - 185 mA
			40 V - 70 mA
041398		54 - 102 dB	80 V - 55 mA
			240 V - 35 mA
			+ 041380/75/84 : IP 44
			+ 041381/82/83 : IP 65

