


2 gang connected switch with neutral
8 636 32 - 8 637 32 - 8 638 32 - 8 639 32




Requires you to buy and install the Niloé Step with Netatmo connected starter pack first.

Control Module


Gateway Power Outlet and Home/Away wireless control



OR



Pack contents



2 gang connected switch with neutral

Characteristics

This switch works with the following loads :

+45°C +5°C 110-240 V~ 50/60 Hz	2 x 1,5 mm ²		LED Dimmable 		+ + 	^(**) + +
240 V~	Maxi.	250 W	(*) 50 VA	50 VA	250 VA	250 VA
110 V~	Maxi.	125 W	(*) 25 VA	25 VA	125 VA	125 VA

(*) or 10 bulbs max. For comfortable lighting, we recommend using bulbs of the same type and manufacturer.

(**) Ferromagnetic transformers must be loaded to more than 60% of their nominal power. When calculating the permissible power, the efficiency of ferromagnetic transformers must be taken into account. It is necessary to connect a load before programming and using the product.


⚠ Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All **Legrand** products must be opened and repaired exclusively by personnel trained and approved by **Legrand**. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only **Legrand** brand accessories.

LE13862AA


Before starting : wiring precautions

If you plan to install two-way light switches, read the following precautions:
To control 1 light with 2 or more points of control, use only the following products :




x 1
2 gang connected switch
with neutral

AND



x 1
or several

AND/OR



x 1
or several

Wireless lighting controls (not included in this pack).
Up to 20 maximum



Do not use: two 2gang connected switches to control the same lighting point.

1 Necessary safety precautions

1



Switch off the power
at the main circuit
breaker


2



Make sure that the power is off before continuing with the installation.


2 Install the connected 2 gang switch

1




Remove the existing switch

3



2 Wire the connected 2G switch

— N (neutral) = blue
— L (Live) = all except blue
and green/yellow
— ⊕ (earth) = green/yellow


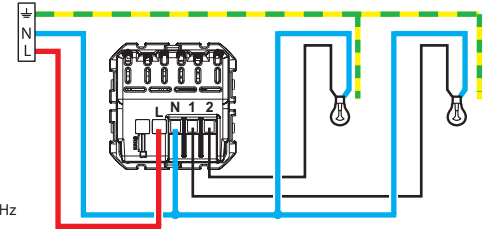


Frequency bands: 2.4 - 2.4835 GHz
Power level: < 100 mW

Tip if replacing an existing 2-way switch

The travellers 1 and 2 of the old switch must be wired together in terminal 1 or 2 of the new connected switch

Old flush mounted switch replaced by a wireless lighting control

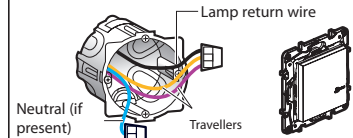

Use a connector to connect all 3 wires together (travellers 1 and 2 and lamp return wire). Use a separate connector to insulate the neutral wire

③ **To add a connected product to your connected installation, you should follow the instructions:**

in the **Legrand Home + Control application (Settings/Add a new product section)**

or consult the user manual on **legrand.com**



www.legrand.com

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

SIMPLIFIED **EU** DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website :

www.legrand.com/ecatalogue