

CONTENTS	Page
1. Use	1
2. Technical characteristics	1
3. Dimensions	2
4. Connection	2
5. Installation	4
6. Removal	4
7. Operation	5
8. Settings	6
9. Performance	7
10. Care	7
11. Standards and approvals	7
12. Troubleshooting	7

1. USE


This device is used to control a light source automatically by detecting movement in a monitored area.
 Motion sensor with detection angle of 2 x 12 m.
 Detection type: infrared (PIR)
 Mounting type: ceiling

2. TECHNICAL CHARACTERISTICS

Voltage: 100 - 240 V~
 Frequency: 50/60 Hz
 No-load power consumption: 0.2 W
 Output via normally open contact connected to the phase
 Wiring: 2 x 2.5 mm²
 Drilling diameter: 65 mm without flush-mounting box
 68 mm with flush-mounting box
 Weight: 114 g
 Impact resistance: IK04
 Penetration by solid and liquid matter: IP41 installed product.
 Usage temperature: - 5°C to + 45°C
 Storage temperature: - 20°C to + 70°C

2. TECHNICAL CHARACTERISTICS (continued)

Cover removed

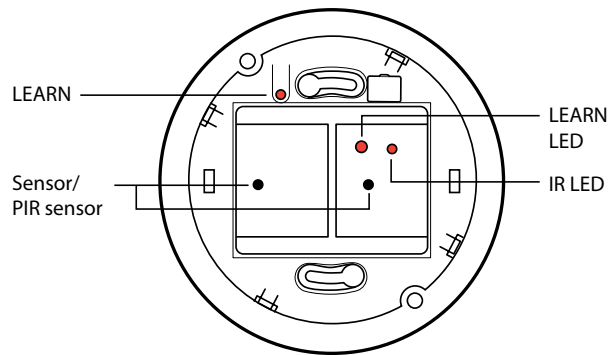


①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩				
230 V~	2000 W	8.5 A	1000 VA	4.3 A	10x(2x36 W)	4.3 A	500 VA	2.1 A	1000 VA	4.3 A	500 VA	2.1 A	I max. ≤ 2A
110 V~	1000 W		500 VA		5x(2x36 W)		250 VA		500 VA		250 VA		

- 1 - Halogen bulb
- 2 - ELV halogen bulb with separate electronic ballast
- 3 - ELV halogen bulb with separate ferromagnetic ballast
- 4 - Fluorescent tube with separate ferromagnetic ballast
- 5 - ELV fluorescent tube with separate electronic ballast


- 6 - Compact fluorescent bulb with built-in electronic ballast
- 7 - Compact fluorescent bulb with separate ferromagnetic ballast
- 8 - Compact fluorescent bulb with separate electronic ballast
- 9 - LED bulb
- 10 - Contactor

3. DIMENSIONS

Without protective cover

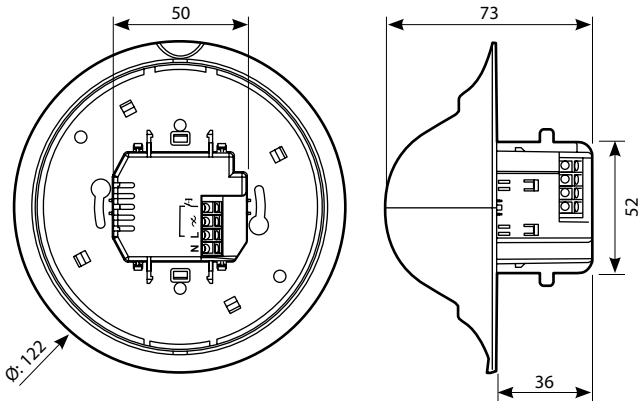


With protective cover

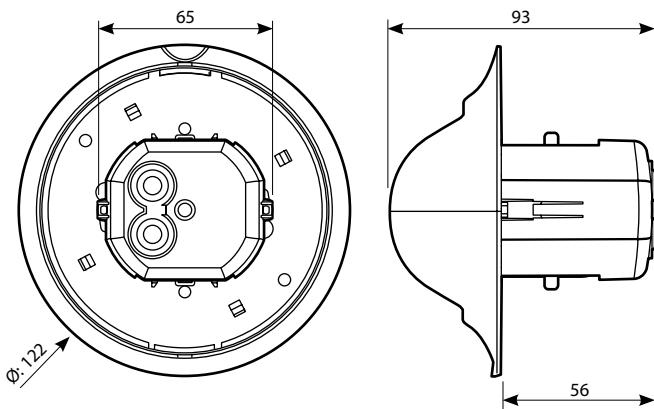


4. CONNECTION

Number of terminals: 4
 Type of terminals: automatic
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 8 mm


■ **4.1 Wiring with auxiliary control:**

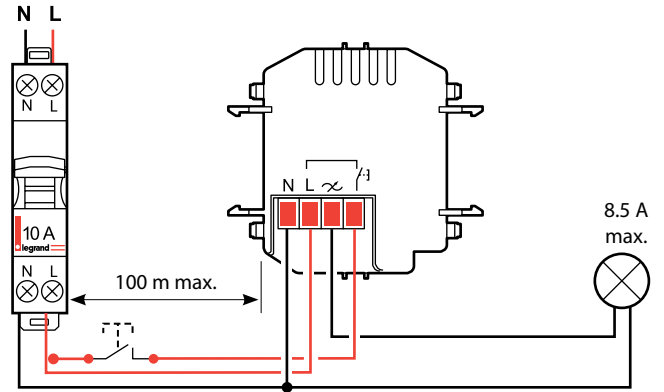

■ **4.2 Wiring without auxiliary control: Auto on/Auto off**

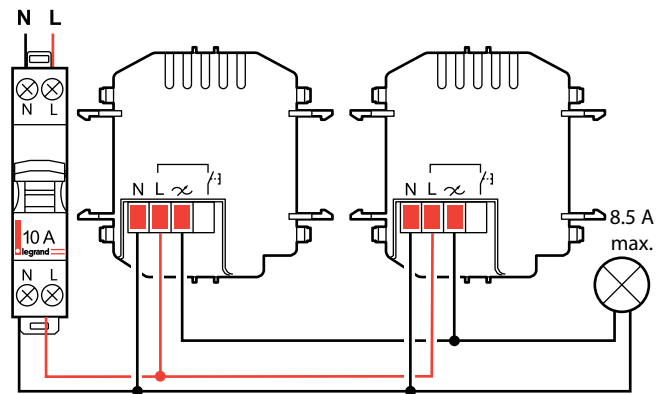


Wiring

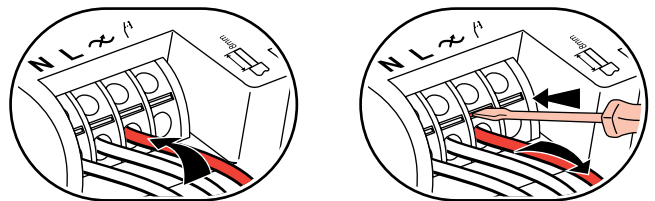


4. CONNECTION (continued)



■ 4.3 Wiring for several loads connected in parallel

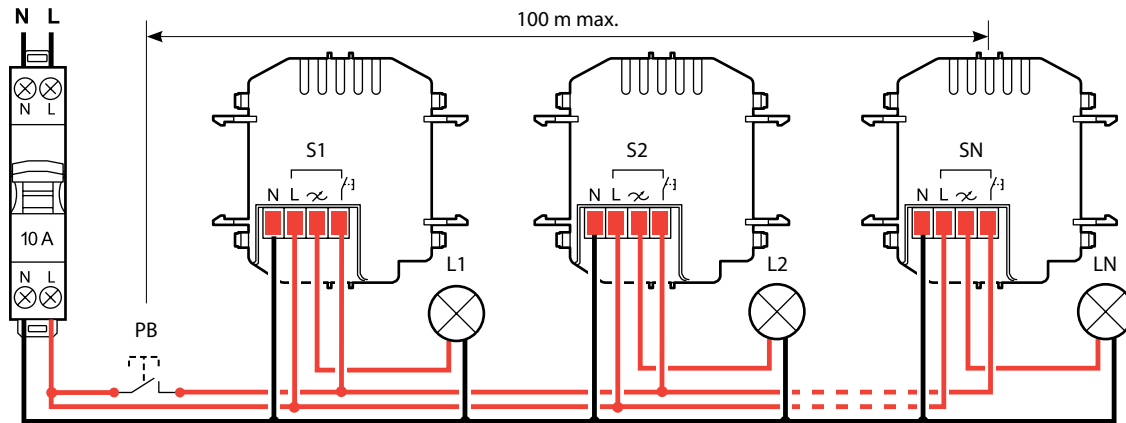


■ 4.4 Wiring for a single load connected in parallel

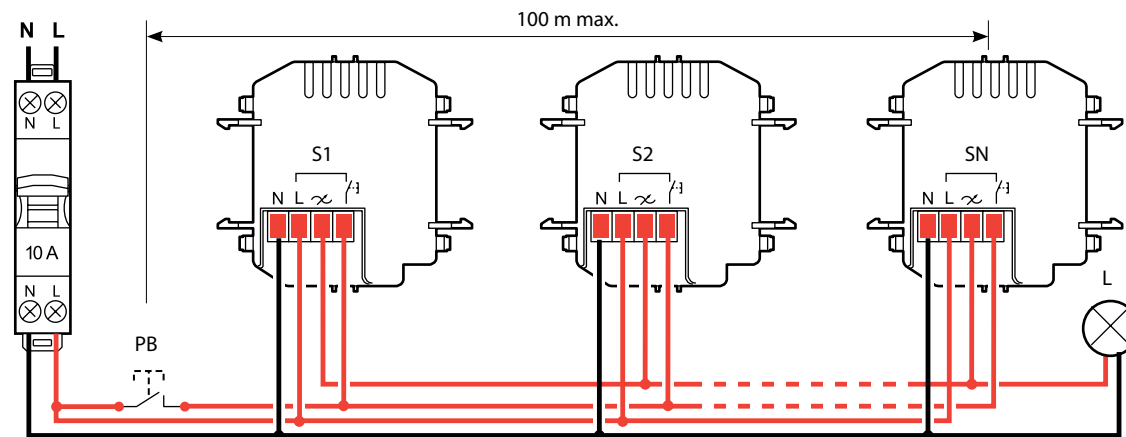

5. INSTALLATION

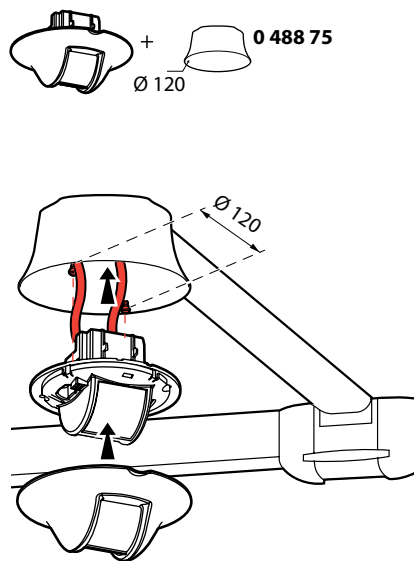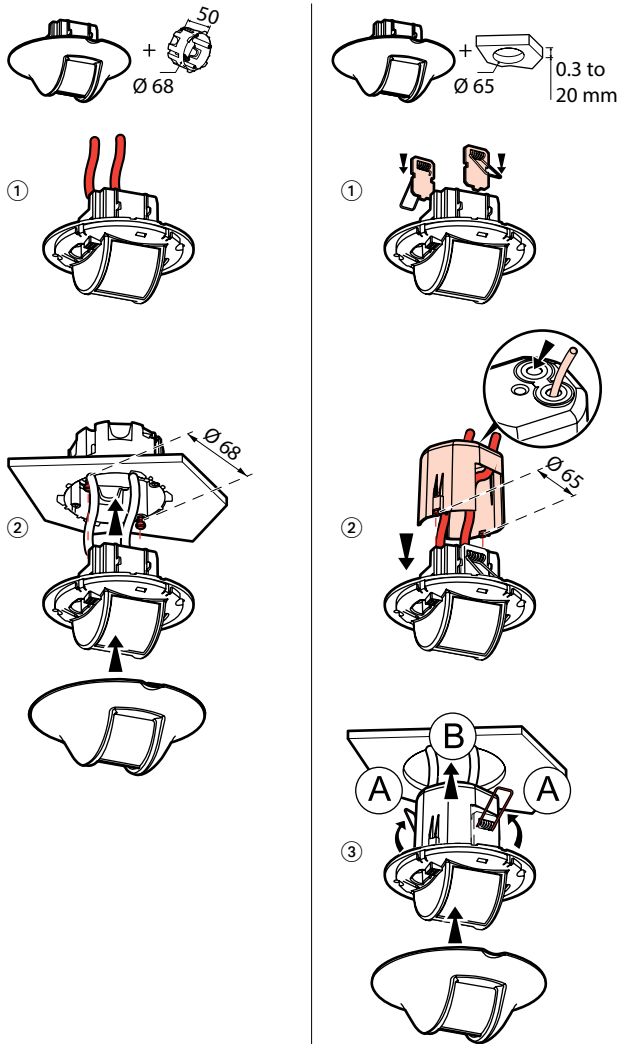

6. REMOVAL

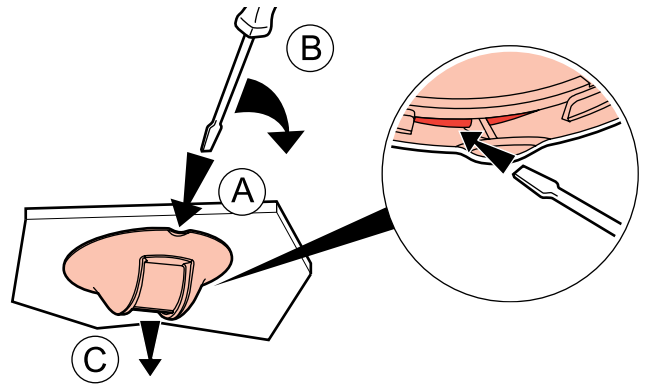

7. OPERATION

Manual ON/Automatic OFF mode


Pressing the auxiliary control allows the load to be switched on or off manually. If the control is not pressed, the sensor will cut off the load at the end of the time delay or when the light level threshold has been reached.

Auto ON/OFF mode:

The load will be switched on and off automatically.

Option: It is possible to control the sensor by infrared remote control using Cat. Nos. 0 882 00/01/20/31/32/33.

■ **7.1 More than one sensor and more than one load**



- Inversion of the state of the loads: < 1 s
- Synchronisation of all loads to ON: > 1 s
- Synchronisation of all loads to OFF: > 1 s + < 1 s

L1 OFF	S1 OFF	PB < 1 s	L1 ON	S1 ON
L2 OFF	S2 OFF		L2 ON	S2 ON
Ln OFF	Sn OFF		Ln ON	Sn ON
L1 ON	S1 ON	PB < 1 s	L1 OFF	S1 OFF
L2 ON	S2 ON		L2 OFF	S2 OFF
Ln ON	Sn ON		Ln OFF	Sn OFF
L1 ON	S1 ON	PB > 1 s + < 1 s	L1 OFF	S1 OFF
L2 OFF	S2 OFF		L2 OFF	S2 OFF
Ln OFF	Sn OFF		Ln OFF	Sn OFF
L1 ON	S1 ON	PB > 1 s	L1 ON	S1 ON
L2 OFF	S2 OFF		L2 ON	S2 ON
Ln OFF	Sn OFF		Ln ON	Sn ON

7. OPERATION (continued)

■ **7.2 Several sensors connected to a single load**

L OFF	S1 OFF S2 OFF Sn OFF	PB < 1 s	L ON	S1 ON S2 ON Sn ON
L ON	S1 ON S2 ON Sn ON		PB < 1 s	L OFF
L ON	S1 ON S2 OFF Sn OFF	PB < 1 s		L ON
L ON	S1 ON S2 OFF Sn OFF		PB > 1 s + < 1 s	L OFF
L ON	S1 ON S2 OFF Sn OFF	PB > 1 s		L ON

8. SETTINGS

8.1 Detection parameters

Sensor parameters		Default value	Modifiable parameters	Configuration tools	
				0 882 30	0 882 35
Time delay		10 min	3, 5, 10, 15, 20 min 0 - 59 min 59 s	– ✓	✓ –
Sensitivity		PIR (very high)/ US (high)	Low, medium, high, very high	✓	✓
Modes	Auto on/ Auto off	Inactive	Activate/ Deactivate	✓	✓
	Walk-through mode	Active	Activate/ Deactivate	✓	✓
	Manual on/ Auto off	Inactive	Activate/ Deactivate	✓	✓
Detection system	Initial	PIR and US	PIR and/or US, PIR, US	✓	–
	Maintain	PIR or US	PIR and/or US, PIR, US	✓	–
	Restart	PIR or US	PIR and/or US, PIR, US, Deactivate	✓	–
Alarm		Inactive	Activate/ Deactivate	✓	–

⌚ **Time delay:** Length of time the load is on after detection.

Pulse mode (= push-button mode): If the time delay parameter is at 0, the sensor is in push-button mode. In this case, there is a 10 minute time delay before the load is switched off. If the setting is overridden or there is a new detection, the 10 minute time delay starts again. Available with configuration tool 0 882 30.

🔊 **Sensitivity:** Detection range setting.

Modes:🔁 **Auto on/Auto off mode:**

Automatic switch-on:

- On detection of presence if the natural light level is insufficient.

Automatic switch-off:

- If no presence is detected and at the end of the set time delay

- Or if the natural light level is sufficient (regulation activated)

Another detection causes automatic switch-on if there is insufficient light.

🚶 **Walk-through mode:**

- If no presence is detected in the 20 seconds following an initial detection, the product will cut off the load after 3 minutes.

- If another presence is detected in the 3 minutes following initial detection, the device will cut off the load at the end of the set time delay.

👤 **Manual on/Auto off mode:**

Manual switch-on, automatic switch-off:

- When no presence is detected and at the end of the set time delay.

After switch-off, any new detection within a 30 second period triggers an automatic switch-on. The Restart function must be activated.

After 30 seconds the device is switched on via a manual switch.

8. SETTINGS (continued)

8.1 Detection parameters (continued)

Detection system:

Initial detection: The load is switched on as soon as the first detection occurs if the natural light level is below the light level threshold.

Maintain: The load remains active if another presence is detected.

Restart: In manual mode. After switch-off, any new detection within a 30 second period triggers an automatic switch-on.

After 30 seconds the device must be switched on manually.

Possible in Manual on/Auto off mode only.

Alarm: An audible signal is emitted before switch-off (1 minute before, then 30 seconds, then 10 seconds).

8.2 Light parameters

Sensor parameters		Default value	Modifiable parameters	Configuration tools	
				0 882 30	0 882 35
Light level threshold		150 lux	20, 100, 300, 500, 1000 lux 0 - 1275 lux	– ✓	✓ –
Advanced mode	Calibration	–	0 - 99995 lux	✓	–
	Regulation	Active	Activate/ Deactivate	✓	–
	Light contribution	Auto	Auto - 1275 lux	✓	–

☀️ **Light level threshold:** Value at which the load comes on if the natural light level is less than the setting.

👁️ **Eye function:** Value 0 (eye on configuration tool 0 882 30) is used to save the ambient light level in the room as a light level threshold.

Advanced mode:


🔧 **Calibration:** The ambient light level measured with a luxmeter must then be transmitted to the detector.

🕒 **Regulation:** Automatic switch-off of the load 10 minutes after the light level threshold is exceeded with an additional safety threshold (to avoid lights switching off at the wrong moment).

Light contribution: Quantity of additional lux provided by the load being switched on.

When the light contribution parameter is set to "Auto" on the configuration tool Cat. No. 0 882 30 the sensor automatically calculates the light contribution.

8.3 Modifying the parameters using the configuration tools

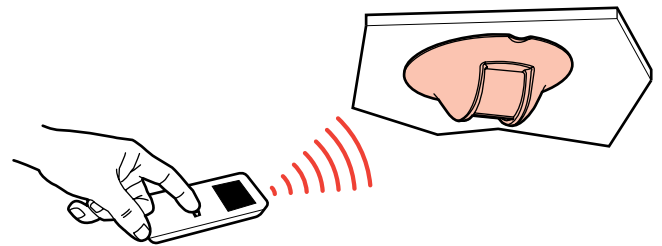

• 0 882 35: Simplified configuration tool

• 0 882 30: Advanced configuration tool

When the sensor receives an IR command via a configuration tool, it emits a beep confirming that the modification has been taken into account.


For more information about setting parameters, refer to the data sheet for the configuration tool Cat. No. 0 882 30.

- Return to factory settings:

1st press: Short press on LEARN: the LED flashes slowly.

2nd press: Press and hold down LEARN for 10 seconds until the LED flashes quickly.

9. PERFORMANCE

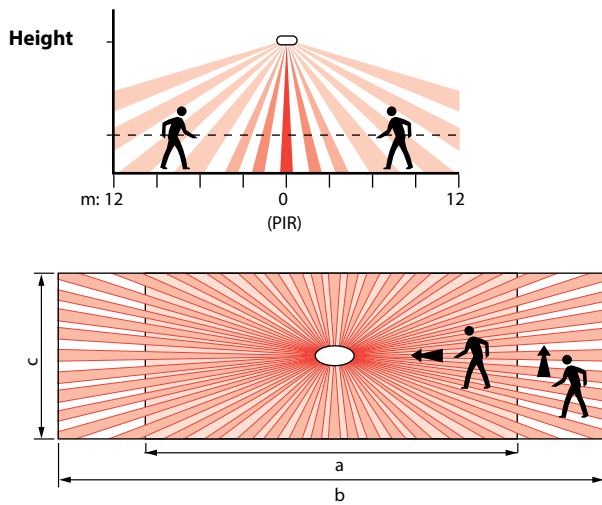

Height (m)	Sensitivity Low (25%)			Sensitivity Medium (50%)		
	a (m)	b (m)	c (m)	a (m)	b (m)	c (m)
	2.5	7	10	3	8	14
3	7	10	3	8	14	3
3.5	9	10	3	12	14	3
4	10	8	3	13	9	3

Height (m)	Sensitivity High (75%)			Sensitivity Very high (100%)		
	a (m)	b (m)	c (m)	a (m)	b (m)	c (m)
	2.5	10	16	3	16	24
3	10	16	3	16	24	3
3.5	14	16	3	17	24	3
4	15	10	3	18	14	3

10. CARE

Keep the lens clean.
 Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistant to the following products: - Hexane (EN 60669-1)
 - Methylated spirit
 - Soapy water
 - Diluted ammonia
 - Bleach diluted to 10%
 - Window-cleaning products

Caution:

Always test before using other special cleaning products.

11. STANDARDS

Directive: CE
 Installation standards: NFC 15-100
 Product standards: IEC 60669-2-1
 Environmental standards:
 - European directive 2002/96/EC:
 WEEE (Waste Electrical and Electronic Equipment)
 - European Directive 2002/95/EC:
 RoHS (Restriction of Hazardous Substances)
 - Decrees and/or regulations: Public buildings
 Workplace buildings
 High-rise buildings

12. TROUBLESHOOTING

PROBLEM	CAUSES	SOLUTIONS
Lighting stays on when there is no-one present	Some sources of interference, such as air currents, vibrations and radiators, can cause unintended operation	1- Reduce the sensitivity level 2- If the interference continues, using the configuration tool, go into the Detection system parameters, select Maintain and then choose PIR 3- If the interference still continues, move the sensor away from the source(s) of interference
Lighting does not switch off during the day when there is an adequate level of natural light	Regulation function not active Light level threshold set too high Light contribution is too high	Activate the regulation function Reduce the light level threshold Check that the sensor is positioned correctly in relation to the window Decrease the power of the luminaires
Lighting switches off when there are people present and the natural light level is not adequate (darkness)	Time delay too short Detection sensitivity too low Light level threshold too low	Increase the time delay 10 to 1 minutes is recommended for work areas Increase the sensitivity Move the sensor closer to the work area Increase the threshold