


# Mosaic™ Programme mechanisms

## proximity MCBs

### Utilisation example of an RCBO

To associate with a modular RCBO (p. 59)  
 In case of local failure (on workstation), enables the user to reset the RCBO with no impact on other groups of sockets

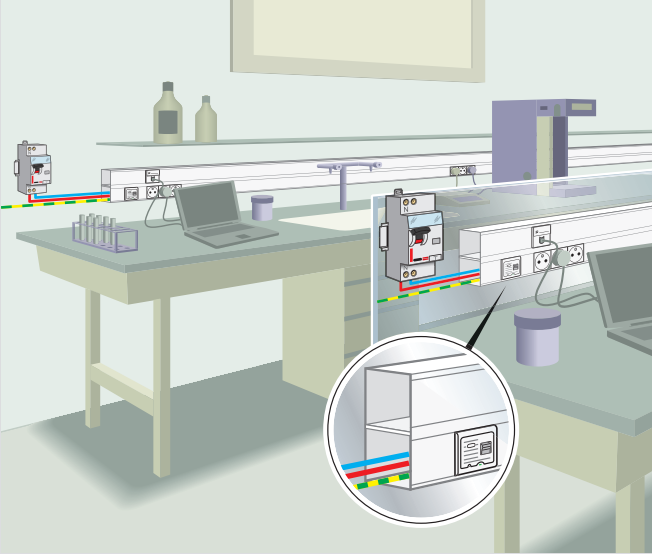

### Selectivity

RCBOs or upstream MCBs		DX <sup>3</sup> 4500 - 6 kA / DX <sup>3</sup> 6000 - 10 kA DX <sup>3</sup> 10000 - 16 kA / Ph + N, 1P, 2P, 3P, 4P C curve						
		16 A	20 A	25 A	32 A	40 A	50 A	63 A
Downstream MCBs	10 A	120	150	187	240	300	375	472
	16 A	-	150	187	240	300	375	472

RCBOs or upstream MCBs		DX <sup>3</sup> 10000 - 16 kA (80 à 125 A) DX <sup>3</sup> 25 kA, 36 kA, 50 kA C curve									
		16 A	20 A	25 A	32 A	40 A	50 A	63 A	80 A	100 A	125 A
Downstream MCBs	10 A	120	150	210	500	700	1000	1800	3000	5000	T
	16 A		150	187	300	500	700	1300	2000	3600	5500