


Signalisation lumineuse

Tableau des sons pour les réf. 041396/97/98


| N° | Représentation | F (Hz) | Cycles |
|----|----------------|-------------|------------------------------------|
| 0 | | 600 – 700 | 0,5s/0,5s |
| 1 | | 440 – 560 | 565s/565s |
| 2 | | 800 – 970 | 0,25s/0,25s |
| 3 | | 800 – 970 | 0,8s/0,8s |
| 4 | | 1000 – 2000 | 1s/1s |
| 5 | | 420 | 0,625s ON/0,625s OFF |
| 6 | | 660 | 0,15s ON/0,15s OFF |
| 7 | | 660 | 1,8s ON/1,8s OFF |
| 8 | | 660 | 0,5s ON/0,5s OFF |
| 9 | | 720 | 0,7s ON/0,3s OFF |
| 10 | | 750 | 0,33s ON/0,5s OFF |
| 11 | | 800 | 0,25s ON/1s OFF |
| 12 | | 970 – 800 | 0,35s/0,35s/0,35s OFF X 3 1,5s OFF |
| 13 | | 970 | 0,5s ON/0,5s OFF X 3 1,5s OFF |
| 14 | | 970 | 0,25s ON/0,25s OFF |
| 15 | | 2850 | 1s ON/1s OFF |
| 16 | | 2850 | 0,25s ON/0,25s OFF |
| 17 | | 300 | |
| 18 | | 660 | |
| 19 | | 750 | |
| 20 | | 2850 | |
| 21 | | 500 – 1200 | 3,5s ON/0,5s OFF |
| 22 | | 500 – 1200 | 0,5s ON/0,5s OFF X 3 1,5s OFF |
| 23 | | 800 – 970 | 0,5s ON/0,5s OFF X 3 1,5s OFF |
| 24 | | 1000 – 1700 | Cycle 0,25s |
| 25 | | 1000 – 1700 | Cycle 0,8s |
| 26 | | 1000 – 3000 | Cycle 0,64s |
| 27 | | 1000 – 3000 | Cycle 0,32s |
| 28 | | - | Aléatoire |
| 29 | | - | Aléatoire |
| 30 | | 700 - 600 | 0,35s/0,7s/0,5s OFF |
| 31 | | 554 - 440 | 0,35s/0,7s/0,5s OFF |
| 32 | | 480 – 610 | 0,5s/0,5s |
| 33 | | 970 – 630 | 0,5s/0,5s |
| 34 | | 554 – 440 | 0,1s/0,4s |
| 35 | | 440 – 554 | 0,5s/0,5s |
| 36 | | 510 – 610 | 0,5s/0,5s |
| 37 | | 510 – 610 | 1s/1s |
| 38 | | 600 – 700 | 1s/1s |
| 39 | | 550 – 1000 | 0,5s/0,5s |
| 40 | | 550 – 1000 | 1s/1s |
| 41 | | 800 – 1000 | 0,5s/0,5s |
| 42 | | 800 – 1000 | 1s/1s |
| 43 | | 1000 – 2000 | 0,5s/0,5s |
| 44 | | 2400 – 2850 | 0,265s/0,265s |
| 45 | | 2400 – 2850 | 0,465s/0,465s |
| 46 | | 640 – 970 | 0,5s/0,5s |
| 47 | | 490 – 610 | 0,25s/0,25s |
| 48 | | 610 | - |
| 49 | | 500 | - |
| 50 | | 970 | - |
| 51 | | 490 | 0,5s ON/1s OFF |
| 52 | | 544 | 0,625s ON/0,625s OFF |
| 53 | | 660 | 6,5s ON/13s OFF |
| 54 | | 970 | 1s ON/1s OFF |
| 55 | | 2850 | 0,5s ON/0,5s OFF X 3 1,5s OFF |
| 56 | | 500 – 1200 | Cycle 3,75s/0,25s OFF |
| 57 | | 1400 – 1600 | Cycle 1,5s |
| 58 | | 800 – 970 | Cycle 1,5s |
| 59 | | 1200 – 500 | Cycle 1s |
| 60 | | - | Aléatoire |
| 61 | | 500 – 1500 | Cycle 0,64s |
| 62 | | 500 – 1500 | Cycle 0,32s |
| 63 | | 554 – 440 | 0,35s/0,7s/0,5s OFF |

Dimensions des bases

Réf. 041380

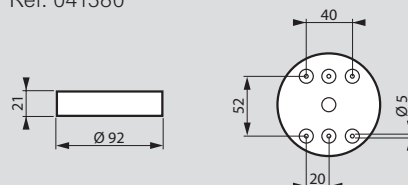

Réf. 041381/82/83

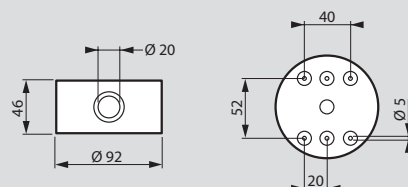

Réf. 041375/84

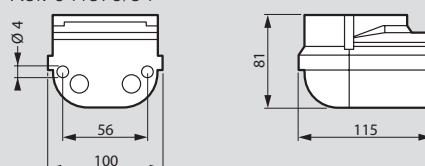


Tableau des consommations

| | | | |
|--------|--|-------------|------------------------|
| 041386 | | 085 cd | 041386/87/88/90/91 |
| 041387 | | 640 cd | 12 V - 250 mA |
| 041388 | | 680 cd | 24 V - 155 mA |
| 041389 | | 215 cd | 40 V - 200 mA |
| | | 215 cd | 120 V - 70 mA |
| 041390 | | 365 cd | 240 V - 55 mA |
| | | 5 cd | 041389 |
| 041391 | | 7 cd | 12 V - 100 mA |
| | | | 24 V - 75 mA |
| | | | 40 V - 175 mA |
| | | | 120 V - 40 mA |
| | | | 240 V - 30 mA |
| | | | + 041380/75/84 : IP 44 |
| | | | + 041381/82/83 : IP 65 |
| 041392 | | 7 cd | 12 V - 270 mA |
| 041393 | | 5 cd | 24 V - 205 mA |
| | | | 40 V - 125 mA |
| | | | 120 V - 65 mA |
| | | | 240 V - 40 mA |
| | | | + 041380/75/84 : IP 44 |
| | | | + 041381/82/83 : IP 65 |
| 041394 | | 80 cd | 12 V - 210 mA |
| 041395 | | 50 cd | 24 V - 165 mA |
| | | | 40 V - 155 mA |
| | | | 120 V - 60 mA |
| | | | 240 V - 40 mA |
| | | | + 041380/75/84 : IP 44 |
| | | | + 041381/82/83 : IP 65 |
| 041396 | | 3 cd | 12 V - 315 mA |
| | | | 24 V - 280 mA |
| 041397 | | 5 cd | 40 V - 110 mA |
| | | | 80 V - 75 mA |
| | | | 240 V - 50 mA |
| | | | + 041380/75/84 : IP 44 |
| | | | + 041381/82/83 : IP 65 |
| 041398 | | 54 - 102 dB | 12 V - 280 mA |
| | | | 24 V - 185 mA |
| | | | 40 V - 70 mA |
| | | | 80 V - 55 mA |
| | | | 240 V - 35 mA |
| | | | + 041380/75/84 : IP 44 |
| | | | + 041381/82/83 : IP 65 |

