

Datasheet

Camping Extension Lead with RCD Switch

CAT NO. R2810CLRCD




R2810CLRCD

Cat no.	Supply voltage	Current	Colour	Lead length	Lead type	Tripping current
R2810CLRCD	230-240V a.c. 50 Hz	10A	Yellow	10m	3 core 1.5mm ² flexible extra heavy-duty	30mA

Camping Extension Lead with RCD Switch

CAT NO. **R2810CLRCD**

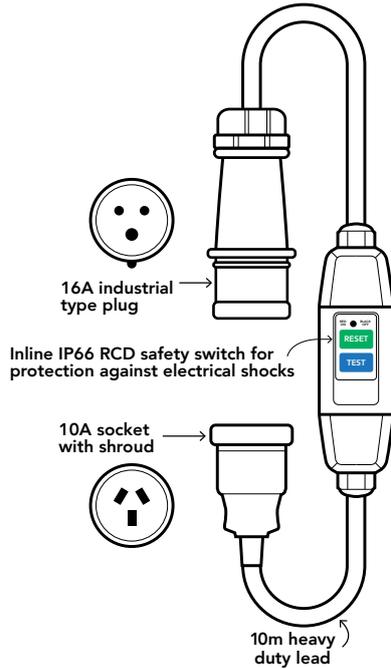

Single product (QTY1)			
Cat No	Dimensions	Weight	Barcode
R2810CLRCD	330 x 330 x 60mm	2.2kg	9321001450573

Inner box (QTY3)			
Cat No	Dimensions	Weight	Barcode
R2810CLRCD	342 x 338 x 188mm	6.7kg	9321001450580

Outer box (QTY6)			
Cat No	Dimensions	Weight	Barcode
R2810CLRCD	698 x 351 x 204mm	13.5kg	9321001450597

HPM RCD Safety Switch constantly monitors the balance of the current flow in both active and neutral wires of the device and down stream lead.

If an imbalance occurs, as it would if the appliance became faulty and current leaked to earth (possibly through the body of the user), the RCD Safety Switch would detect this imbalance and cut off the power within 40ms (fourty thousandths of a second).

The loss of current to earth can be as small as 30 milliamps (thirty thousandths of an amp) for the RCD Safety Switch to respond.

The time that a person is exposed to an electric shock is a crucial factor in determining the severity of the accident.

Refer to your group buying office, HPM Legrand Sales Representative or HPM Legrand Sales Office for pricing.

HPM Legrand - NZ
0800 476 009
www.legrand.co.nz