


Modul'up™ with Netatmo DCL connected ON/OFF 300 W

Référence : 0 885 21



1. USE

Lighting appliance.

Connected DCL Modul'up with Netatmo for any type of lamp including LED.


This product is an accessory that necessitate first the installation of a "Céliane, Mosaic, Dooxie with Netatmo" starter pack.

Its receiver function allows it to be combined with 1-gang or 2-gang (wireless switches), IR detectors, by tapping the wireless control on the DCL. Configuration with the application Legrand Home + control.

2. RANGE


Description	Reference
Connected DCL socket with one ON/OFF circuit. Equipped with an LED indicator (configuration) and a RESET (hidden) use to return to factory settings.	0 885 21

3. DIMENSIONS (mm)

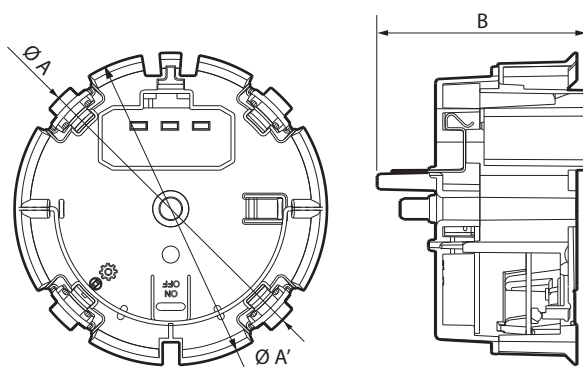

Ø A	Ø A'	B
93	75	50.5

4. FUNCTION

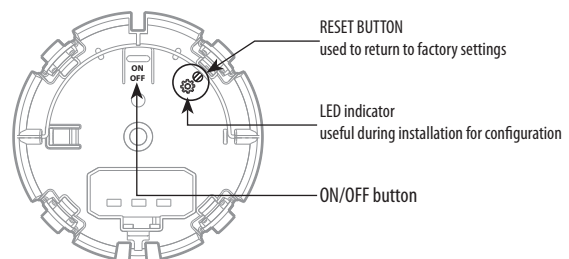

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against impacts: IK 04

Protection against solid/bodies and liquids: IP 20

■ 5.2 Material characteristics

Casing: PC

Base mechanism: PC

Cover: ABS

Hook: Steel

UV resistance

Halogen free

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

■ 5.3 Electrical characteristics

ZigBee radio technology frequency 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)

Range: 200 m of unobstructed space

10 m between products indoors

Consumption: - operation: 0.5 W

- Standby: 0.2 W

Voltage: 250 V~











Frequency: 50/60 Hz

Integrated surge protection

5. TECHNICAL CHARACTERISTICS (continued)

■ 5.3 Electrical characteristics (continued)

Table of loads

		R	L			
			LED 			^(**) 
						
240 V~	Max.	300 W	^(*) 100 W	250 W	250 VA	250 VA
100 V~	Max.	150 W	^(*) 50 W	125 W	125 VA	125 VA

^(*) For comfortable lighting, we recommend using bulbs of the same type and make.

^(**) The ferromagnetic transformers must be charged to more than 60% of their power. When calculating the permissible power, the ferromagnetic transformer efficiency must be taken into account. A load must be connected before programming and using the product.

■ 5.4 Climate characteristics

Use temperature: + 5° C to + 45° C

Storage temperature: - 10° C to + 70° C

6. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 885 21) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com