




# Arteor™ with Netatmo - Bristish Standard Connected ON/OFF wireless controls for lighting and socket outlets

Cat. Nos: 5 746 63/64/65/66/67/68/69/70/71/72/73/74







5 746 71/72/73/74

# 1. USE

Wireless controls for ON/OFF/dimming light functions or connected socket outlets.

This product controls "with Netatmo" micromodule products, connected socket outlets and connected switches.


Can be used as a two-way switch or to control a lighting group.

- Fixes directly on the wall or screws onto a flush-mounting box.
- Fits on furniture (movable).
- 1-gang can be combined with 20 wired products.
- 2-gang can be combined with 2 x 20 wired products.
- 3-gang can be combined with 3 x 20 wired products.

### 2. RANGE

Description		Magnesium	Soft Alu	Champagne
Wireless lighting and socket outlets controls, for an ON/OFF, dimming, centralisation function.	5 746 63	5 746 64	5 746 65	5 746 66
	1-gang	1-gang	1-gang	1-gang
Supplied with secable support frame, rocker plate and a battery.  Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return	5 746 67	5 746 68	5 746 69	5 746 70
	2-gang	2-gang	2-gang	2-gang
to factory settings.	5 746 71	5 746 72	5 746 73	5 746 74
Repositionable self-adhesive fixings (supplied).	3-gang	3-gang	3-gang	3-gang

# 3. DIMENSIONS (mm)






Α	В	B'	С
82	116.5	82	12

# 4. OPERATION

1-gang: 5 746 63/64/65/66




Short press: ON/OFF Long press: Dimming +

LED indicator:

- useful during installation

- when pressed, burst flashes red if the battery power is low

Short press: ON/OFF Long press: Dimming -





RESET button used to return to factory mode  $\,$ 

# Arteor™ with Netatmo - Bristish Standard Connected ON/OFF wireless controls for lighting and socket outlets

#### **4. OPERATION** (continued)


#### 2-gang: 5 746 67/68/69/70

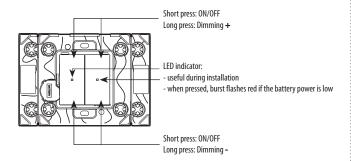




RESET button used to return to factory mode

### 3-gang: 5 746 71/72/73/74

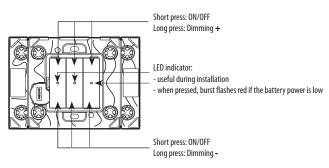



RESET button used to return to factory mode

# **5. TECHNICAL CHARACTERISTICS**

#### ■ 5.1 Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies and/or liquids: IP 20

#### ■ 5.2 Material characteristics

Rocker plate: ABS

Mechanism casing with grid: Fibreglass-reinforced (20%) PC

Halogen-free

**UV-resistant** 

Self-extinguishing: 650°C/30 s

#### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied) Battery life: 8 years for 10 activations a day

#### ZigBee radio technology

frequency: 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

#### ■ 5.4 Climate characteristics

Storage temperature: 0° C to + 45° C Usage temperature: +5° C to + 35° C

#### 6. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products:

Hexane), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.



Take care to recycle the battery appropriately.

#### 7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (5 746 63/64/65/66/67/68/69/70/71/72/73/74) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com