


Characteristics

 100 - 240 Vac 50 - 60 Hz	 2 x 2.5 mm ²	 	 	 + (*) 	 + (*)
230 Vac	Max.	1000 W	1000 W	1000 VA	600 VA
	Min.	60 W	60 W	60 VA	60 VA
127 Vac	Max.	500 W	500 W	500 VA	300 VA
	Min.	60 W	60 W	60 VA	60 VA

(*) Use only transformers which are intended for use with an electronic switch.

Description

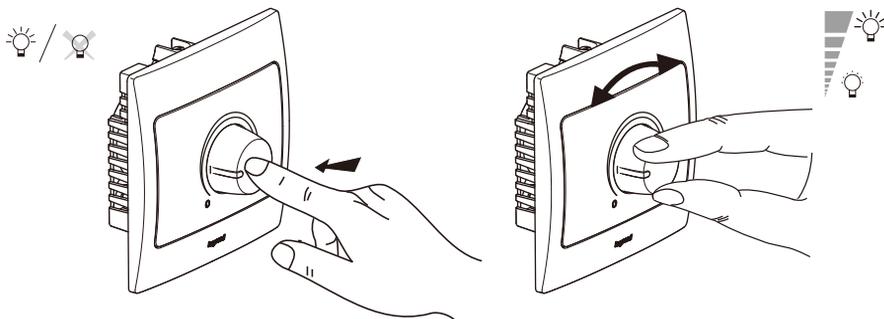

Important:

Transformer losses should be taken into account in the power calculation.
 Transformers should be loaded to more than 60 % of their capacity.

Important:

If the wiring diagrams are not complied with, or if the values shown in the table are exceeded (voltage, power, temperature, frequency), or if the power is too low and causes the light to blink, the fitting could be severely damaged.

Wiring


Important:

There is a switch for the rated voltage on the upper right corner of the base.


It must be set in the position corresponding to the used voltage:

- on 230 V if the rated voltage used is 230 V, or
- on 127 V if the rated voltage used is 127 V.



1-way connection (sketch 1)

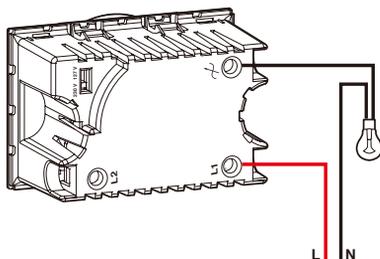



Double-way connection (sketch 2)

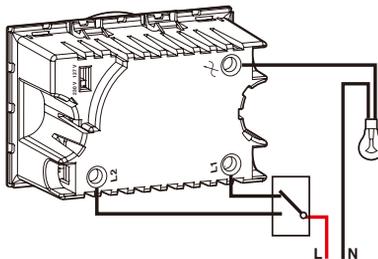

For extra low voltage halogen lamps with ferromagnetic transformers (sketch 3)

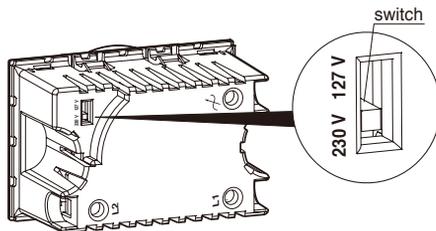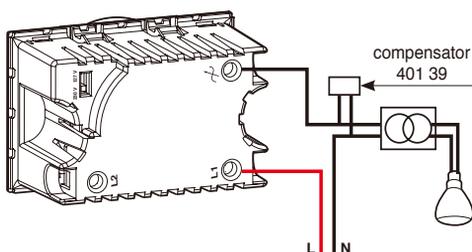

Installation

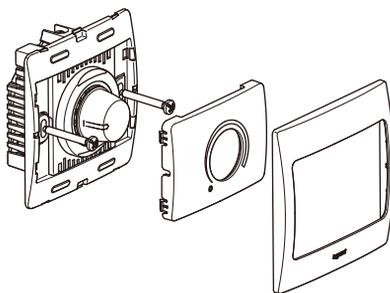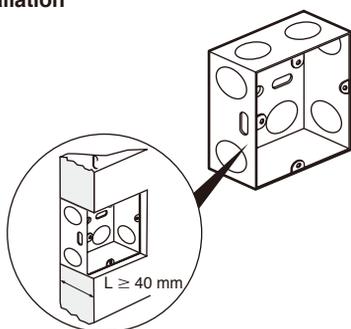

Safety instructions

GB IE

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.

Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.

Use only Legrand brand accessories.