


This product is a connected accessory which **requires** you to buy and install the Arteor™ Advance with Netatmo Smart Gateway.

Pack contents

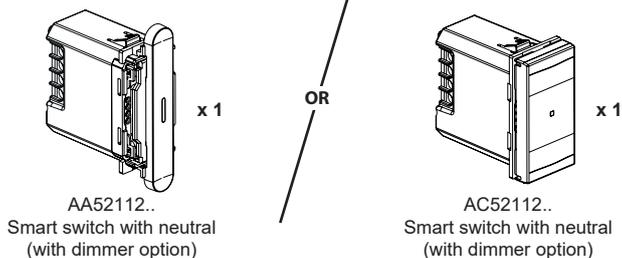

Frequency bands: 2.4 - 2.4835 GHz Power level: < 100 mW

Characteristics

In default operating mode (on/off), this switch works with the following bulbs:

 + 35° C + 5° C	 LED	 LED	 LED	 LED	 LED
110-240 VAC 50/60 Hz	2 x 1,5 mm ² 1 x 2,5 mm ²				
240 VAC	Max.	150 W	(*) 150 VA	150 VA	150 VA
110 VAC	Max.	75 W	(*) 75 VA	75 VA	75 VA

(*) or 15 bulbs max. For comfortable lighting, we recommend using bulbs of the same type and manufacturer.


In dimmer option operating mode (which can be activated via the App) this switch functions only with dimmable bulbs (identifiable by the logo on packaging).




Before you start: wiring precautions

⚠ Do not use: two smart switches to control the same lighting point.


If you plan to install two-way light switches, read the following precautions:

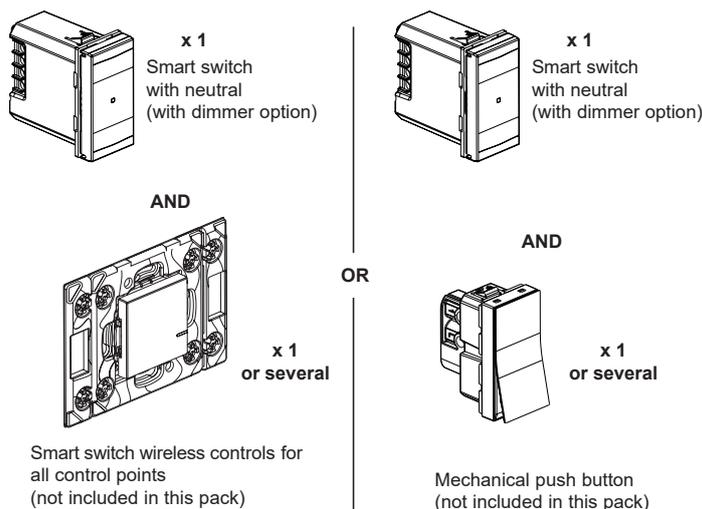


Tip if replacing a two-way switch using a wireless control: old flush-mounted switch replaced by the wireless control.

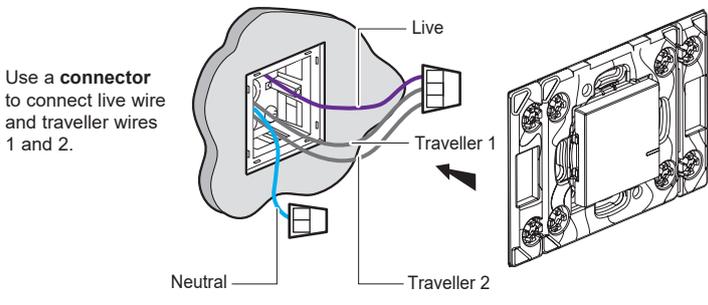


① Necessary safety precautions



② Install the smart switch with neutral

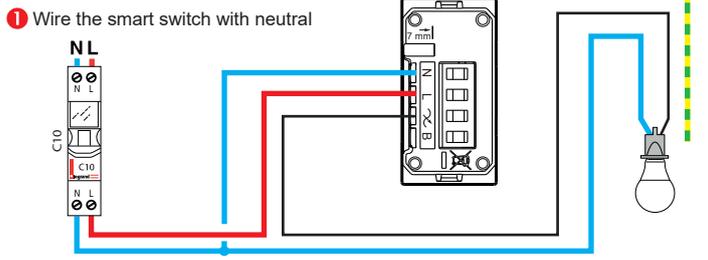

1 Or wire the smart switch with neutral (+ mechanical push buttons)

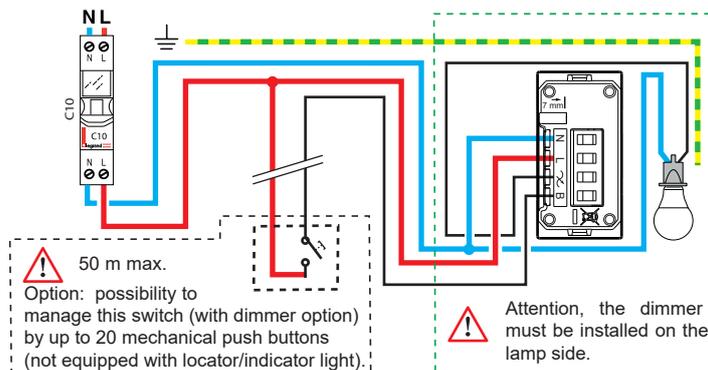

— N (neutral) = blue
— L (live) = any except blue and green/yellow
— Earth = green/yellow

⚠ The smart switch with neutral (with dimmer option) works with standard or dimmable bulbs including LED. LED dimmable bulbs are mandatory for an optimal dimmer usage.



③ To add a connected product to your connected installation, you should follow the instructions:

- in the **Legrand Home + Control** application (settings/Add a new product section)
- or consult the user manual on legrand.com



www.legrand.com/reference/AC52112MW

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

⚠ Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,
Legrand
declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.
The full text of the EU declaration of conformity is available on the following website:

www.legrand.com/ecatalogue

