


# DPX<sup>3</sup> 1600

## equipment and accessories

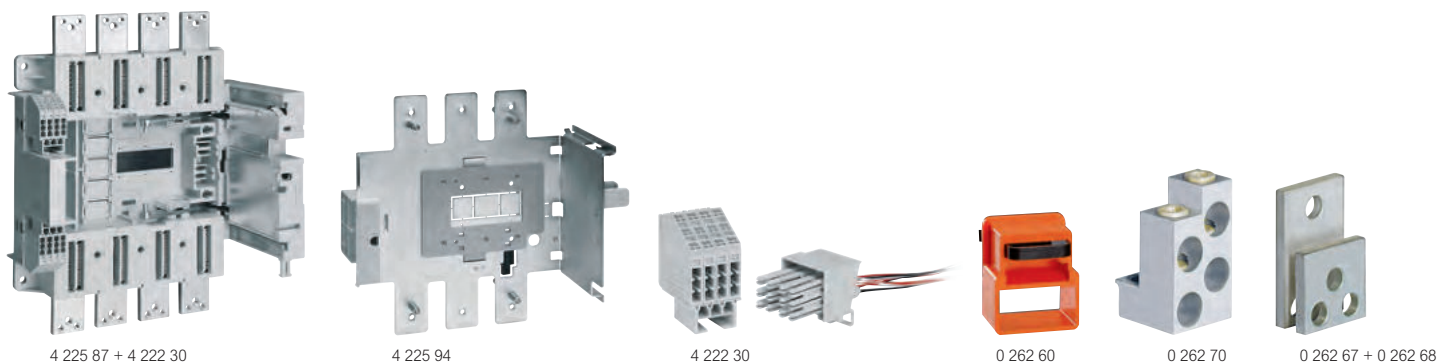

Pack	Cat.Nos	Draw-out version	Pack	Cat.Nos	Motor-driven handles
		A DPX <sup>3</sup> draw-out version is a DPX <sup>3</sup> fitted with draw-out base and a "Debro-lift" mechanism which can be used to withdraw the DPX <sup>3</sup> while keeping it on its base			<b>Factory assembled</b> Front operated 230 V~
		<b>Draw-out base</b> For DPX <sup>3</sup> 1600 equipped with "Debro-lift" mechanism Cat.No 4 225 93 or 4 225 94			<b>Customer assembled</b> Front operated 24 V~ / = for In ≤ 1250 A 48 V~ / = for In ≤ 1250 A 110 V~ / = for In ≤ 1250 A 230 V~ / = for In ≤ 1250 A 24 V~ / = for In = 1600 A 48 V~ / = for In = 1600 A 110 V~ / = for In = 1600 A 230 V~ / = for In = 1600 A
1	3P   4P 4 225 86   4 225 87	Front terminals	1	0 261 24	
1	4 225 88   4 225 89	Rear terminals	1	0 261 25	
		<b>Debro-lift mechanism</b> For DPX <sup>3</sup> 1600 To be fitted on a DPX <sup>3</sup> 1600 fixed version in order to obtain the movable part of a draw-out circuit breaker	1	0 261 26	
1	4 225 93   4 225 94		1	0 261 23	
		<b>Key-lock for "Debro-lift" mechanism</b> Enable locking of DPX <sup>3</sup> in drawn-out position	1	0 261 19	
1	4 228 10	Mechanical support for locking DPX <sup>3</sup> only To be equipped with universal key-locks Cat.Nos 4 238 80/81/82/83 (p. 180)	1	0 261 28	
1	4 228 09	Mechanical support for locking motor-driven DPX <sup>3</sup> or DPX <sup>3</sup> equipped with rotary handle To be equipped with universal key-locks Cat.Nos 4 238 80/81/82/83 (p. 180)	1	0 261 29	
		<b>Accessories for "Debro-lift" mechanism</b> Handle for drawing-out	1	0 261 27	
1	0 265 75		1	4 228 06	<b>Locking accessories</b> Mechanical support for locking motor-driven handle To be equipped with universal key-locks Cat.Nos 4 238 80/81/82/83 (p. 180)
1	0 265 74				<b>Accessories</b>
		<b>Auxiliary contacts</b> Automatic auxiliary contacts for DPX <sup>3</sup> draw-out version (up to 2 contacts by DPX <sup>3</sup> )			<b>Insulated shields (phase barriers)</b> Used to isolate the connections between each pole Set of 3
		<b>Plates for transfer switches</b> A transfer switch plate is composed of one plate with interlock for 2 devices	1	0 262 66	
1	0 264 10	Plate for MCCBs or trip-free switch fixed version	1	3P   4P 0 262 64   0 262 65	<b>Sealable terminal shields</b> Set of 2
1	0 264 05	Plate for MCCBs or trip-free switch plug-in and draw-out version			<b>Padlock</b> For locking in "open" position
		<b>Rotary handles</b>	1	0 262 60	<b>Cage terminals</b> Set of 1 terminal for cables without lug 2 x 240 mm <sup>2</sup> for rigid cable or 2 x 185 mm <sup>2</sup> for flexible cable
1	0 262 61	<b>Direct on DPX<sup>3</sup></b> Standard (black)	1	0 262 69	Set of 1 high-capacity terminal for cables without lug 4 x 240 mm <sup>2</sup> for rigid cable 4 x 185 mm <sup>2</sup> for flexible cable
		<b>Vari-depth handle IP 55</b> Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism	1	0 262 70	<b>Extended front terminals</b> Set for 1 pole Terminals for 630 - 1250 A (2 bars max. per pole) Terminals for 1600 A (3 bars max. per pole)
1	0 262 83	Standard (black)	1	0 262 67	
1	0 262 84	For emergency use (red/yellow)	1	0 262 68	
		<b>Locking accessories</b> Mechanical support for locking vari-depth handle To be equipped with universal key-locks Cat.Nos 4 238 80/81/82/83 (p. 180)	1	3P   4P 0 262 73   0 262 74	<b>Spreaders</b> Set of incoming or outgoing spreaders
1	4 228 07		1	0 263 80   0 263 82 0 263 81   0 263 83	<b>Rear terminals</b> Used to convert the fixed version with front terminals to the fixed version with rear terminals Set of incoming or outgoing rear terminals Short terminals Long terminals
			1	4 225 90   4 225 91	<b>IP 20 terminal covers</b> Set of 2 terminal covers
			1	4 225 92	<b>External neutral</b> External neutral

For the old range of accessories for DPX 1600 draw-out version  
**Please, consult us**

Universal key-locks for DPX<sup>3</sup> 1600  
**p. 180**

Red catalogue numbers: New products