


Viking™ 3 power terminal blocks

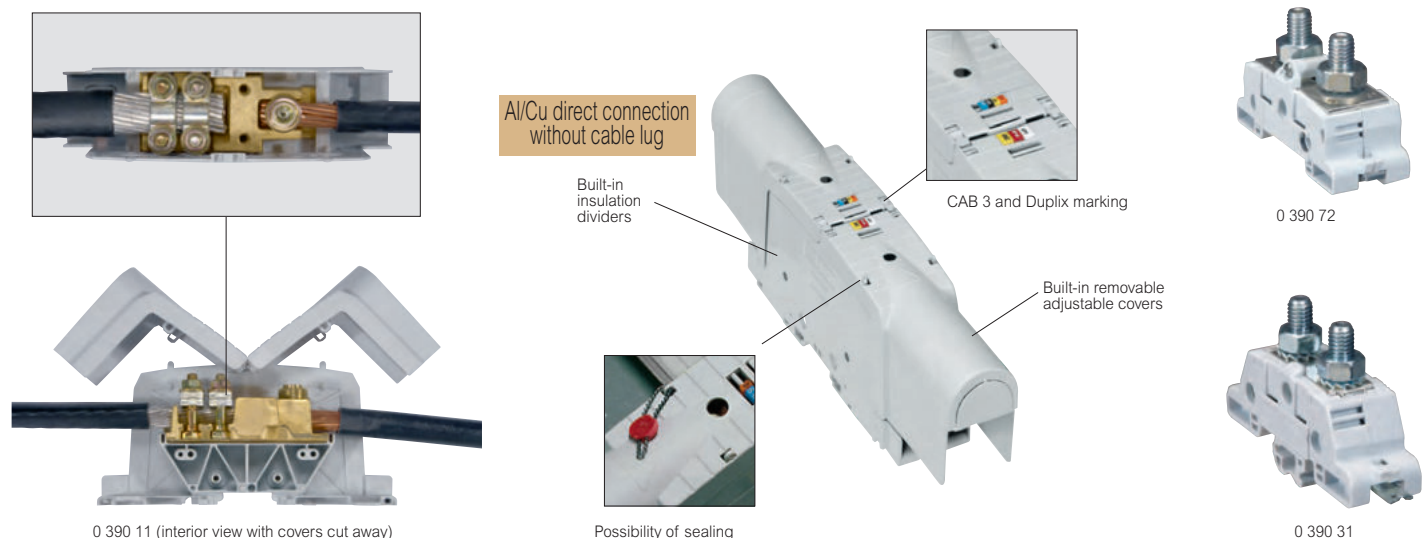

Technical characteristics p. 471

Bridging the gap between the enclosure and external cables

Pack	Cat.Nos	Insulated aluminium/copper power terminal blocks		
		For aluminium/copper cables, copper bars or cable lugs (see selection chart p. 471) Direct connection of cable Insulation and protection against direct contact without additional accessories (built-in dividers and covers) Pre-cut removable covers for adjustment to the various connection modes Fixed using metal clip for rails 15 mm depth and EN 60715 15 mm depth, or on plate with screws Permits the use of Cab 3, Duplix markers Test via test plug closed covers Blocks with identical pitch can be joined using a threaded rod Shunting possible with Cat.Nos 0 394 46/47		
		Cable - cable		
		Rigid or flexible cable (mm²)	Rigid or flexible cable (mm²)	Pitch (mm)
5	0 390 10	Al/Cu 35 to 120	Cu 35 to 70	42
5	0 390 11	Al/Cu 70 to 300	Cu 70 to 150	55
		Cable lug - cable lug		
		Max. connection (mm²)	Max. connection (mm²)	Pitch (mm)
5	0 390 13	Al/Cu 95	Al/Cu 95	36
5	0 390 14	Al/Cu 150	Al/Cu 150	42
5	0 390 15	Al/Cu 300	Al/Cu 300	55
		Cable lug - cable		
		Max. connection (mm²)	Rigid or flexible cable (mm²)	Pitch (mm)
5	0 390 17	Al/Cu 150	Cu 35 to 95	42
5	0 390 18	Al/Cu 300	Cu 70 to 150	55
		Cable - cable lug		
		Rigid or flexible cable (mm²)	Max. connection (mm²)	Pitch (mm)
5	0 390 20	Al/Cu 35 to 120	Al/Cu 120	42
5	0 390 21	Al/Cu 70 to 300	Al/Cu 300	55
		Equipotential bonding shunts		
		For insulated aluminium/copper power terminal blocks Supplied with screws		
5	0 394 46	For blocks with pitch 36 and 42 mm		
5	0 394 47	For blocks with pitch 55 mm		

Pack	Cat.Nos	Bare power terminal blocks		
		For copper bars or cable lugs Insulation dividers and protective covers to be ordered separately For use with terminal marker sheets (p. 474)		
		Cable lug - cable lug for symmetrical rails		
		Fixed using metal clip on rails 15 mm depth and EN 60715 15 mm depth		
		Connecting max. (mm²)	Pitch (mm)	
5	0 390 71	35	26	
5	0 390 72	70	34	
5	0 390 73	120	34	
5	0 390 74	240	46	
		Cable lug - cable lug for asymmetrical rails		
		Fixed using metal clip on rails EN 60715		
5	0 390 31	35	26	
5	0 390 32	70	34	
5	0 390 33	120	34	
5	0 390 34	240	46	
		Insulation and protection accessories		
		For bare power terminal blocks		
		Separation barriers		
		Take protective covers Marking possible with CAB 3 (p. 342)		
10	0 394 77	For blocks with pitch 26 mm		
10	0 394 78	For blocks with pitch 34 and 46 mm		
		Protective covers		
		For mounting on separation barriers		
5	0 394 86	For 3 blocks with pitch 46 mm or for 4 blocks with pitch 34 mm		
5	0 394 88	For 4 blocks with pitch 26 mm		
5	0 394 89	For 4 blocks with pitch 46 mm		



End stops
p. 462

Al/Cu distribution boxes
p. 303

CAB 3 marking system
p. 474