

Belanko™ S

hotel equipment



Belanko™ S

hotel equipment



6 176 12



6 176 37 + 5 720 78

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1-gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 176 12	16 A - 230 V~ - 50/60 Hz
1	6 177 12	Time delay of approx. 30 s after card removal
1	6 178 12 ¹	Use card with width max. 54 mm
		<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory



Pack	Cat.Nos	Hotel bedrooms call indicators
10	6 176 13	2 settings : Do not disturb / Please clean the room
10	6 177 13	Indicator for corridor
10	6 178 13 ¹	Installed in the corridor, displays calls
		<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory



Pack	Cat.Nos	Internal control unit
10	6 176 14	Installed in the room, allows the user to select the desired setting
10	6 177 14	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory
10	6 178 14 ¹	



Pack	Cat.Nos	Shaver sockets
1	6 176 18	Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz
1	6 177 18	Surface or flush-mounting, back box to be min.
1	6 178 18 ¹	47 mm deep. Spacer delivered to fit in standard box, deep 35 mm
		2-gang - vertical
		<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory



Pack	Cat.Nos	Security switch
1	6 176 19	1 A resistive - 250 V~
1	6 177 19	Panic button
1	6 178 19 ¹	<input type="radio"/> White <input type="radio"/> Anthracite <input type="radio"/> Ivory



Pack	Cat.Nos	Arteor adaptor
20	6 176 37	Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc
		1-gang
		<input type="radio"/> White




1: Available on request

For integration of Arteor functions, see **Arteor offer p. 558**



Guest Room Management System

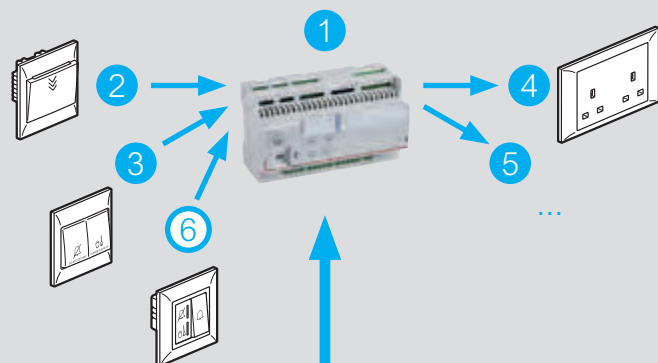

The Room Controller Unit, Cat.No 0 484 08 or 0 484 12, associated with mechanical Belanko™ S functions can manage the lights, sockets outlet, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.

For complementary information on the Room controller, please contact us

