


## outlet plates for floor boxes

power and data

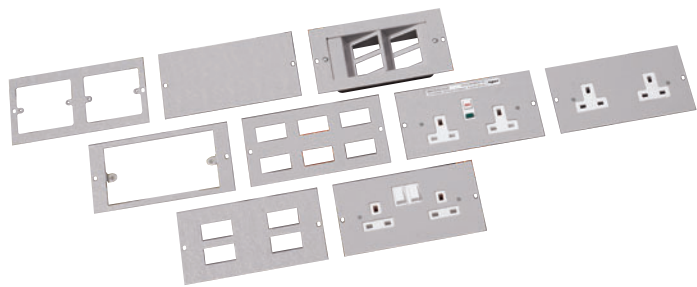

Cavity floor outlet boxes selection chart **p. 24-25**  
Dimensions and technical information **p. 28**  
Installation details **p. 29**

Plates to fit 1, 2 and 3 compartment boxes are all 100 mm wide  
Plates to fit 4 compartment boxes are 75 mm wide  
Non-standard sockets have a round earth pin  
Due to overall depth, RCD sockets and wave type data plates will NOT fit in the flush floor and shallow flush floor ranges (Cat. Nos. FFO/AFS)  
When using with underfloor duct systems (Cat. No. AFU) the outlet box must be raised by 8 mm from the lowest point to allow for wiring

Pack	Cat. Nos.		Power and data plates
	1, 2, 3 comp. 100 mm wide	4 comp. 75 mm wide	
			<b>13 A standard socket plates</b>
1	SP3201	SP4201	Twin switched
1	SP3200	SP4200	Twin unswitched
1	SP3211	SP4211	Twin switched – clean earth
1	SP3300	SP4300	Triple unswitched
1	SP3310	SP4310	Triple unswitched – clean earth
			<b>13 A non-standard socket plates</b>
1	SP3221	SP4221	Twin NS switched
1	SP3231	SP4231	Twin NS switched – clean earth
			<b>RCD socket plates</b>
			Double pole 30 mA passive will not trip in event of power failure. Eliminating need to manually reset all units after power failure
1	SP3202	SP4202	2 gang
1	SP3212	SP4212	2 gang – clean earth
			<b>Data plates</b>
1	SP3203	SP4203	37 x 22 mm – 2 cut-outs
1	SP3403	SP4403	37 x 22 mm – 4 cut-outs
1	SP3404	SP4404	37 x 22 mm – 4 cut-outs (wave plate)
1	SP3603	SP4603	37 x 22 mm – 6 cut-outs
1	SP3408	SP4408	47.5 x 23.5 mm – 4 cut-outs
			<b>General</b>
1	SP3205	-	2 x standard single outlet 60.3 mm
1	SP3105	-	Standard 2 gang outlet plate 120.6 mm
1	SP3106	SP4106	51 x 51 mm – 1 cut-out plate
1	SP3206	SP4206	51 x 51 mm – 2 cut-out plate
1	SP3000	SP4000	Blank plate
1	SP3107	SP4107	58 x 53.5 mm – 1 cut-out plate to accept Arteor mounting frame (Cat. No. 576016) <sup>1</sup>
1	SP3207	SP4207	58 x 53.5 mm – 2 cut-outs plate to accept 2 x Arteor mounting frames (Cat. No. 576016) <sup>1</sup>
50	SPSCREW		M3.5 x 6 spare socket plate screws

1: For Arteor mounting frames, refer to the latest Wiring Devices catalogue

## lids and trims for floor boxes



Cavity floor outlet boxes selection chart **p. 24-25**  
Dimensions and technical information **p. 28**  
Installation details **p. 29**

Moulded lids and trims are manufactured from durable ABS and feature a quick fit / release ratchet system  
ABS lid and trim versions are supplied with 6 mm carpet recess  
Metal lid and trim versions are supplied with 8 mm recess  
Stainless steel is satin finish as standard  
Brass is polished finish as standard

Pack	Cat. Nos.		Floor box lids and trims
	1 comp.	2 comp.	
			<b>1 and 2 compartment</b>
			<b>Carpet trim</b>
1	-	FBL2ABS	ABS
1	FBL1MCT	FBL2MCT	Metal – grey (RAL 7024)
1	FBL1SCT	FBL2SCT	Stainless steel (Satin)
1	FBL1BCT	FBL2BCT	Brass (Polished)
			<b>Edge trim</b>
1	-	FBL2COM	ABS lid/metal trim (ABS/grey)
1	FBL1MET	FBL2MET	Metal – grey (RAL 7024)
1	FBL1SET	FBL2SET	Stainless steel (Satin)
1	FBL1BET	FBL2BET	Brass (Polished)
			<b>3 and 4 compartment</b>
			<b>Carpet trim</b>
1	-	FBL3ABS	ABS
1	FBL3MCT	FBL3MCT	Metal – grey (RAL 7024)
1	FBL3SCT	FBL3SCT	Stainless steel (Satin)
1	FBL3BCT	FBL3BCT	Brass (Polished)
			<b>Edge trim</b>
1	-	FBL3COM	ABS lid/metal trim (ABS/grey)
1	FBL3MET	FBL3MET	Metal – grey (RAL 7024)
1	FBL3SET	FBL3SET	Stainless steel (Satin)
1	FBL3BET	FBL3BET	Brass (Polished)

Metal lids and trims can be powder coated to any RAL reference. Other options, such as lockable lids, are available to special order

**Contact us on +44 (0) 370 608 9020**

