Plexo weatherproof boxes

increased depth PVC range (continued)

Dimensions (mm)

Cat. No. 0922 84

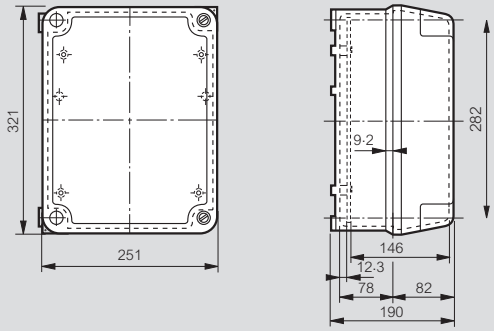

Fixing dimensions



Mounting plates for PVC boxes

Cat. No. 0350 90



Cat. No. 0350 92



Cat. No. 0350 93



Cat. No. 0350 94



Nylbloc™ terminal strips and line taps

0 340 33 | 0 340 42 | 0 340 45

Nylbloc terminal strips

According to EN 60998-2-1, the rated insulation voltage of Nylbloc terminal strips is 250 V
They may be used under 400 V nominal voltage supply when integrated in equipment designed according to EN 60664-1 with pollution degree 2 and overvoltage category III
12 way strips with captive screws
Supplied with screws undone
Flame retardant polypropylene (–25 °C to +100 °C)
Ambient temperature from –25 °C to +55 °C

Pack	Cat. Nos.	Rated capacity (mm^2)	Diameter Ø	Current max. (A)	Dimensions (mm)
	Black				
10	0342 11	2·5	2·5	24	15·6 x 94 x 12·3
10	0342 13	6	3·5	41	18 x 107 x 14·7
10	0342 15	10	4·5	57	20·8 x 136 x 17·4
10	0342 17	16	5·5	76	24·2 x 157 x 22·6
10	0342 19	25	7	101	33·2 x 214 x 27·8
	White				
10	0342 21	2·5	2·5	24	15·6 x 94 x 12·3
10	0342 23	6	3·5	41	18 x 107 x 14·7
10	0342 25	10	4·5	57	20·8 x 136 x 17·4
10	0342 27	16	5·5	76	24·2 x 157 x 22·6

Line taps

Strip of 10 separable line taps

Pack	Cat. Nos.	Capacity per tap (mm^2)	Width (mm)
	With feet		
10	0340 00	2 x 6	15
10	0340 01	2 x 10	19.5
10	0340 02	2 x 16	21
10	0340 03	2 x 25	21.5
10	0340 04	2 x 35	25
	Without feet		
10	0340 30	2 x 6	15
10	0340 31	2 x 10	19.5
10	0340 32	2 x 16	21

Non-shear line taps

Hexagonal head

Pack	Cat. Nos.	Capacity per tap (mm^2)	Width of slot (max. cable Ø in mm)	Overall height (mm)	Fixing centres (mm)
	Without feet				
20	0340 33	2 x 25	7.4	49	33
10	0340 34	2 x 50	9.5	59	44
	With feet				
20	0340 41	2 x 10			
20	0340 42	2 x 18	5.8	41	37
20	0340 43	2 x 30	7.4	49	37
10	0340 44	2 x 50	9.5	59	44
10	0340 45	2 x 75	11.7	71	62

Plexo weatherproof boxes **p. 34-38**