


# P 17 Tempra Pro IP 44 - LV 16 and 32 A

sockets, plugs, mobile sockets, appliance inlets and protection covers

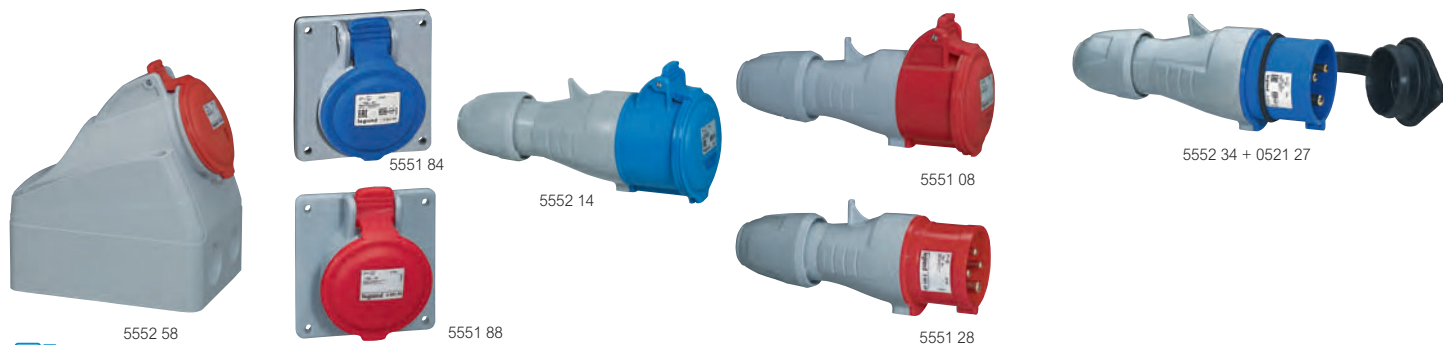

Technical information and dimensions p. 110-111

## Surface mounting sockets

Two possible angles (5° or 25°)

Pack	Cat. Nos.		100/130 V~
5	16 A	32 A	2 P + ⊥
5	5551 51	5552 51	3 P + ⊥
	5551 52	-	
10   5	5551 54	5552 54	2 P + ⊥
5	5551 55	5552 55	3 P + ⊥
5	5551 56	5552 56	3 P + N + ⊥
			380/415 V~
5	5551 57	5552 57	2 P + ⊥
10	5551 58	5552 58	3 P + ⊥
10	5551 59	5552 59	3 P + N + ⊥

## Panel mounting sockets inclined outlet

Can be fixed on plain faceplates or pre-drilled (p. 18)

Pack	Cat. Nos.		100/130 V~
5	16 A	32 A	2 P + ⊥
	5551 81	5552 81	
10	5551 84	5552 84	2 P + ⊥
5	5551 85	5552 85	3 P + ⊥
5	5551 86	5552 86	3 P + N + ⊥
			380/415 V~
10	5551 88	5552 88	3 P + ⊥
10	5551 89	5552 89	3 P + N + ⊥

## Panel mounting sockets straight outlet small flange

Can be fixed only on plain faceplates Cat. No. 0577 15 (p. 18)

Pack	Cat. Nos.		200/250 V~
5	0573 54	0580 54	2 P + ⊥
			380/415 V~
5	0573 58	0580 58	3 P + ⊥
5	0573 59	0580 59	3 P + N + ⊥

## Mobile sockets

Cable clamping and closing without screws Supplied unlocked

Pack	Cat. Nos.		100/130 V~
10   5	16 A	32 A	2 P + ⊥
5	5551 01	5552 11	3 P + ⊥
	5551 02	-	
			200/250 V~
10	5551 04	5552 14	2 P + ⊥
5	5551 05	5552 15	3 P + ⊥
5	5551 06	5552 16	3 P + N + ⊥

## Adaptor – 16 A - 230 V

10	0521 01	2 P + ⊥ plug 13 A 2 P + ⊥ BS socket
----	---------	--

## Mobile sockets (continued)

Cable clamping and closing without screws Supplied unlocked

Pack	Cat. Nos.		380/415 V~
5	16 A	32 A	2 P + ⊥
10	5551 07	5552 17	3 P + ⊥
10	5551 08	5552 18	3 P + N + ⊥
	5551 09	5552 19	

## Straight plugs

Cable clamping and closing without screws Supplied unlocked

Pack	Cat. Nos.		100/130 V~
10   5	16 A	32 A	2 P + ⊥
5	5551 21	5552 31	3 P + ⊥
	5551 22	-	
			200/250 V~
10	5551 24	5552 34	2 P + ⊥
5	5551 25	5552 35	3 P + ⊥
5	5551 26	5552 36	3 P + N + ⊥
			380/415 V~
5	5551 27	5552 37	2 P + ⊥
10	5551 28	5552 38	3 P + ⊥
10	5551 29	5552 39	3 P + N + ⊥

## Appliance inlets

Can be used with protective covers, see below. Supplied separately

Pack	Cat. Nos.		200/250 V~
5	0575 84	0582 84	2 P + ⊥
			380/415 V~
5	0575 88	0582 88	3 P + ⊥
5	0575 89	0582 89	3 P + N + ⊥

## Protection covers

IP 67  
IP 44 maintained with plug inserted

Pack	Cat. Nos.		For plugs and appliance inlets:
	Rubber		2 P + ⊥ - 16 A
10	0521 25		3 P + ⊥ - 16 A
5	0521 26		3 P + N + ⊥ - 16 A / 2 P + ⊥ and
5	0521 27		3 P + ⊥ - 32 A
5	0527 99		3 P + N + ⊥ - 32 A