


cylindrical cartridge fuses

HRC (continued)

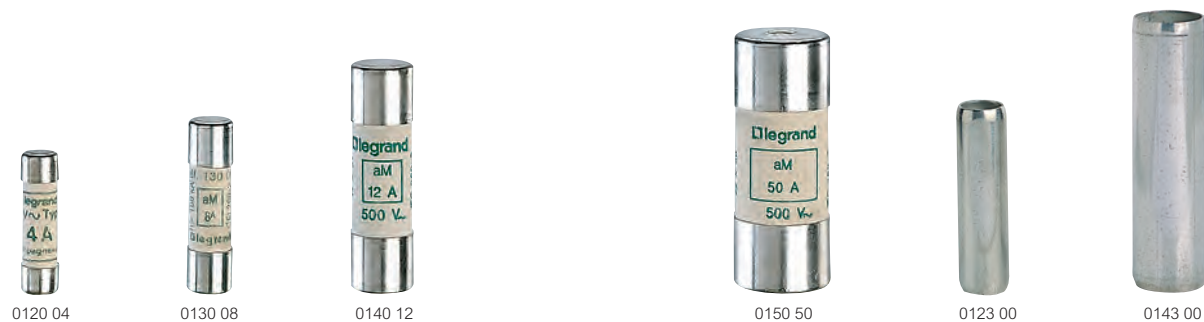

Dimensions p. 25

Numbers refer to physical size of fuse i.e. 10 x 38 means Ø 10 mm x 38 mm length

Pack	Cat. Nos.	Cylindrical type aM (motor rated)		
		Conform to BS EN 60269-1 (BS 88) IEC 60269-1 Bureau Veritas approved		
		Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	Without indicator	8 x 32		
10	0120 02	2	400	20 000
10	0120 04	4		
10	0120 06	6		
10	0120 10	10		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 and IEC 60269-1, 2 and 2-1 Bureau Veritas approved		
	Without indicator	10 x 38 HRC		
10	0130 95	0.5	500	100 000
10	0130 01	1		
10	0130 02	2		
10	0130 04	4		
10	0130 06	6		
10	0130 08	8		
10	0130 10	10		
10	0130 12	12		
10	0130 16	16		
10	0130 20 ¹	20		
10	0130 25 ¹	25	400	
	Without striker	14 x 51 HRC		
10	0140 04	4	500	100 000
10	0140 06	6		
10	0140 10	10		
10	0140 12	12		
10	0140 16	16		
10	0140 20	20		
10	0140 25	25		
10	0140 32	32		
10	0140 40	40		
10	0140 45 ²	45		
10	0140 50 ²	50	400	

Pack	Cat. Nos.	Cylindrical type aM (motor rated) (continued)		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 (BS 88) IEC 60269-1, 2 and 2-1 Bureau Veritas approved		
		Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	Without striker	22 x 58 HRC		
10	0150 32	32	500	100 000
10	0150 40	40		
10	0150 50	50		
10	0150 63	63		
10	0150 80	80		
10	0150 96	100		
10	0150 97 ²	125	400	
		Neutral links		
10	0123 00	8 x 32		
10	0133 00	10 x 38		
10	0143 00	14 x 51		
10	0153 00	22 x 58		

1 : Overrating not described by standards
2 : Overrating described by standards