

LB PLUS trunking components




75201003



75161001



75201004

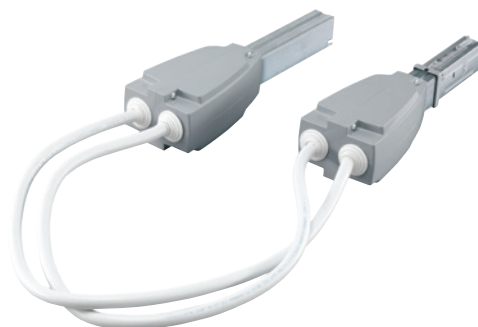

75221263



Selection chart **p. 6-7**

Technical data **p. 12-13**

Dimensions and technical information **p. 16-17**

Pack	Cat. Nos.	End feed units																							
		<p>Allow electrical powering of the LB PLUS busbar With terminals for the connection of stranded or solid copper wire cables Delivered with corresponding cable glands</p> <p>Right hand feed units (reduced dimensions) Supplied complete with corresponding end cover Cable terminal capacity 6 mm² to 25 mm² Max. cable Ø 32 mm</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25 / 40 A – 2 / 4 conductor version</td> <td>0.80</td> </tr> <tr> <td>25 / 40 A – 6 / 8 conductor version</td> <td>0.90</td> </tr> <tr> <td>63 A – 4 conductor version</td> <td>0.80</td> </tr> </tbody> </table> <p>Left hand feed units (reduced dimensions) Supplied complete with corresponding end cover Cable terminal capacity 6 mm² to 25 mm² Max. cable Ø 32 mm</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25 / 40 A – 2 / 4 conductor version</td> <td>1.00</td> </tr> <tr> <td>25 / 40 A – 6 / 8 conductor version</td> <td>1.20</td> </tr> <tr> <td>63 A – 4 conductor version</td> <td>1.10</td> </tr> </tbody> </table> <p>Fast fit feed unit Supplied complete with corresponding end cover Cable terminal capacity up to 6 mm² Cable Ø from 12 mm to 18 mm</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25 A – 2 / 4 conductor version RH</td> <td>0.45</td> </tr> <tr> <td>25 A – 2 / 4 conductor version LH</td> <td>0.85</td> </tr> </tbody> </table>		Type	Weight (kg)	25 / 40 A – 2 / 4 conductor version	0.80	25 / 40 A – 6 / 8 conductor version	0.90	63 A – 4 conductor version	0.80	Type	Weight (kg)	25 / 40 A – 2 / 4 conductor version	1.00	25 / 40 A – 6 / 8 conductor version	1.20	63 A – 4 conductor version	1.10	Type	Weight (kg)	25 A – 2 / 4 conductor version RH	0.45	25 A – 2 / 4 conductor version LH	0.85
Type	Weight (kg)																								
25 / 40 A – 2 / 4 conductor version	0.80																								
25 / 40 A – 6 / 8 conductor version	0.90																								
63 A – 4 conductor version	0.80																								
Type	Weight (kg)																								
25 / 40 A – 2 / 4 conductor version	1.00																								
25 / 40 A – 6 / 8 conductor version	1.20																								
63 A – 4 conductor version	1.10																								
Type	Weight (kg)																								
25 A – 2 / 4 conductor version RH	0.45																								
25 A – 2 / 4 conductor version LH	0.85																								
1	75201003																								
1	75221003																								
1	75241003																								
1	75201004																								
1	75221004																								
1	75241004																								
1	75161001																								
1	75161002																								

Pack	Cat. Nos.	Centre feed units									
		<p>Centre feed units can be used to power the busbar from an intermediate point of the line, reducing the voltage drop at the end of the line and/or facilitating the installation when the power supply point is near the centre of the line</p> <p>Complete with all internal wiring One set of terminals feeds both left hand and right hand feed sections Supplied with both end caps</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25 / 40 A – 2 / 4 conductor version</td> <td>3.70</td> </tr> <tr> <td>25 / 40 A – 6 / 8 conductor version</td> <td>4.40</td> </tr> <tr> <td>63 A – 4 conductor version</td> <td>2.70</td> </tr> </tbody> </table>		Type	Weight (kg)	25 / 40 A – 2 / 4 conductor version	3.70	25 / 40 A – 6 / 8 conductor version	4.40	63 A – 4 conductor version	2.70
Type	Weight (kg)										
25 / 40 A – 2 / 4 conductor version	3.70										
25 / 40 A – 6 / 8 conductor version	4.40										
63 A – 4 conductor version	2.70										
1	75201151										
1	75221151										
1	75241151										
		<p>Flexible joints (reduced dimensions) Consists of a right hand and left hand unit Used to change direction, change level or overcome obstructions Flexible cable length : 940 mm</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>25 / 40 A – 2 / 4 conductor version</td> <td>2.00</td> </tr> <tr> <td>25 / 40 A – 6 / 8 conductor version</td> <td>3.10</td> </tr> <tr> <td>63 A – 4 conductor version</td> <td>2.50</td> </tr> </tbody> </table>		Type	Weight (kg)	25 / 40 A – 2 / 4 conductor version	2.00	25 / 40 A – 6 / 8 conductor version	3.10	63 A – 4 conductor version	2.50
Type	Weight (kg)										
25 / 40 A – 2 / 4 conductor version	2.00										
25 / 40 A – 6 / 8 conductor version	3.10										
63 A – 4 conductor version	2.50										
1	75201263										
1	75221263										
1	75241263										