


# MS double sided busbar

## trunking components



51500361

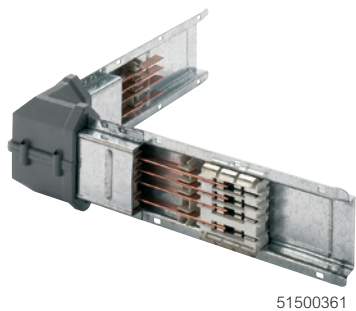

51500461



51511151



Dimensions and technical information p. 24-25

Conforms to BS EN 61439-6. Casing manufactured from Senzimir quality galvanised steel suitable for use as a protective earth IP 40 as standard, increasing to IP 55 with use of appropriate accessories

Pack	Cat. Nos.	Trunking components	Pack	Cat. Nos.	Trunking components (continued)																		
1	51530351	For changing the route of trunking, either horizontally or vertically <b>Horizontal elbows – right hand</b> Right and left elbows differ because of the position of junction blocks <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51530561	<b>Left hand tee – female</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79		
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
63	2.29																						
100	2.29																						
160	3.79																						
1	51500361	<b>Horizontal elbows – left hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51500562	<b>Left hand tee – male</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79		
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
63	2.29																						
100	2.29																						
160	3.79																						
1	51520351	<b>Vertical elbows – right hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.7</td> </tr> <tr> <td>160</td> <td>2.7</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.7	160	2.7	1	51520561	<b>Crossovers</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79		
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.7																						
160	2.7																						
Rating (A)	Weight (kg)																						
63	2.29																						
100	2.29																						
160	3.79																						
1	51530451	<b>Vertical elbows – left hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51530651	<b>Flexible elbow</b> For horizontal and vertical changes of direction up to 90° Not available for 160 A rating <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63-100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63-100	2.29	160	3.79				
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
63-100	2.29																						
160	3.79																						
1	51500461	<b>Right hand tees – male</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79	1	51500661	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	2.29																						
100	2.29																						
160	3.79																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						
1	51520451	<b>Right hand tees – female</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79	1	51520651	<b>Centre feed units IP 55</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63-100</td> <td>3.5</td> </tr> <tr> <td>160</td> <td>5.0</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63-100	3.5	160	5.0				
Rating (A)	Weight (kg)																						
63	2.29																						
100	2.29																						
160	3.79																						
Rating (A)	Weight (kg)																						
63-100	3.5																						
160	5.0																						
1	51530461	<b>Horizontal elbows – right hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51511261	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						
1	51500462	<b>Horizontal elbows – left hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51521261	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						
1	51520461	<b>Vertical elbows – right hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.7</td> </tr> <tr> <td>160</td> <td>2.7</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.7	160	2.7	1	51511151	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.7																						
160	2.7																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						
1	51500461	<b>Vertical elbows – left hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51521151	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						
1	51520461	<b>Horizontal elbows – right hand</b> <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6	1	51521151	<b>Feed units</b> <b>End feed units IP 55</b> IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables Switched-end feed units are also available with in-line bus switches on request <table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360
Rating (A)	Weight (kg)																						
63	1.6																						
100	1.6																						
160	2.6																						
Rating (A)	Weight (kg)																						
Right 63-100	1.732																						
Left 63-100	1.874																						
Right 160	2.218																						
Left 160	2.360																						