


Myrius NEXTGEN™
Ref . No. :679361/ 679376
Connected curtain/roller blind switch wired, 1 module with Nutral
Date : 06-10-2021
Rev.1


Note : This product is a connected accessory which requires you to install the "Legrand connected (IoT) range" connected starter pack first.

1. USE

For local or remote control of a roller shutter/curtains.
Can be combined with one or more wireless roller shutter controls, curtains.
Caution: Must be connected to the neutral.
Not compatible with radio-controlled roller shutter motors.

2.Type


IoT Connected curtain/roller blind switch wired
No. of modules : 1
Colour : White / Charcoal Grey
Mounting : Flush box and Surface box - mounted

3.OVERALL DIMENSIONS

Width : 22.5 mm
Height : 45 mm
Depth : 44.5 mm
Weight (g) : 34

4.CONNECTION

Terminal : terminal with screws

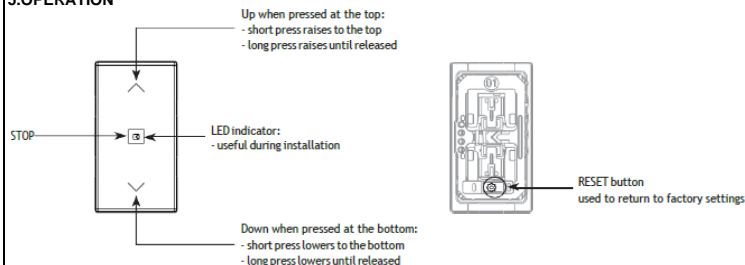5.OPERATION


* Refer product instruction sheet

6.TECHNICAL CHARACTERISTICS
6.1 Material Characteristics

Rocker : Acrylonitrile Butadiene Styrene (ABS)
Base : Polycarbonate
Mechanism : Electronic
850° C / 30 s for insulating parts holding live parts in place.
650° C / 30 s for the other insulating components.

6.2 Electricals Characteristics

Voltage: 100/240 V~
Current: 2 A
Frequency: 50/60 Hz
Power: 500 W bulb
Standby consumption: 0.1 mA
Zigbee technology 2.4 GHz to 2.4835 GHz
Power level: < 100 mW
Range: 200 m of unobstructed space 10 m between products

+ 45° C + 5° C	1 x 2.5 mm ² 2 x 1.5 mm ²	Rolling shutter motor
100-240 VAC 50 Hz		
240 VAC max.	1 x 500 VA	
100 VAC max.	1 x 270 VA	

6.3 Climate characteristics

Storage temperature: 0° C to + 45° C
Usage temperature: +5° C to + 45° C

7.CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products

8.CONFORMITY - APPROVALS

Equipment Type Approval (ETA) through self-declaration issued under O.M. No. ETA-WPC /Policy/2018-19 dated 26 February, 2019