


EBDHS-DD-LT30 | DALI/DSI digital dimming, low temp, IP65, high bay/high level, flush mounted, PIR, presence/absence detector

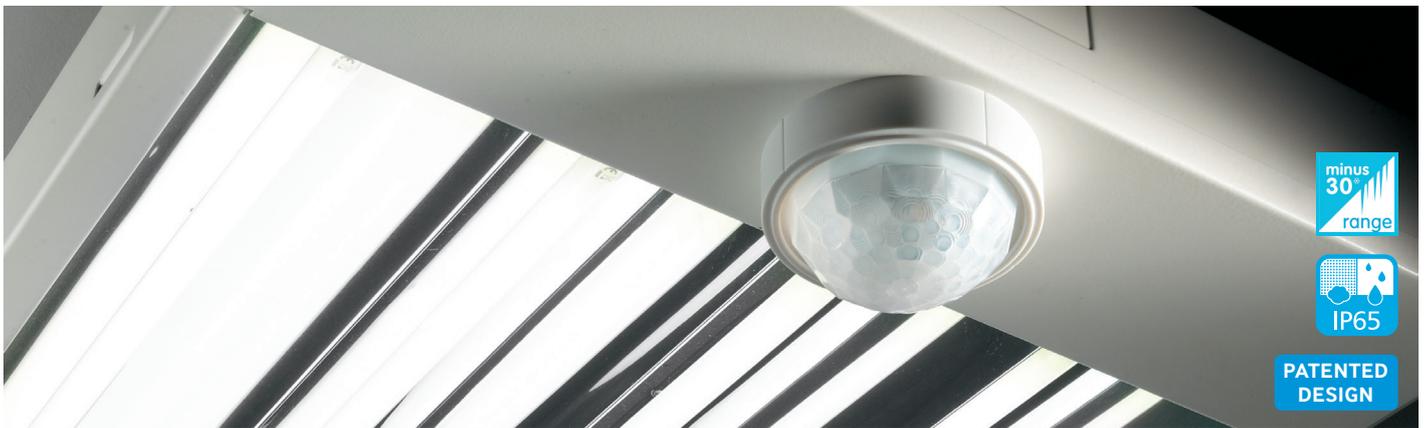


The EBDHS-AD-LT30 PIR presence detector is developed for lighting control in areas with demanding spaces and increased mounting heights.

Key Product Features:


- Groundbreaking detection range
- For mounting at heights up to 20m depending on operating parameters
- Operating temperature range -30°C to 35°C
- IP65 rated
- Unique lens technology – high sensitivity
- Ideal for cold storage warehousing lighting control
- Supplied with adjustable masking shields to tailor detection zones
- Verify feature – reduces false triggering by ensuring detection from more than one of the internal sensors
- Compatible with the UHS5 or UNLCDHS handsets for easy programming
- 5 year warranty

Detection pattern

high < sensitivity > low

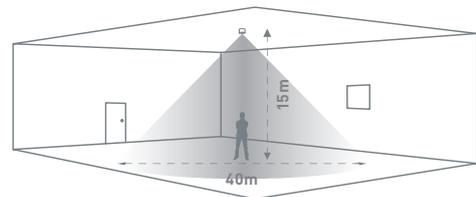

Dimensions (mm)

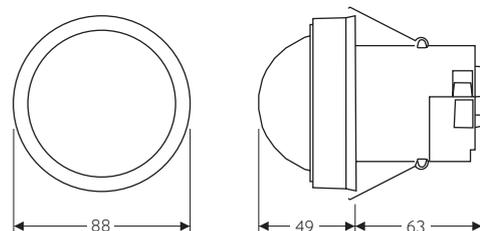

Technical Data

Part Code	EBDHS-DD-LT30
Control method	DALI/DSI Digital Dimming
IP rating	65
Device/ballast control	up to 20 drivers/ballasts
Weight (kg)	0.200
Supply voltage AC	230 VAC +/- 10%
Supply Frequency (Hz)	
Power consumption parasitic mW	299mW
Terminal capacity	2.5mm ²
Maximum loads	
Incandescent lighting (INC)	
Fluorescent lighting (F)	
Compact fluorescent lighting (CF)	
LED lighting (LED)	
Resistive heaters (RH)	
Fans & ventilation equipment (F&V)	
Working temperature range °C	-30 to 35
Humidity	5 to 95% non-condensing
Material (casing)	Flame retardant ABS and PC/ABS
Insulation class	Class 2
Compliance	EMC-2014/30/EU, LVD-2014/35/EU
Time out range	10s–99m
Cutout diameter	64mm

Accessories and Associated Products

Part Number	Description
 DBB	Surface mounting box
 DBB-EXT	Surface mount back box extender
 EBD-ENCIP1	Pre-drilled 64mm hole IP65 detector enclosure
 EXD-HSC	Extended wiring housing
 UHS5	Compact, programming/commissioning handset
 UHS7	Compact, user handset
 UNLCDHS	Universal LCD IR handset/commissioning handset

Key Functionality Features:

- Switching/Dimming with Lux Level Sensing
- Programmable via our programming handset
- Absence detection functionality
- User handset available to control on/off and lux levels
- Step-down illuminance
- Maintained Illuminance (daylight linking or daylight harvesting)
- Suitable for all lighting types
- Two channel flexibility
- Scene setting and recall
- Lamp burn-in
- User handset available to control on/off, lux levels and preset scenes.

	<p>CP Electronics A Business unit of Legrand Electric Limited, Brent Crescent, London NW10 7XR, UK t. +44 (0)333 900 0671 info@cpelectronics.co.uk</p>	<p>Important notice: This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and the applicable Building Regulations. Due to our policy of continual product improvement CP Electronics reserves the right to alter the specification of this product without prior notice.</p>	
	<p>www.cpelectronics.co.uk</p>		

