


Optic fibre cable OM2 - 900 µm tight tube indoor/outdoor

- 2 fibres Cat. No(s): 0 324 73
- 8 fibres Cat. No(s): 0 324 75

- 6 fibres Cat. No(s): 0 325 08
- 12 fibres Cat. No(s): 0 325 09

- 4 fibres Cat. No(s): 0 325 55

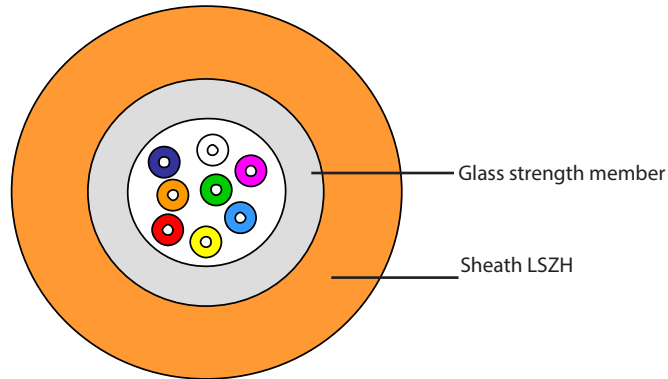

1. APPLICATION AND INSTALLATION

This distribution or mini-break-out cable can be used for many indoor applications and limited outdoor applications. The cable features improved tight buffer. Glass yarns provide a degree of rodent protection. Typical cable applications include: LAN and WAN backbones, central office interconnectors, backbones in data centres, and many other. The cable is suited for installation in ducts and on trays. The cable features an UV stabilised, water-blocked, LSZH sheathing, the cable is suited for indoor and outdoor (ducts) runs.

2. CABLE TECHNICAL SPECIFICATIONS

2.1 Standards

EN 187 000
IEC 60794-2
IEC 60794-2-20
ISO 11801 2nd edition
EN 50173-1

2.2 Construction

Fibre	2-24 tightly buffered fibres 900µm ± 50 µm	
	1 Red	13 Yellow w/mark every 70 mm
	2 Green	14 White w/mark every 70 mm
	3 Blue	15 Grey w/mark every 70 mm
	4 Yellow	16 Turquoise w/mark every 70 mm
	5 White	17 Orange w/mark every 70 mm
	6 Grey	18 Pink w/mark every 70 mm
	7 Brown	19 Yellow w/mark every 35 mm
	8 Violet	20 White w/mark every 35 mm
	9 Turquoise	21 Grey w/mark every 35 mm
	10 Black	22 Turquoise w/mark every 35 mm
	11 Orange	23 Orange w/mark every 35 mm
	12 Pink	24 Pink w/mark every 35 mm
Strength member	Glass yarns as strength members and rodent protection	
Water blocking	Swellable tread and tape	
Sheath	Halogen free, flame retardant, UV stabilized - Colour : Orange Ral 2009	

Optic fibre cable OM2 - 900 µm tight tube indoor/outdoor

- 2 fibres Cat. No(s): 0 324 73

- 6 fibres Cat. No(s): 0 325 08

- 8 fibres Cat. No(s): 0 324 75

- 12 fibres Cat. No(s): 0 325 09

- 4 fibres Cat. No(s): 0 325 55

2.3 Fire rating

IEC 60332-1-2	Single vertical wire test
IEC 60332-3-24	Vertical flame spread of vertically-mounted bunched wires or cables
IEC 60754-1	No halogens
IEC 60754-2	No acid matters
IEC 61034	No dense smoke
EN 50399	Class Dca s2, d2, a1 (cable marking) ; also compliant with class Eca

2.4 PHYSICAL PROPERTIES- IEC 60794-1-21/22

Property	IEC 60794-1-21/22 Method	Value
Nominal diameter	-	2 fibres : 6.0 mm 4 and 6 fibres : 6.5 mm 8 fibres : 7.0 mm 12 fibres : 7.5 mm 16 fibres : 8.0 mm 24 fibres : 8.5 mm
Nominal cable weight	-	2 fibres : 32 kg/km 4 fibres : 34 kg/km 6 fibres : 36 kg/km 8 fibres : 39 kg/km 12 fibres : 43 kg/km 16 fibres : 52 kg/km 24 fibres : 63 kg/km
Permanent tensile strength	E1	2, 4, 6, 8 and 12 fibres : 500 N 16 fibres : 1000 N 24 fibres : 1500 N
Short term tensile strength (some days)	E1	2, 4, 6, 8 and 12 fibres : 1000 N 16 fibres : 1400 N 24 fibres : 1600 N
Maximum installation load (a few hours)	-	2, 4, 6, 8 and 12 fibres : 1500 N 16 fibres : 2100 N 24 fibres : 2400 N
Impact	E4	20 J
Crush (compressive strength)	E3	2, 4, 6, 8 and 12 fibres : 2000 N/100 mm 16 and 24 fibres : 1000 N/100 mm
Torsion	E7	5 cycles ± 1 turn
Minimum bending radius of tightly buffered fibres	G1	With OS2 G.657.A1 fibre: 7.5mm With OMx fibres : 7.5mm
Minimum bending radius	E11	2, 4, 6 and 8 fibres : 50mm 12 and 16 fibres : 75mm 24 fibres : 115mm
Minimum bending radius under tension	E18A	2, 4, 6 and 8 fibres : 100mm 12 and 16 fibres : 130mm 24 fibres : 230mm
Temperature range	F1	Operation and installation : -20 °C to + 60°C Storage : -40 °C to + 70 °C

2.5 Marking and packaging

Marking of the cable :

- Legrand
- Part number
- Description
- Euroclass : Dca s2, d2, a1
- Date code
- Batch number
- Measurement (remaining length in meters)

Catalogue number	0 324 73	0 324 75	0 325 08	0 325 09	0 325 55
Description	2 fibres OM2 TB In/Out LSZH	8 fibres OM2 TB In/Out LSZH	6 fibres OM2 TB In/Out LSZH	12 fibres OM2 TB In/Out LSZH	4 fibres OM2 TB In/Out LSZH
Colour	Orange Ral 2009	Orange ral 2009	Orange ral 2009	Orange Ral 2009	Orange Ral 2009
Puck (m)	2000	2000	2000	2000	2000
Packaging	Reel	Reel	Reel	Reel	Reel

Optic fibre cable OM2 - 900 µm tight tube indoor/outdoor

- 2 fibres Cat. No(s): 0 324 73

- 6 fibres Cat. No(s): 0 325 08

- 8 fibres Cat. No(s): 0 324 75

- 12 fibres Cat. No(s): 0 325 09

- 4 fibres Cat. No(s): 0 325 55

3. FIBRES TECHNICAL SPECIFICATIONS

3.1 Standards and norms

IEC 60793-2-10 category A1a

EN 60793-2-10: type A1a

ITU Recommendation G.651

TIA/EIA-492 AAAB

EN 50 173:2007 category OM2

ISO/IEC 11801:2002 category OM2.

IEEE 802.3-2002. with amendment 802.3ae - 2002.

ANSI/TIA/EIA-568.B.3 - 2000

3.2 Attenuation (of cable with fibres) - IEC 60793-1-40

Maximum at 850 nm	≤ 2.7 dB/km
Maximum at 1300 nm	≤ 0.8 dB/km
Typical value at 850 nm	≤ 2.5 dB/km
Typical value at 1300 nm	≤ 0.6 dB/km
Inhomogeneity of OTDR trace for any two 1000 meter fibre lengths	Max. 0.1 dB/km

Fibre bending loss R=7.5 mm 850/1300 nm	≤ 0.2 dB / ≤ 0.5 dB
Fibre bending loss R=15 mm 850/1300 nm	≤ 0.1 dB / ≤ 0.3 dB

3.3 Bandwidth - IEC 60793-1-41

Overfilled (OFL) modal bandwidth at 850 nm	≥ 500 MHz·km
Overfilled (OFL) modal bandwidth at 1300 nm	≥ 500 MHz·km
Group index of refraction at 850 nm	1.482
Group index of refraction at 1300 nm	1.477

3.4 Fibre properties according to IEC - IEC 60793-1

Attribute	Measurement method	Units	Limits
Core diameter	IEC/EN 60793-1-20	µm	50 ± 2.0
Cladding diameter	IEC/EN 60793-1-20	µm	125 ± 1
Cladding non-circularity	IEC/EN 60793-1-20	%	≤ 1.0
Core non-circularity	IEC/EN 60793-1-20	%	≤ 5
Core-cladding concentricity error	IEC/EN 60793-1-20	µm	≤ 1.5
Primary coating diameter - uncoloured	IEC/EN 60793-1-21	µm	242 ± 0.5
Primary coating diameter - coloured	IEC/EN 60793-1-21	µm	250 ± 15
Primary coating non-circularity	IEC/EN 60793-1-21	%	≤ 5
Primary coating-cladding concentricity error	IEC/EN 60793-1-21	µm	≤ 6
Proof stress level	IEC/EN 60793-1-30	GPa	≥ 0.7 (≈1%)
Typical average stripforce	IEC/EN 60793-1-32	N	1.7
Strip force (peak)	IEC/EN 60793-1-32	N	1.3 ≤ F _{peak,strip} ≤ 8.9
Numerical aperture	IEC/EN 60793-1-43		0.200 ± 0.015