



## LIVING LIGHT Badge holder pocket

Cat. No(s): N4547 - NT4547 - L4547 - LN4548 - LN4549



LN4549






L/N/NT4547

### 1. USE

Badge holder pocket for hotel room.


### 2. RANGE

	Badge holder pocket for the power supply inside the hotel room - Slot light with built-in lamp. 30 second switch-off delay - Power supply 230 Vac 2 modules - To be completed with front cover in the desired look.	<input type="radio"/> LN4549
	Badge holder pocket for the power supply inside the hotel room with RFID technologie redognition. Slot light with built-in lamp. 30 second switch-off delay - Power supply 230 Vac 2 modules - To be completed with front cover in the desired look.	<input type="radio"/> LN4548
	Front cover for traditional or My Home badge-holder pocket. The installation is compatible with 2 module boxes only.	<input type="checkbox"/> N4547 <input type="checkbox"/> NT4547 <input type="checkbox"/> L4547

#### Color code:

- White
- Tech
- Anthracite
- Neutral

### 3. OVERALL DIMENSIONS (mm)

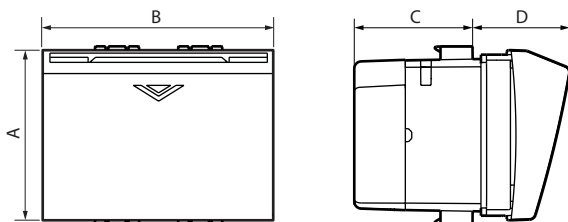

Cat. No.	A	B	C	D
LN4549 + N4547	45	60.8	31.3	25.7
LN4548 + N4547	45	60.8	31.3	25.7

### 4. CONNECTION

Screw clamps.

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Protection index

Penetration by solid bodies/liquids: IP 21 D  
Impact test: IK 04

#### ■ 5.2 Material characteristics

Material:

- Mechanism case: Polycarbonate
- Key cover: ABS

Halogen free.

UV resistant.

Self extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 VAC

#### ■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e.catalogue.