

**63A energy meter,  
direct connection**

Cat. N°: 4 120 90 – 4 120 91



Contents	Pages
1. Use .....	1
2. Range .....	1
3. Installation .....	1
4. Dimensions .....	1
5. Connections .....	2
6. Operating data .....	2
7. General features .....	3
8. Conformity and certifications .....	6
9. Communication .....	7

**1. USE**

Three-phase active and reactive energy meter with direct connection. The device, in 4 DIN modules, is self-powered and is equipped with ModBus communication or pulse output and double tariff input.


**2. RANGE**

Code Art.	Model	Connection	Weight
4 120 90	Pulse	Screw terminals	0,210Kg
4 120 91	Double tariff ModBus		

**3. INSTALLATION**

**Fixing:**

On EN/IEC 60715 symmetric rail or DIN 35 rail.



**Necessary tools:**

For fastening the device on the DIN rail: 5.5 mm flat screwdriver (from 4 to 6 mm).


**Operating position:**

Vertical, Horizontal, Upside down, On the side



**4. DIMENSIONS**

**Housing:** 4 DIN43880 modules

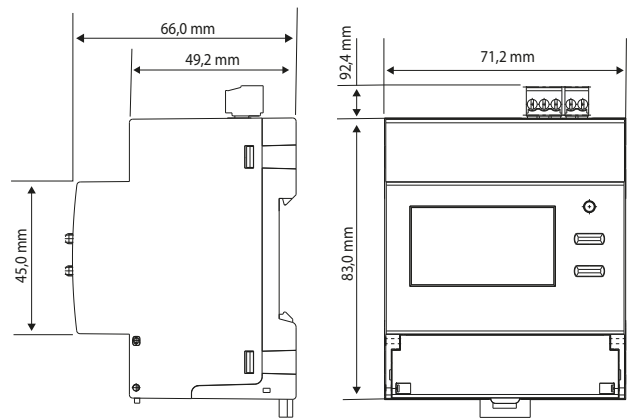


# 63A energy meter, direct connection


Cat. N°: 4 120 90 – 4 120 91

## 5. CONNECTIONS

Wiring diagrams:

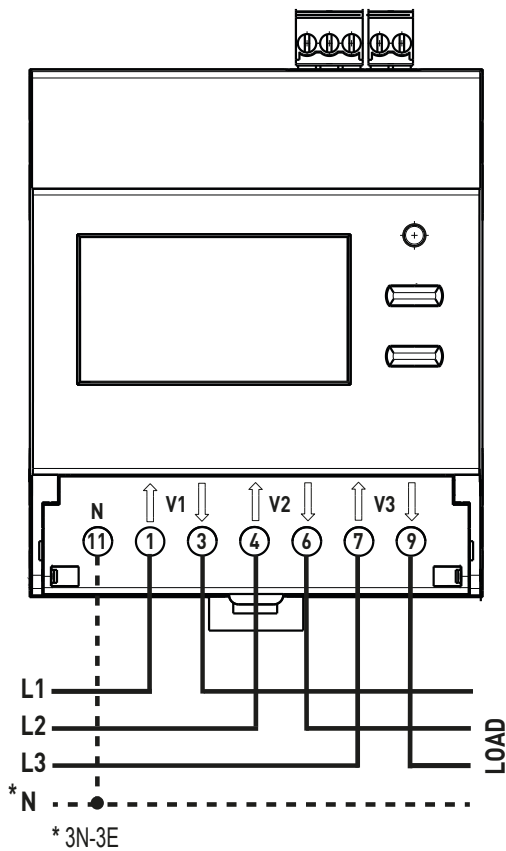

Terminal board marking and diagram combination:

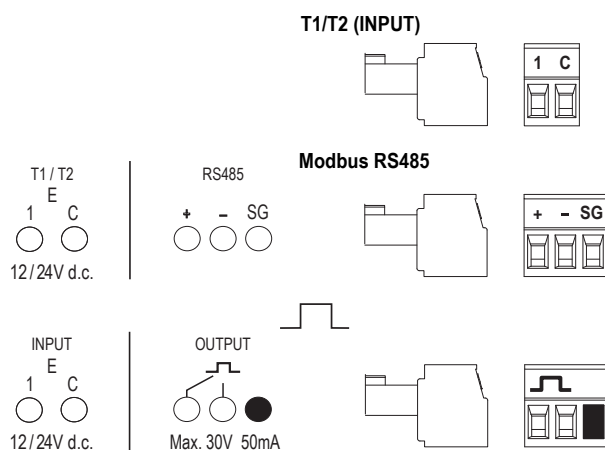

## 6. OPERATING DATA

### 6.1 ELECTRIC DATA

#### Currents:

- Reference current,  $I_{ref}$ : 5A
- Minimum current,  $I_{min}$ : 0,25A
- Maximum current,  $I_{max}$ : 63A

#### Rated voltages:

- Three-phase rated voltage  $U_n$ : 3x230V~ / 3x400V~  $\pm 15\%$

#### Rated frequency:

- $F_n$ : 50Hz; 60Hz
- Permitted variation: 49...51Hz; 59...61Hz

#### Connectable section:

- Copper wires
- Voltage connection terminals (V1, V2, V3, N):

	Without bush	With bush
Rigid wire	1 x 0,75 + 16 mm <sup>2</sup>	-
Flexible wire	1 x 0,75 + 10 mm <sup>2</sup>	1 x 4 + 10 mm <sup>2</sup>

- Terminal boards in the upper part of the meter (input, impulse output):

	Without bush	With bush
Rigid wire	1 x 0,2 + 1,5 mm <sup>2</sup>	-
Flexible wire	1 x 0,2 + 1 mm <sup>2</sup>	1 x 0,2 + 1 mm <sup>2</sup>

#### Necessary tools:

- For the voltage connection terminals (V1, V2, V3): screwdriver with 6mm blade or Pozidriv No. 2
- For the Neutral (N) connection terminal: screwdriver with 6mm blade or Pozidriv No. 2
- For the terminal boards in the upper part of the meter (input, impulse output): screws with 2.5mm blade

# 63A energy meter, direct connection

Cat. N°: 4 120 90 – 4 120 91

## 6.2 MECHANICAL DATA

### Screw terminals:

- Depth of the terminals: 12mm
- Lengths of the wire stripping: 11mm

### Screw head:

- Voltage connection terminals (V1, V2, V3): screws with countersunk head with hexagon socket and Pozidriv No. 2
- Neutral (N) connection terminal: screw/screws with countersunk head with hexagon socket and Pozidriv No. 2
- Terminal boards in the upper part of the meter (input, impulse output): screws with countersunk head with hexagon socket

### Recommended torque:


- Voltage connection terminals (V1, V2, V3): 2.5 Nm
- Neutral (N) connection terminal: 2.5 Nm
- Terminal boards in the upper part of the meter (input, impulse output): 0.2 N/m

### Maximum torque:

- Voltage connection terminals (V1, V2, V3): 3 Nm
- Neutral (N) connection terminal: 3 Nm
- Terminal boards in the upper part of the meter (input, impulse output): 0.3 Nm

### Terminal protection:


- The power terminals are protected with sliding and sealable terminal front covers which are integrated in the device

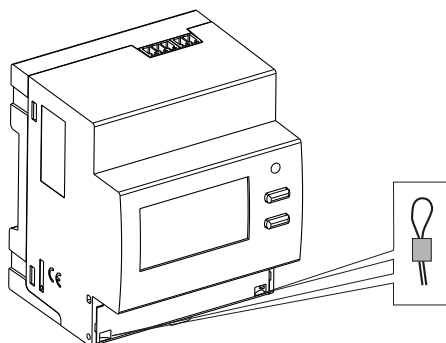

## 7. GENERAL FEATURES (continues)

### Marking data:

Indelible marking

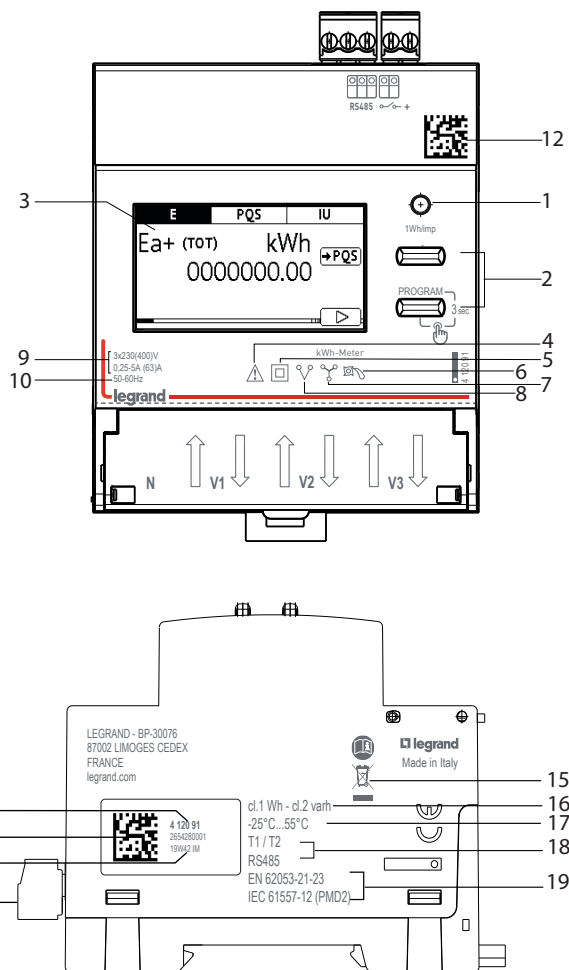

1. Metrological LED
2. Keypad made up of 2 double-function pushbuttons (display/configurations)
3. Graphic display
4. Consult the user manual before installation
5. Double insulation
6. Connection on 3-wire three-phase line
7. Connection on 4-wire three-phase line
8. Anti-rotation device (anti-decreasing)
9. Voltage/Current
10. Frequency
11. Product code
12. Datamatrix for product traceability
13. Week and year of manufacture
14. Output connection terminals
15. RAEE Symbol
16. Precision class
17. Temperature of use
18. Outputs
19. Standard



# 63A energy meter, direct connection

Cat. N°: 4 120 90 – 4 120 91



## 7. GENERAL FEATURES

### Laser marking

**Left side**  
Traceability information

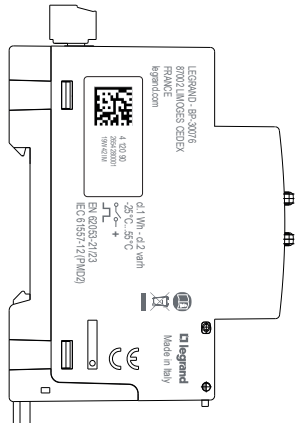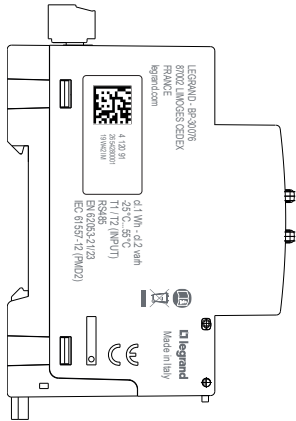

**Right side**  
Wiring diagram

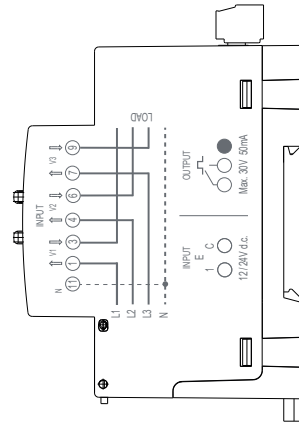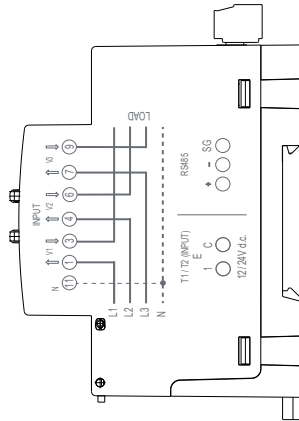

## 7. GENERAL FEATURES (continues)

### Display:

- Graphic, backlit, 1.8 inches (256x128).

### Resolution:

- Total meters: 0,01kWh/kvarh
- Partial meters: 0,01kWh/kvarh
- Tariff meters: 0,01kWh/kvarh

### Maximum indication

- Total meters: 9 999 999,99
- Partial meters: 9 999 999,99
- Tariff meters: 9 999 999,99

**Metrological LED:** 1Wh/imp.

### Display of the value and programming:

- By means of the front keypad, 2 pushbuttons.
- Change protected by identification code (**predefined code 1000**); the code can be changed during the programming procedure.

### Measurements and precision in conformity with EN/IEC 61557-12

- Current: cl.0,5
- Voltage: cl.0,5
- Frequency:  $\pm 0,1$  Hz
- Instantaneous total active power, phase, average value and max. average value cl.1
- Instantaneous total active power, phase, average value and max. average value: cl.1
- Instantaneous total reactive power, phase: cl.2
- Instantaneous total apparent power, phase: cl.1
- Power Factor: cl.1

### Average power:

- Measurement: active power
- Calculation: moving average, on the selected period
- Average time: 5/8/10/15/20/30/60 min.


### Hour meter:

- Counting of operating hours and minutes (**resettable meter**)
- Resolution: 7 figures (5 for the hours + 2 for the minutes)
- Maximum display: 99 999.59 (tariff total)
- Programmable value: 0...50% Pn (positive)

## 7. GENERAL FEATURES

### Digital input

- The digital input allows switching the energy counting on 2 tariffs
- 2 input terminals with common point (1 - C)
- Rated voltage: 12 – 24V d.c. max. 10mA

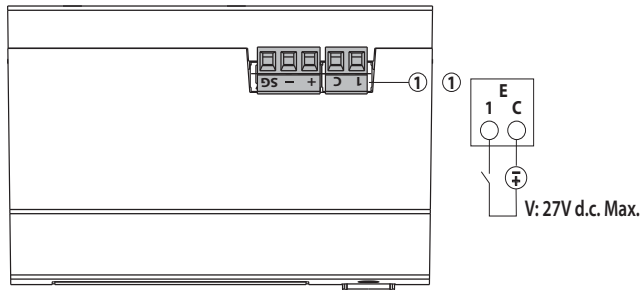

### Features of the ModBus communication port:

- Programmable addresses: from 1 to 255 (5\*)
- Communication speed: 4.8 – 9.6 – 19.2\* – 38.4 kbps
- Parity bit: none, even\*, odd
- Stop bit: 1
- Galvanically isolated with respect to the measurement inputs
- Standard RS485 3 wires, half-duplex
- Modbus® RTU protocol
- Response time (question/response time-out): ≤ 200ms
- 120Ω terminating resistor inside the instrument  
(it can be set in the SETUP menu, default value: none\*)

### Features of the Impulse output:

- Optorelay with potential-free SPST-NO contact
- Type S0 (IEC/EN62053-31)
- Voltage  $U_{imp}$ : Max. 27V a.c./d.c.
- Current  $I_{imp}$ : Max. 50 mA
- Programmable impulse weight, possible values:  
1 – 10\* – 100 – 1k – 10k Wh/imp or varh/imp
- Programmable impulse duration, possible values:  
50 -100\* – 200 – 300 – 400 – 500ms

### \* Factory setting

## 7. GENERAL FEATURES

### Auxiliary power supply:

- Shunted from the power socket (Self-supplied)

### Operating room temperatures:

- Min. = - 25 °C Max. = + 55 °C.

### Room storage temperatures:

- Min. = - 25 °C Max. = + 70 °C.

### Short-duration overcurrent:

- 30  $I_{max}$  per 10ms

### Short circuit current:

- $I_{max}$  (kA): 17,5 ( $\Delta t$ : 7,4msec)
- Energy 0.635 MA<sup>2</sup>s

### Voltage circuit self-consumption:

- Max. 1,5VA three-phase

### Current circuit self-consumption:

- Max. 1,8W for each phase

### Maximum dissipated thermal power for the thermal dimensioning of the panels: ≤ 6W

### Protection class:

- Terminal protection index against solid bodies and liquids:  
IP 20 (IEC/EN 60529).
- Housing protection index against solid bodies and liquids:  
IP 54 (IEC/EN 60529).

### Protection of the device:

- By means of thermal-magnetic circuit breaker

### Room: mechanical M1 – electric E2

### Housing material: Polycarbonate

### Packaged volume: 0,60 dm<sup>3</sup>.

## 8. CONFORMITY AND CERTIFICATIONS

### Insulation

- Measurement categories: III
- Level of pollution: 2
- Insulation voltage,  $U_i$ : 300V, Phase-Neutral

### Dielectric rigidity:

- Power supplies/ Outputs: 4kV / 50Hz / 1min
- Housing / Terminals: 4kV / 50Hz / 1min

### Pulse:

- Power supplies: 6.3kV / 1.2 – 50 $\mu$ sec / 0.5J
- Power supplies/ Outputs: 6.3kV / 1.2- 50 $\mu$ s / 0.5J

### In compliance with the standards:

- Precision class: Class 1 active energy (EN/IEC 62053-21)
- Precision class: Class 2 reactive energy (EN/IEC 62053-23)
- Electromagnetic compatibility: Tests in accordance with EN/IEC 62052-11 / EN 50470-1, -3
- Precision class according to IEC/EN61557-12

### Respecting the environment – Conformity with the CEE directives:

- Conformity with directive 2011/65/EU modified by directive 2015/863 (RoHS 2) which restricts hazardous substances such as lead, mercury, cadmium, hexavalent chromium, brominated flame retardants, polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE)
- Conformity with directive 91/338/CEE of 18/06/91 and decree 94-647 of 27/07/04
- Conformity with the REACH regulation

### Plastic materials:


- Plastic materials without Halogens.
- Part marking according to standards ISO 11469 and ISO 1043.

### Packaging:


- Packaging designed and produced in accordance with Decree 98-638 of 07.20.98 and directive 94/62/CE

9. COMMUNICATION

RS485 Modbus wiring diagram:

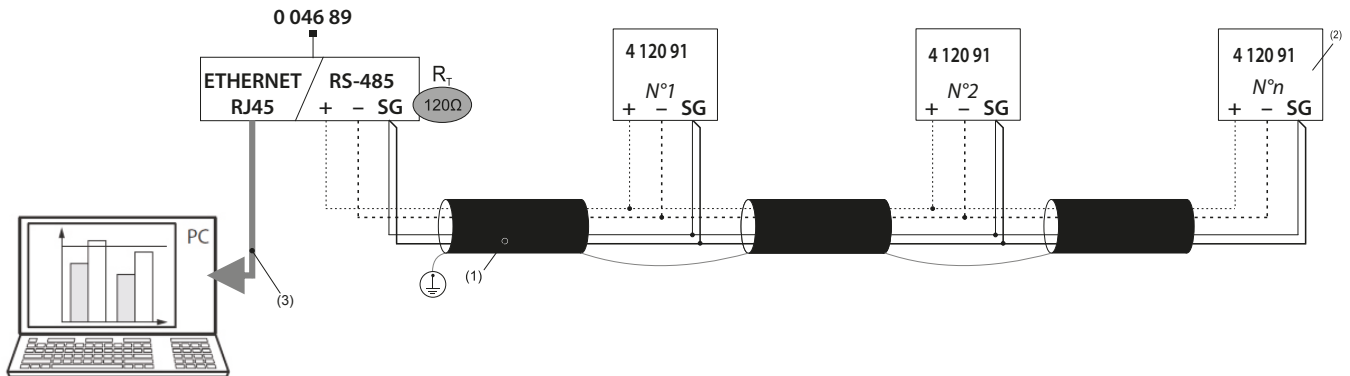

RS485 Modbus wiring diagram with Mini Web Server:

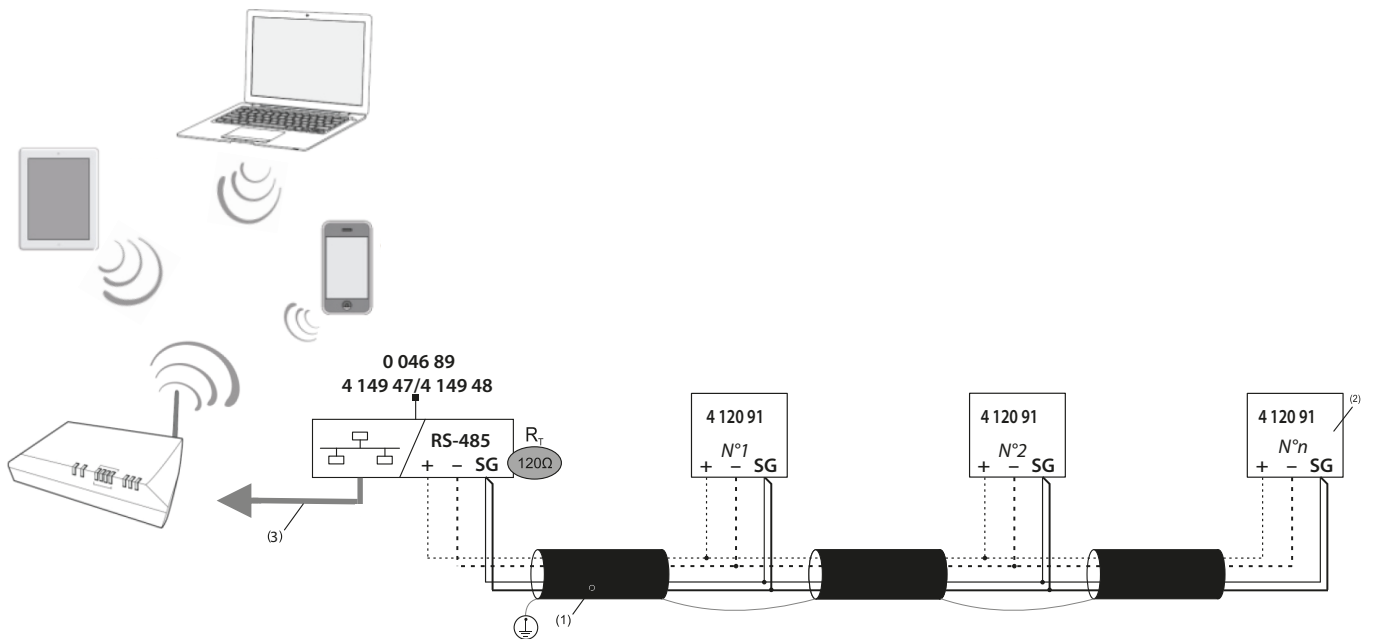

- (1) RS485: Required use of Belden 9842 or Belden 3106A wire (or equivalent) for a maximum bus length of 1000 m, or Category 6 wire (FTP or UTP) for a maximum length of 50 m
- (2) 120Ω terminating resistor inside the instrument (it can be set in the SETUP menu)
- (3) Ethernet: Cat. 6 (FTP/UTP)

Communication tables

. Modbus communication tables are available at [www.e-catalogue.legrandgroup.com](http://www.e-catalogue.legrandgroup.com), typing "4 120 91" in the search field