


K4351



K4355V12

1. USE

Acoustic signal devices: buzzer, bronze bell and electronic bell.

2. RANGE


BELLS	Cat. Nos.	Related cover codes
Bronze bell 12 Vac - 5 VA - 80 dB	K4356V12	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15
Bronze bell 230 Vac - 12 VA - 80 dB	K4356V230	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15
Bronze bell 127 Vac - 12 VA - 80 dB	K4356V127	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15
Electronic bell - 3 different sounds With volume adjustment front Power supply 12 Vac - d.c. - 2 modules	K4355V12	<input type="checkbox"/> KW15M2 <input type="checkbox"/> KM15M2 <input type="checkbox"/> KG15M2
BUZZERS		
Buzzer 12 Vac - 5 VA - 80dB	K4351V12	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15
Buzzer 230 Vac - 12 VA - 80dB	K4351V230	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15
Buzzer 127 Vac - 12 VA - 80dB	K4351V127	<input type="checkbox"/> KW15 <input type="checkbox"/> KM15 <input type="checkbox"/> KG15

Colours code:


- White
- Sand
- Black

3. OVERALL DIMENSIONS (mm)

K4351:

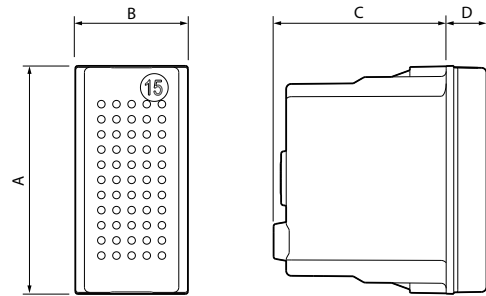

K4355V12:

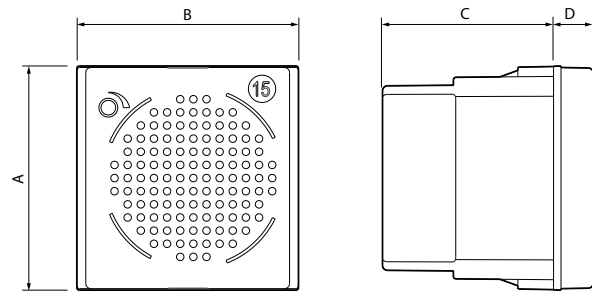

	A	B	C	D
K4351	45	22	34	8
K4355V12	45	45	36	6,5

4. CONNECTION

Stripping length (rigid or flexible cables):

- 12 mm for screwless terminals
- 9 mm for screw terminals

Depending of the items numbers.

Acoustic signal devices

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case
PC for key cover
Colour: Anthracite, White, Tech

Halogen-free
UV resistant

+ 85°C/30 s for insulating parts holding live parts in place.
+ 65°C/30 s for other parts made of insulating materials.

■ 5.3 Material characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer e. catalogue.