



Obria™ Fused Connection Unit


Cat. No(s): MEC62055/56/57XX MY
"XX" = Color / finishes: WH SL CH BL RG
"MY" = Malaysia



MEC62055XX MY



MEC62056XX



MEC62057XX

1. USE

Used for overload protection.
(Supplied with M3.5 screws for Flush mounting or surface mounting BS boxes.)

2. RANGE


Designation	Cat. No.
1G 13A FUSED SPUR UNIT UNSWITCHED + CORD OUTLET	MEC62055XX MY
1G 13A FUSED SPUR UNIT SWITCHED	MEC62056XX
13A SPUR UNIT SWITCHED + LED INDICATOR	MEC62057XX

Colours

-Matt colors finishes

WH: Matt White
SL: Dark silver
CH: Champagne
BL: Matt Black
RG: Rose gold

3. DIMENSIONS (mm)

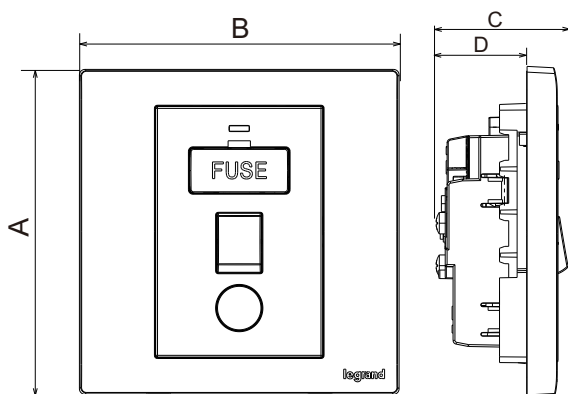

3. DIMENSIONS (mm)(Continued)

References	A	B	C	D
MEC62055XX MY	87.4	86	32	23.9
MEC62056XX MEC62057XX	87.4	86	32.1	21.4

Box depth ≥ 35 mm

4. CONNECTION

Types of terminals: with screws
Terminal capacity: $4 \times 1.5 \text{ mm}^2$
 $2 \times 1.5 \text{ mm}^2$
 $1 \times 4 \text{ mm}^2$
 $1 \times 6 \text{ mm}^2$

Recommended stripping length: 12 mm
Recommended screwdriver size: < 4 mm flat blade

5. TECHNICAL CHARACTERISTICS

5.1 Material characteristics

Rocker: PC
Plate: PC
Frame: PC
Base: PC
Self-extinguishing:
+ $850^\circ \text{C} / 30 \text{ s}$ for insulating parts holding live parts in place
+ $650^\circ \text{C} / 30 \text{ s}$ for other parts made of insulating materials

5.2 Electrical characteristics

Voltage: 250V~
Current: 13A

5.3 Climatic characteristics

Storage temperatures: -10°C to $+70^\circ \text{C}$
Operating temperatures: -5°C to $+35^\circ \text{C}$

5.4 Mechanical characteristics

Impact test: IK04
Protection against solids & liquids: IP20

6. CLEANING

Surface cleaning with a soft, slightly damp cloth.
Do not use: acetone, tar remover, trichloroethylene

7. CONFORMITY - APPROVALS

Conform to BS 1363-4.