



## Surface-mounted power sockets French standard

Cat. No(s): 0 860 22L/27L/76L  
0 861 22L/27L/30LA



0 861 22L

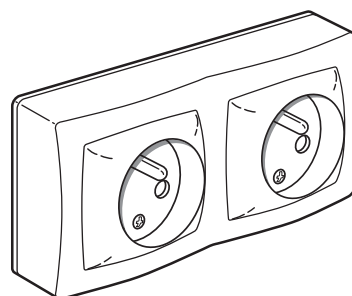

0 860 76L

### 1. USE


Power sockets 16 A conforming to french standard.  
Devices supplied complete or modular mechanisms  
2P sockets should only be used in the event of renovation.

### 2. RANGE

Description	Comple Unit	Modular component
2 P socket outlets with shutters	0 860 22L	0 861 22L
2P+E socket outlets without shutters	0 860 27L	0 861 27L
2-gang: 2 x 2P+E Use vertically and horizontally	0 860 76L	-
2P+E sockets Construction site package with protective eclips	-	0 861 30LA


### 3. OVERALL DIMENSIONS (mm)

#### Comple unit

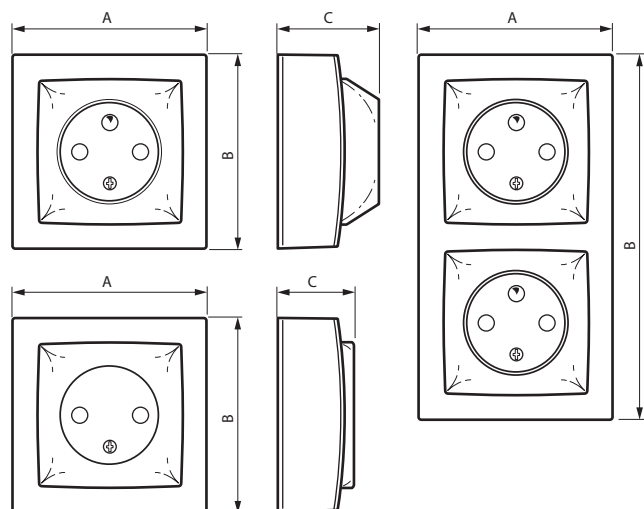

### 3. OVERALL DIMENSIONS (mm) (continued)

#### Modular component

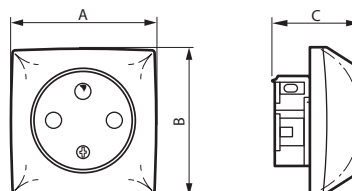

References	A	B	C
0 860 22L	72	72	28
0 860 27L	72	72	38
0 861 22L	54	54	25.3
0 861 27L	54	54	36
0 860 76L	72	136	36
0 861 30LA	54	54	36

### 4. CONNEXION

Terminal type: automatic  
Terminal capacity: from 1.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> (1 or 2 conductors)  
Stripping length: 12 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Protection index

Protection against solid bodies and liquids: IP 20

Protection against mechanical impact: IK 04

#### ■ 5.2 Material characteristics

Frame, support: ABS

Cover plate: PC

UV resistant

Halogen-free

Self-extinguishing:

+ 850° C / 30 s for insulating components holding in place live parts.

+ 650° C / 30 s for the other insulating components.

#### ■ 5.3 Electric characteristics

Voltage: 250 Vac

Current: 16 A

Fréquency: 50 Hz

#### ■ 5.4 Climatic characteristics

Storage and operating temperature: - 5° C to + 40° C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane, Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Conforming to standard NFC 15-100 (child safety provided by clip-on cover system on all sockets).

Compliant with installation and manufacturing standards.

See e.catalogue