


Connected opening sensor for doors and windows

Cat. No(s) : 0 690 62 - 0 690 63

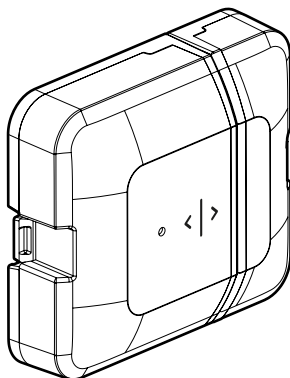

1. USE


This sensor detects when a door or window is opened or closed by sending notifications and alerts via the Home + Control application.

2. RANGE

Must be paired with a Legrand "with Netatmo" connected gateway.
Supplied with mounting spacers and 1 battery.


White	Black
0 690 62	0 690 63

3. DIMENSIONS (mm)

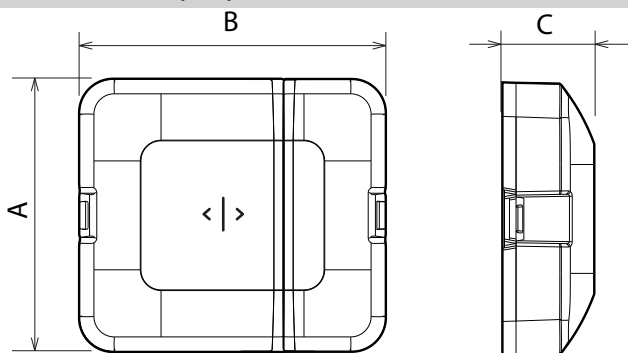

A	B	C
40	45	13.5

Mounting spacers with 4 different thicknesses (C / C1 / C2 / C3) :

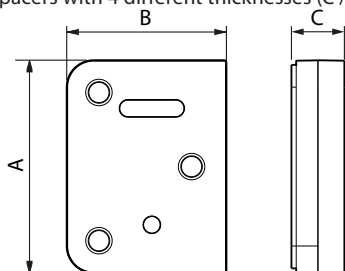


A	B	C / C1 / C2 / C3
40	30	3 / 5 / 10 / 20

4. OPERATION

Wireless range: 180 m in open field

LED indicator:
- Useful during installation

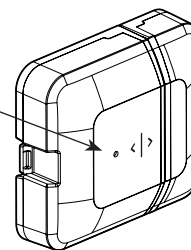

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact protection: IK04
Protection against solid objects and liquids: IP40

■ 5.2 Material characteristics

PC

■ 5.3 Electrical characteristics

Battery: CR2032 - 3V

■ 5.4 Climatic characteristics

Storage temperature: 0°C to +45°C
Recommended installation temperature: + 5° C à + 35° C

6. CARE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents:
Hexane, methylated spirits, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products



Take care to recycle the battery appropriately.

7. STANDARDS AND APPROVALS

Complies with international standards relating to electrical safety and the use of radio frequencies.

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 690 62 - 0 690 63) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue