
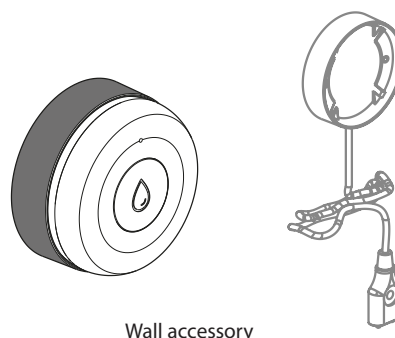


Connected water leak detection sensor

Cat. No(s) : 069064

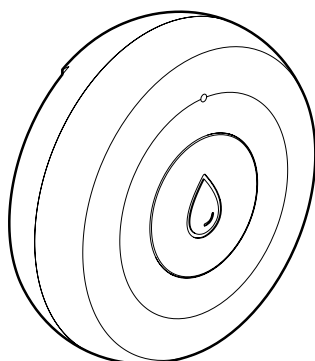

Wall accessory


1. USE

This device activates as soon as a water leak is detected, emitting an audible alert and sending a notification and alert via the Home + Control app.

2. GAMME

Must be paired with a Legrand "with Netatmo" connected gateway. Supplied with a self-adhesive wall mount/detection cable and 1 battery.

3. DIMENSIONS (mm)

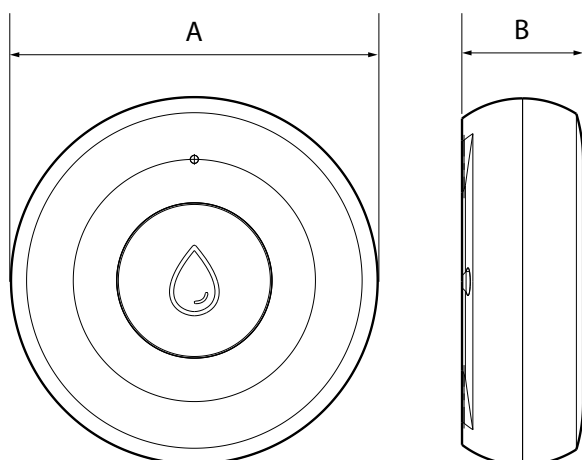


	A	B
Without wall accessory	54,5	18
With wall accessory	56,6	26

4. OPERATION

Sound output: 70 dB
Wireless range: 160 m
Wall accessory cable length: 1 m

4. OPERATION (continued)



LED indicator:
- Useful during installation
- Light function can be activated from the Home + Control application

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact resistance: IK04
Protection against solid objects and liquids: IP66

■ 5.2 Material characteristics

PC and silicone

■ 5.3 Electrical characteristics

Battery: CR2477 - 3V

■ 5.4 Climatic characteristics

Storage temperature: 0°C to +45°C
Recommended installation temperature: +5°C to +35°C

6. CARE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents:
Hexane, methylated spirits, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products



Take care to recycle the battery appropriately.

7. STANDARDS AND APPROVALS

Complies with international standards relating to electrical safety and the use of radio frequencies.

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 690 64) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue