



LIGHT now

- One-way axial switches
- Two-way axial switches
- Axial pushbutton


Y4051A - Y4053A - Y4055A
Y4051M2A - Y4053M2A - Y4055M2A
YW4051A - YG4051A - YD4051A
YW4053A - YG4053A - YD4053A
YW4055A - YG4055A - YD4055A
YW4051M2A - YG4051M2A - YD4051M2A
YW4053M2A - YG4053M2A - YD4053M2A
YW4055M2A - YG4055M2A - YD4055M2A




Y4051A - Y4053A - Y4055A



Y4051M2A - Y4053M2A - Y4055M2A



..4051A - ..4053A - ..4055A



..4051M2A - ..4053M2A - ..4055M2A

Use

Axial control device for lighting and other loads, 1M and 2M.

Range


Designation	Item
One-way axial 1P 10AX - 250Va.c. lightable with led lamp (see table below)	☐ YW4051A - YW4051M2A ☐ YG4051A - YG4051M2A ☐ YD4051A - YD4051M2A ☒ Y4051A - Y4051M2A
Two-way axial 1P 10AX - 250Va.c. lightable with led lamp (see table below)	☐ YW4053A - YW4053M2A ☐ YG4053A - YG4053M2A ☐ YD4053A - YD4053M2A ☒ Y4053A - Y4053M2A
Axial push button 1P 10AX - 250Va.c. lightable with led lamp (see table below)	☐ YW4055A - YW4055M2A ☐ YG4055A - YG4055M2A ☐ YD4055A - YD4055M2A ☒ Y4055A - Y4055M2A

Axial pushbuttons 1P NO 10A - 250Va.c. lightable with led lamp (see table below) 1 module

LED Color	230 Va.c.	12/24 Va.c.
White	LN4743/230T	LN4743/12T
Blue	Y4743V230B	Y4743V12B

Colors: ☐ White ☐ Stone ☐ Dark

Overall dimensions (mm)

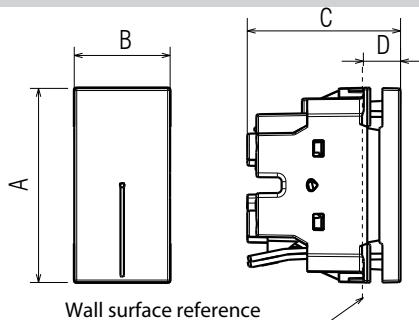

	A	B	C	D
..4051A / ..4053A / ..4055A	45.1	22.3	35.5	8.6
..M2A	45.1	44.7	35.5	8.6

Connection

Terminal type: automatic clamp
Terminal capacity: 2 x 2.5 mm² max
Stripping length: 12 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)

- Penetration by solid bodies/liquid: IP40
- Impact test: IK04

- **Material characteristics:**

- Case: PC (polycarbonate)
- Key cover: ABS
- Halogen Free
- UV resistant
- Self-extinguishing:

850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.

- **Electrical characteristics:**

- Voltage: 250 V a.c.
- Current: 10AX for ..4051 - ..4053 - ..4054..
- Current: 10A for ..4055

- **Climatic characteristics:**

- Storage temperature: -10° C a +70° C
- Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.