

This pack contains connected accessories. It requires you to install the Valena Allure with Netatmo connected starter pack first.


#### Pack contents



Connected power outlet



Connected light switch (with dimmer option) + bleeder



-W-	100/240 V~
₩	50/60 Hz
-w-	11 mA
	- 5° C → + 55° C

Wireless light switch

This product only controls Valena Allure with Netatmo light switches (with dimmer option), lighting micromodules and connected power outlets.





Finishing plate Site protection


Removable sticker

## Safety instructions

All Safety instructions
This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, after or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

# Before you start: wiring precautions (cont.)

To control a power outlet, only use the following products:



AND



Connected power outlet

Wireless switches for all control points (1 wireless light switch included in this pack)




Do not use: a connected light switch (with dimmer option) + bleeder to control a connected power outlet or a traditional power outlet.

## If you are replacing a switched power outlet:

Tip if you are replacing an old flush-mounted switch (replaced with a wireless switch)

Use a connector to connect the two wires.








The circuit must be protected by a 16 A circuit breaker


### Before you start: wiring precautions

If you plan to install two-way light switches or switched power outlets, read the following precautions:

To control a light with two or more switches, only use the following products:



AND




Connected light switch (with dimmer option) + bleeder


Wireless switches for all control points (1 wireless switch included in this pack)



**Do not use:** two connected switches (with dimmer option) to control the same lighting point.


Tip if replacing a two-way switch: old flush-mounted switch replaced by the wireless switch.





## Before you start: wiring precautions (cont.)

To replace a remote switch, only use the following product:




Connected lighting micromodule (not included in this pack)

You can keep the existing push buttons or replace them with wireless switches.



Do not use: a connected light switch (with dimmer option) + bleeder to control a connected lighting micromodule.

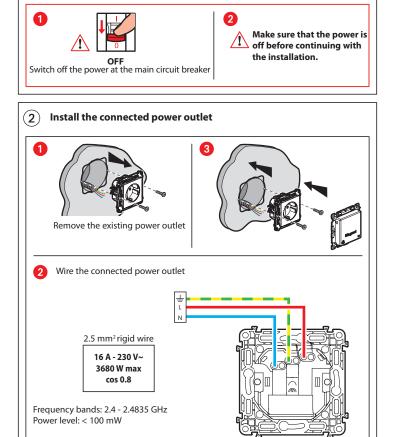

**Necessary safety precautions** 

## (3) Install the connected light switch (with dimmer option) (cont.)

In default operating mode (on/off), this switch works with the following bulbs:

+ 45°C + 5°C			LED Dimmable		÷, Î	***  ***  ***  ***  ***  **  **  **  *
100-240 VAC 50/60 Hz	2 x 2,5 mm <sup>2</sup>	-\$-	<b>□</b> ZI⊗	<b>□</b> ZI⊗	ZØ	JI®
240 VAC	Max.	300 W	(*)60 W	60 W	300 VA	300 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA
100 VAC	Max.	150 W	(*)30 W	30 W	150 VA	150 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA

Or 10 lamps max. For comfortable lighting, we recommend using bulbs of the same type and make.
 Only use transformers designed to work with electronic switches. Take the losses of the transformers into account in the calculation of the power. The transformers must be charged to more than 60% of their power.

With the dimmer option operating mode (which can be activated in the App), this switch only works with dimmable bulbs

(which can be identified by the logo on the packaging).



Complete your installation with additional products (not included in this pack):





Connected roller shutter switch

N (neutral) = blue

L (live) = any except blue and green/yellow

Connected lighting micromodule

Wire the wired products using the individual installation instructions provided in the packaging for each of them.







Roller shutter wireless switch

Wake Up/Sleep wireless switch

The wireless switches will be installed later.





To ensure that your connected switch (with dimmer option) works correctly, you **must** wire **the bleeder** provided as close to the load as possible and put **a bulb** in before turning the power on.

The connected light switch (with dimmer option) works with standard bulbs or dimmable bulbs including LEDs over 5 W.

Using dimmable LEDs is recommended for optimal installation results.



If you have wired your bleeder but you are using non-dimmable LED bulbs, it is possible that your bulbs will not go out fully or will flicker. If this is the case, refer to the table of recommended bulbs on the legrand.fr website.

6


## To add a connected product to your connected installation, you should follow the instructions:

- in the user guide in your connected starter pack
- in the Home + Control application (Settings/Add a new product section)
- or consult the user manual on **legrand.fr**



#### www.legrand.fr

LEGRAND - Pro and Consumer Service - BP 30076 87002 LIMOGES CEDEX FRANCE • www.legrand.com

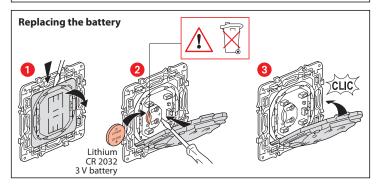

## SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

### Legrand

declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.

The full text of the EU declaration of conformity

is available on the following website: **www.legrandoc.com**