



Wireless and batteryless Home/Away command





1. USE

Wireless batteryless general control, used to control leaving home/coming home scenes involving lights, roller shutters and connected sockets. Requires the prior installation of a starter pack for connected installation «...with Netatmo».

Fixes directly on the wall or screws onto a flush-mounting box.

Fits on a piece of furniture (movable).

Can be associated with 20 connected products.

Can be combined in multigangs with other wiring devices (except in Arteor, Arteor Advance).

Mechanism designed to run 1 million operations

2. RANGE

Wireless batteryless general control, used to control leaving home/coming home scenes involving lights, roller shutters and connected sockets. Equipped with a RESET button (hidden) used to return to factory


Repositionable self-adhesive fixings supplied.


To be equipped with plate.

| | White | Black | Titanium | Aluminium | Champagne | Magnesium |
|-----------------------|--|--|--|----------------------|----------------------|----------------------|
| Céliane (before 2024) | 0 648 72 0 677 90L | 0 677 85L 0 676 14L (graphite) | 0 648 73L | | | |
| Céliane (2024) | CB0422 - CB9422 | CN0422 - CN9422 | CT0422 | | | |
| Dooxie | 6 00085L | | | | | |
| Mosaïc | 0 770 56L | | | | | |
| Valena Next | 7 418 01L | 7 418 61L | | 7 418 31L | | |
| Arteor | 5 742 86 5 744 30 | | | 5 742 92 5 744 33 | 5 742 28 5 744 32 | 5 742 21 5 744 31 |
| Arteor Advance | AA5208MW (Matt) AC5208MW (Matt) AA5707MW (Matt) AC5707MW (Matt) | AA5208MB (Matt) AC5208MB (Matt) AA5707MB (Matt) AC5707MB (Matt) | AA5208MT (Matt) AC5208MT (Matt) AA5707MT (Matt) AC5707MT (Matt) | | | |


Wireless and batteryless Home/Away command

Catalog number(s): AA5208MB/MT/MW - AC5208MB/MT/MW AA5707MB/MT/MW - AC5707MB/MT/MW CB0422 - CB9422 - CN0422 - CN9422 - CT0422 0 648 72L/73L 0 676 14L - 0 677 85L/90L - 0 770 56L - 6 000 85L 7 418 01L/31L/61L 5 742 86/92 - 5 743 <u>21 - 5 744 30/31/32/33 - 5 748 28</u>

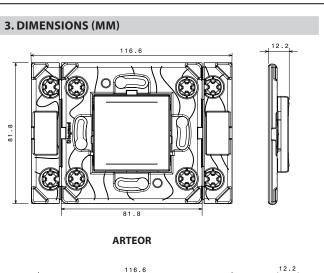





ARTEOR ADVANCE (ACXXXXXX) «POOPPOODOQUOOQ




ARTEOR ADVANCE (AAXXXXXX)




Technical data sheet: S000113314EN-02



Updated: 19/03/2025











4. OPERATION

4.1 All ranges



Arrival scenario when pressed at the top: By default, switches on the connected sockets. Can be customised with the Home + Control app.

Leaving scenario when pressed at the bottom: By default, switches OFF all the lights and roller shutters in the installation. Can be customised with the Home + Control app.




CONFIGURATION button used for programming: - association - association
- channel change
- return to factory mode
(by simultaneous presses with the rocker
on the front of the product)

Wireless and batteryless Home/Away command


Catalog number(s): AA5208MB/MT/MW - AC5208MB/MT/MW AA5707MB/MT/MW - AC5707MB/MT/MW CB0422 - CB9422 - CN0422 - CN9422 - CT0422 0 648 72L/73L 0 676 14L - 0 677 85L/90L - 0 770 56L - 6 000 85L 7 418 01L/31L/61L 574286/92-574321-574430/31/32/33-574828

4.2 Arteor Advance (AXXXXXX)



Arrival scenario when pressed at the top: By default, switches on the connected sockets. Can be customised with the Home + Control app

Leaving scenario when pressed at the bottom: By default, switches OFF all the lights and roller shutters in the installation. Can be customised with the Home + Control app.



- CONFIGURATION button used for programming:
 association
 channel change
 return to factory mode
 (by simultaneous presses with the rocker on the front of the product)

5. TECHNICAL CHARECTERISTICS

5.1 Mechanical characteristics

Impact protection: IK 02

Protection again solid/liquid bodies: IP 20 without plate

IP 40 assembled product

Mechanical handling: 1 000 000 operations

5.2 Material characteristics

Rocker:

| | Wh. | BI | Tit. | AI. | Ch. | Mag. |
|----------------------|------------|-----|------|-----|-----|------|
| Céliane (av.2024) | ABS | ABS | ABS | | | |
| Céliane (2024) | ABS | ABS | ABS | | | |
| Dooxie | ABS | | | | | |
| Mosaîc | ABS | | | | | |
| Valena Next | ABS | ABS | | ABS | | |
| Arteor | ABS | ABS | | ABS | ABS | ABS |
| Arteor Advance. | ABS rPC | rPC | rPC | | | |

Mechanism box with support: Charged PC 10 % fiberglass

Halogen free

Self-extinguishing; 650° C / 30s

Technical data sheet: S000113314EN-02

5.3 Electrical characteristics

Autonomous wireless and batteryless control

Radio technology zigbee frequency 2,4 GHz to 2,4835 GHz

Radio performance: Minimum range 150 m in point-to-point link and

Radio performance with metallic finish: Minimum range 75 m in pointto-point link and free field.

Power level: < 10 mW

Zigbee channel by default: 11

Technology: Zigbee PRO Certified, Green Power feature (bidirectional

communication: not supported).

IEEE 802.15.4 (LR-WPAN).

5.4 Climatic characteristics

Use temperature (excep external conditions): - 10° C to + 50° C

Storage temperature: - 10° C to + 50° C

6. PROGRAMMATION


In any cases, refer to the using instructions of devices to be associated.

6.1 PAIRING

6.1.1 PAIRING WITH A TOOL

Requires a tool (software, app, etc) connected to the receiver Zigbee network, communicating on channel 11 and capable of exploiting and communicating this data to the destination receiver(s) (pairing):

a- scan the QR Code in front:



b - Depending on the tools available, decode the QR CODE frame with the following fields:

The structure of the QR CODE is as follows:

«G\$K:ZLGP14\$O:WWWWWWWWWWWWWWWWWWWWWWWWWWW WWWWWWXXXX%H\$S:YYYYYYYY

With:

Updated: 19/03/2025

In bold: fixed prefixes and separators common to all products;

In regular: variables unique to products

-after «K:»: the product greenpower model(ZLGP14 = Home/Away command)

-after «O:»: the unique security key with 32 unique and random characters (W) and 4 CRC characters (X)


-after the first «S:»: the SourceID


If the paired receiver status doesn't change, complete the FACTORY RESET operation in Section 6.3, and try again.

Wireless and batteryless Home/Away command

6.1.2 MANUAL PAIRING


Caution, if you select this mode, the QR Code data can no longer be used (not possible to pair with a tool): Initiate the receiver pairing procedure (see the manufacturer instructions for more details).

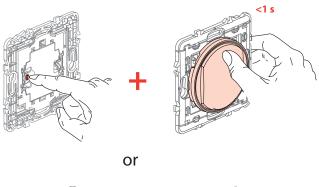

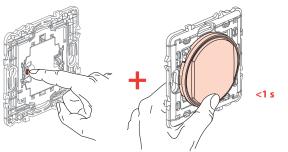

While holding the «setup» button on the wireless, batteryless control, **briefly** press the «Home» or «Away» button on the wireless batteryless control.


6.2 CHANNEL CHANGE

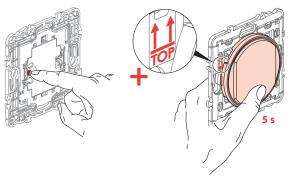

While holding the «setup» button on the wireless, batteryless control, press the lower button on the wireless batteryless control for 5 seconds.

Details and order of channel changes : **(FACTORY : 11)** 15, 20, 25, 12, 13, 14, 16, 17, 18, 19, 21, 22, 23, 24, 26, 11, 15, 20, ...

6.3 BACK TO FACTORY MODE (DISASSOCIATION + BACK ON CHANNEL 11)

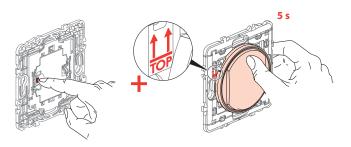

Technical data sheet: S000113314EN-02

While holding the «setup» button on the wireless, batteryless control, press the upper button for 5 seconds.

Check that your control is correctly reset by pressing «Home» and then «Away».

Additional Zigbee documentation is available at «developer.legrand. com».

7. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution : Always test before using special cleaning products, a prior test is required

Must not be painted.

8. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control

9. STANDARDS AND APPROVALS

9.1 EU DECLARATION C OF CONFORMITY

The undersigned, LEGRAND, declares that the radio-electric equipment type (AA5208MB/MT/MW - AC5208MB/MT/MW - AA5707MB/MT/MW - AC5707MB/MT/MW - CB0422 - CB9422 - CN0422 - CN9422 - CT0422 - 0 648 72L/73L - 0 676 14L - 0 677 85L/90L - 0 770 56L - 6 000 85L-7 418 01L /31L/61L - 5 742 86/92 - 5 743 21 - 5 744 30/31/32/33 - 5 748 28) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue

9.2 FCC/IC CONFORMITIES



Updated: 19/03/2025

FCC ID: 2ACN8-ZLGP1X IC: 12132A-ZLGP1X MODEL: ZLGP14

This device contains licence-exempt transmitter(s)/receiver(s) that comply with FCC RF and Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with FCC and ISED radiation exposure limits set forth for general population. This device must not be co-located or operating in conjunction with any other antenna or transmitter. FCC Caution: the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee

Wireless and batteryless Home/Away command

that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

9.3 CMIM DECLARATION OF CONFORMITY



The full text of the CMIM declaration of conformity is available on the following website: **www.legrand.com/ecatalogue**

9.4 UKCA DECLARATION OF CONFORMITY

UK CA

Only for Arteor range;

The full text of the UKCA declaration of conformity is available on the following website: www.legrand.com/ecatalogue

9.5 CONNECTIVITY STANDARDS ALLIANCE'S CERTIFICATION





certified by connectivity standards alliance

Model: ZLGP14

Technical data sheet: S000113314EN-02

Created: 07/10/2020 **L7 legrand**

Updated: 19/03/2025