

# **VITP7-EBDSPIR** | Compact, ceiling, flush/surface mounted, PIR, presence/absence detector





The connection to the controllers is made via an easy EBS-PC RJ45 plug and socket cable arrangement.

The unit takes low power from the controllers and are SELV environment safe.


The majority of the logic of control is setup within the simple setup of the Vitesse Plus controllers but minimal configurations of time-outs and target light levels can be programmed using infra-red signals via the UNLCDHS LCD handset.

# **Key Product Features:**


- Low profile design
- RJ45 connection
- Can be flush or surface mounted
- Infrared programmable



#### Dimensions (mm)

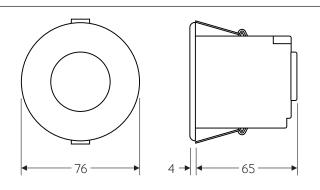

# **Detection pattern**

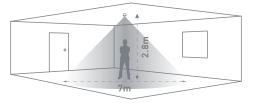

high (sensitivity) low


# **Technical Data**

Part Code	VITP7-EBDSPIR
Weight	0.100kg
Supply voltage DC	12 VDC
Working temperature range °C	-10 to 35°C
Humidity	5 to 95% non-condensing
Material (casing)	Flame retardant ABS and PC/ABS
IP rating	40
Compliance (€	EMC-2014/30/EU

# **Accessories and Associated Products**

Part Nu	ımber	Description
	UNLCDHS	Professional, programming/commissioning LCD handset
	DBB	Surface mount back box
	DBB-EXT	Surface mount back box extender
	EBDSPIR-MS	Masking shields

# Installation

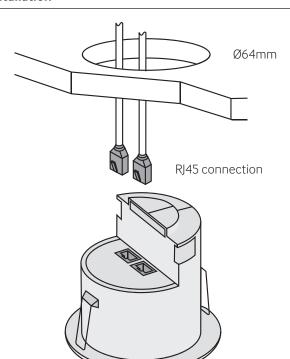



**CP Electronics** A Business unit of Legrand Electric Limited, Brent Crescent, London NW10 7XR, UK t. +44 (0)333 900 0671 info@cpelectronics.co.uk

connect with us 🔰 in 📑 🔛 www.cpelectronics.co.uk







This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and the applicable Building Regulations.

Due to our policy of continual product improvement CP Electronics reserves the right to alter the specification of this product without prior notice.



