

EBDSPiR-PRM-LV | PRM switching, compact, IP40, ceiling, flush mounted, PIR, presence/absence detector, low voltage



Key Product Features:


- Low profile design
- Low voltage
- Self contained unit
- Pluggable
- Range up to 7m at 2.8m mounting height
- Programmable via our UHS5 or UNLCDHS infrared handsets
- User handset available to control on/off, lux levels and preset scenes
- Flush or surface mounted with DBB accessory
- 5 year warranty

Key Functions:


- Switching with lux level sensing
- Programmable via our programming handset
- Absence detection functionality

Detection pattern

high < sensitivity > low

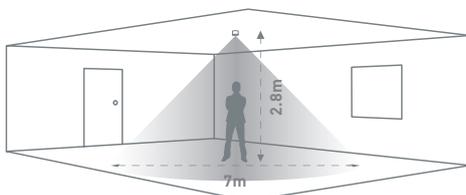

Dimensions (mm)

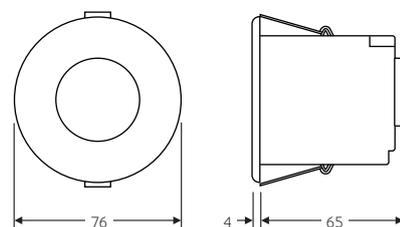

Technical Data

Part Code	EBDSPIR-PRM-LV	
Control method	PRM Switching	
Weight	0.150kg	
Supply voltage AC	10–26.5 VAC	
Supply voltage DC	11.5–36 VDC	
Supply frequency	50Hz	
Power consumption parasitic	271mW	
Terminal capacity	2.5mm ²	
Maximum loads		
Incandescent lighting	8A	
Fluorescent lighting	6A	
Compact fluorescent lighting	3A	
LED lighting	3A	
Resistive heaters	10A	
Working temperature range	-10 to 35°C	
Humidity	5 to 95% non-condensing	
Material (casing)	Flame retardant ABS and PC/ABS	
Insulation class	2	
IP rating	40	
Compliance		EMC-2014/30/EU LVD-2014/35/EU

Accessories and Associated Products

Part Number	Description
 UHS5	Compact, programming/ commissioning handset
 UHS7	Compact, user handset
 UNLCDHS	Professional, programming/ commissioning LCD handset
 EBD-ENCIP1	Pre-drilled 64mm hole detector adapter enclosure
 EXD-HSC	Extended wiring housing
 EBDSPIR-MS	Masking shields for EBDSPIR range
 DBB	Surface mount back box for 76mm diameter detectors and light level controls
 DBB-EXT	Surface mount back box extender for 76mm diameter detectors and light level controls

 <p>www.cpelectronics.co.uk</p>	<p>CP Electronics A Business unit of Legrand Electric Limited, Brent Crescent, London NW10 7XR, UK t. +44 (0)333 900 0671 info@cpelectronics.co.uk</p> <p>connect with us    </p>	<p>Important notice: This device should be installed by a qualified electrician in accordance with the latest edition of the IEE Wiring Regulations and the applicable Building Regulations.</p> <p>Due to our policy of continual product improvement CP Electronics reserves the right to alter the specification of this product without prior notice.</p> <div style="text-align: right;">   </div>
--	---	--