Legrand cabling system, LCS³ cat. 6

flat patch panels - equipped

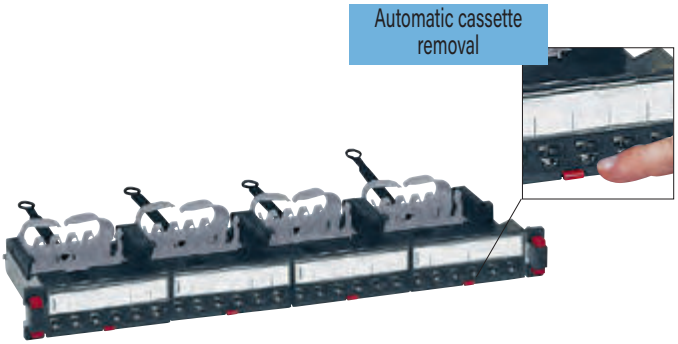

0 337 61

Equipped with new-generation Quick-Fix for automatic (screwless) mounting on enclosure and cabinet uprights
Universal mounting on all cabinets or enclosures
Panels ensure automatic earthing of each connector
Equipped with 4 bundles guides fixed at the rear

Pack	Cat.Nos	**Cat. 6 patch panels equipped with 24 RJ 45 connectors**
		19" panels - 1U Equipped with 4 cassettes of 6 pre-fitted cat. 6 LCS³ RJ 45 connectors Automatic cassette removal by simple pressure Each connector can be removed individually T568A and B marking with colour codes Equipped with rear cable guide to hold cables during maintenance Supplied with numbered colour labels Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards
		Flat panels 24 RJ 45 connectors - 1U - PoE++
1	0 337 60	UTP
1	0 337 61	FTP
1	0 337 62	STP

Legrand cabling system, LCS³ cat. 6

flat patch panels, to be equipped

0 337 90

0 337 98

0 337 99

Equipped with new-generation Quick-Fix for automatic (screwless) mounting on enclosure and cabinet uprights
Universal mounting on all cabinets or enclosures
Panels ensure automatic earthing of each connector
Equipped with 4 bundles guides fixed at the rear

Pack	Cat.Nos	**19" flat patch panels - to be equipped**
		19" panels - 1U Equipped with rear cable guide to hold cables during maintenance Automatic cassette removal by simple pressure Each connector can be removed individually
		Flat panel with empty cassettes to be equipped with connectors
1	0 337 90	Equipped with 4 automatically removable cassettes, takes up to 24 cat. 5e to cat. 8 RJ 45 connectors
		Empty flat panel to be equipped with cassettes
1	0 337 91	Can take a maximum of 4 automatically removable cassettes: - copper to be equipped with cat. 5e to cat. 8 RJ 45 connectors - fiber optic
		High Density flat panel with empty cassettes to be equipped with connectors
1	0 337 93	Equipped with 4 High Density cassettes, takes up to 48 cat. 5e to cat. 6_A RJ 45 connectors
		10" flat patch panels - to be equipped
		10" panels - 1U
1	0 337 98	Takes up to 6 cat. 5e to cat. 8 RJ 45 connectors
1	0 337 99	Takes up to 12 cat. 5e to cat. 6_A RJ 45 connectors