


## Connected ON/OFF wireless module for switch and push-button

Cat. No(s): 0 676 94

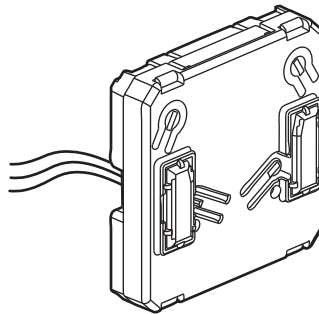

### 1. USE

Wireless control for one ON/OFF light function or connected socket. Transform a mechanical switch or push-button into a wireless ON/OFF switch.

Only controls one connected switch or one connected lighting micro-module, or one connected cable outlet or one connected socket outlet "...with Netatmo".


Can be used as two-way switch.

Installs in the wall box of the switch or push-button.

### 2. RANGE


Description	Black
Wireless control for one ON/OFF light function or connected socket. Supplied with battery. Equipped with an LED indicator (configuration) and a RESET button used to return to factory settings.	0 676 94

### 3. DIMENSIONS (mm)

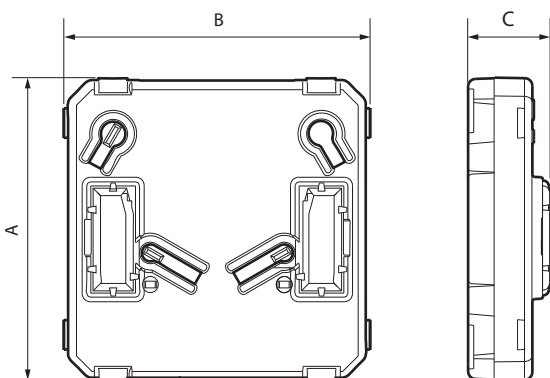

A	B	C
40	40.5	11

### 4. OPERATION

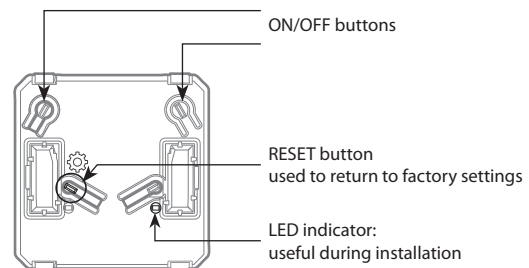

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies and/or liquids: IP 20

#### ■ 5.2 Material characteristics

Polycarbonate

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

#### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

Frequency bands: 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

#### ■ 5.4 Climate characteristics

Usage temperature: 5°C to + 45°C

Storage temperature: 0°C to + 45°C

### 6. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

**Caution:** Always test before using special cleaning products.



Take care to recycle the battery appropriately

## **7. STANDARDS AND APPROVALS**

Compliant with installation and manufacturing standards.  
See e-catalogue.

The undersigned, LEGRAND, declares that the radio-electric equipment  
type (0 676 94) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following  
website: [www.legrandoc.com](http://www.legrandoc.com)