

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems

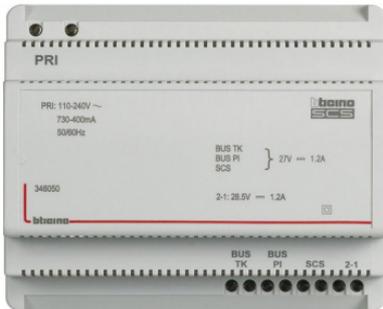


### BTICINO'S ENVIRONMENTAL COMMITMENTS

- Incorporate environmental management into our industrial sites**  
 Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).
- Offer our customers environmentally friendly solutions**  
 Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.
- Involve the environment in product design and provide informations in compliance with ISO 14025**  
 Reduce the environmental impact of products over their whole life cycle.  
 Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

<p><b>Function</b></p>	<p>Provide stable and safe DC electrical power from mains supply to devices connected to the BUS-SCS (2-wire audio/video) bus and/or auxiliary output, enabling correct communication and distribution of audio/video signals, by 1 unit of BT-346050 power supply, over a reference service life of 10 years, according to the following use scenario: 0.08% of the reference life time in 'on' mode at 75% load rate and 99.92% of the reference life time in stand-by mode at 50% load rate, for the European market.</p>
<p><b>Reference Product</b></p>	<div style="text-align: center;">  </div>
	<p>BT-346050 Power supply 2-wire systems</p>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



### PRODUCTS CONCERNED

The environmental data is representative of the following products:

<p><b>Catalogue Number</b></p>
<ul style="list-style-type: none"> <li>BT-346050</li> </ul>

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



### ■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EU amended by delegated directive (EU) 2015/863, and its amendment 2017/2102/EU.

<b>Total weight of Reference Product</b>	<b>0.35 kg</b> (all packaging included)
--	---

Product alone weight 0.21 kg					
Plastics as % of weight		Metals as % of weight		Other as % of weight	
PC	23.5 %	Ferrite	4.7 %	Electronic card	24.8 %
PA	0.8 %	Copper and copper alloys	3.8 %		
PET	0.2 %	Steel	1 %		
POM	0.2 %				

Packaging (alone) : 0.14 kg					
PE	0.3 %			Cardboard	24.5 %
				Wood	10.3 %
				Paper	5.9 %

<b>Total plastics : 0.09 kg</b>	<b>25 %</b>	<b>Total metals : 0.03 kg</b>	<b>9.5 %</b>	<b>Total others : 0.23 kg</b>	<b>65.5 %</b>
---------------------------------	-------------	-------------------------------	--------------	-------------------------------	---------------

At the date of edition of this document, the content of recycled material(s) is :

- Product alone (excluding packaging): 0% by mass
- Packaging only: 63 % by mass



### ■ MANUFACTURE

This Reference Product comes from a site that has received ISO14001 certification. The final assembly site is located in Italy.



### ■ DISTRIBUTION

Products are distributed from logistics centres located with a view to optimize transport efficiency. The Reference Product is therefore transported over an average distance of 1325 km by road from our warehouse to the local point of distribution into the European market.

Packaging is compliant with european directive 2004/12/EU concerning packaging and packaging waste.



### ■ INSTALLATION

For the installation of the product, only standard tools are needed.



### ■ USE

Under normal conditions of use, this product requires no servicing, no maintenance or additional products.

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



### END OF LIFE

The product end of life factors are taken into account during the design phase. Dismantling and sorting of components or materials is made as easy as possible with a view to recycling or failing that, another form of reuse. This product falls within the scope of the WEEE directive (2012/19/EU). Therefore it must be processed through local WEEE recycling/recovery channels.

**- Elements to process specifically:**

In accordance with the requirements of this Directive, the following components must be removed and sent to specific channels for processing which comply with the WEEE Directive 2012/19/EU:

- Electronic cards: 86 g

**- Extended producer responsibility:**

The sale of this product is subject to a contribution to eco-organisations in each country responsible for managing end of life products in the field of application of the European Waste Electronic and Electrical Equipment Directive.



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end of life. It is representative of products marketed and used in France in an electrical installation in compliance with NF C 15100 and associated product standards.

The datasets collected in this PEP are representative of the year 2025.

For each phase, the following modelling elements were taken in account:

<b>System Limit</b>	<b>Manufacture A1-A3</b>	Materials and components of the product, all transport for the manufacturing, the packaging and the waste generated by the manufacturing.
	<b>Distribution A4</b>	Transport between the last Group distribution centre and an average delivery point in the sales area.
	<b>Installation A5</b>	The end of life of the packaging.
	<b>Use B1-B7</b>	<ul style="list-style-type: none"> <li>Product category: PSR-0005-ed31-EN-2023 08 12 - §3.15. «Other equipments - active products».</li> <li>Use scenario: for a 10 years working life, 4,1 W for 99.92% of the life time on 'stand by mode' and 6 W for 0.08% of the life time on 'on mode'. This modelling duration does not constitute a minimum durability requirement</li> <li>Energy model: Electricity Mix_Low voltage_2022_Europe_EU-27.</li> </ul>
	<b>End of life C1-C4</b>	The default end of life scenario maximizing the impacts.
<b>D Module</b>	Module D is calculated according to PCR-ed4-EN-2021 09 06 based on the materials recycled and the modelled end-of-life scenario. It expresses the net benefits and burdens beyond the boundaries of the system, and are not to be included in the life cycle totals.	
<b>Software and data-base used</b>	The set of indicators used is Indicators for PEF EF 3.1 (compliant: PEP ed.4, EN15804+A2) v2.0 EIME V6 and its CODDE-2025-04-15 database	

Unless otherwise indicated the modelling energetic mix are those integrated in the data modules used from the aforementioned database.

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



### ENVIRONMENTAL IMPACTS

	Total Life Cycle		Manufacturing	Distribution	Installation	Use <sup>(1)</sup>			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
Climate change - total	1.52E+02	kg CO <sub>2</sub> eq.	5.49E+00	1.83E-02	2.65E-01	1.46E+02	0.00E+00	1.46E+02	1.60E-01	-2.91E-01
Climate change - fossil fuels	1.49E+02	kg CO <sub>2</sub> eq.	5.66E+00	1.83E-02	4.86E-02	1.43E+02	0.00E+00	1.43E+02	1.59E-01	-1.60E-01
Climate change - biogenics	3.27E+00	kg CO <sub>2</sub> eq.	-1.70E-01	0*	2.17E-01	3.22E+00	0.00E+00	3.22E+00	7.05E-04	-1.30E-01
Climate change - land use and land use transformation	1.19E-04	kg CO <sub>2</sub> eq.	1.19E-04	2.64E-08	0*	0.00E+00	0.00E+00	0.00E+00	2.51E-08	0.00E+00
Ozone depletion	1.38E-06	kg CFC-11 eq.	7.35E-07	2.09E-10	1.75E-09	6.25E-07	0.00E+00	6.25E-07	1.34E-08	-2.57E-08
Acidification (AP)	7.99E-01	mole of H <sup>+</sup> eq.	3.35E-02	0*	2.85E-04	7.64E-01	0.00E+00	7.64E-01	1.16E-03	-5.06E-03
Freshwater eutrophication	3.96E-04	kg P eq.	4.57E-05	6.70E-08	5.99E-08	3.50E-04	0.00E+00	3.50E-04	1.65E-07	5.52E-08
Marine aquatic eutrophication	9.27E-02	kg of N eq.	3.11E-03	0*	6.83E-05	8.94E-02	0.00E+00	8.94E-02	1.61E-04	-1.09E-04
Terrestrial eutrophication	1.47E+00	mole of N eq.	3.58E-02	0*	9.14E-04	1.43E+00	0.00E+00	1.43E+00	2.01E-03	-1.71E-03
Photochemical ozone formation	2.95E-01	kg NMVOC eq.	1.12E-02	0*	1.92E-04	2.83E-01	0.00E+00	2.83E-01	5.02E-04	-8.49E-04
Depletion of abiotic resources - elements	2.53E-03	kg Sb eq.	2.49E-03	0*	0*	4.73E-05	0.00E+00	4.73E-05	0*	-1.15E-03
Depletion of abiotic resources - fossil fuels	3.58E+03	MJ	7.74E+01	0*	9.10E-01	3.50E+03	0.00E+00	3.50E+03	2.70E+00	-5.46E+00
Water requirement	1.76E+01	m <sup>3</sup> deprivation worldwide eq.	6.50E+00	0*	2.87E-03	1.11E+01	0.00E+00	1.11E+01	2.43E-02	-3.37E-01
Emission of fine particles	6.18E-06	incidence of diseases	1.83E-07	0*	1.97E-09	5.98E-06	0.00E+00	5.98E-06	8.83E-09	-3.04E-08

\*Represents less than 0.01% of the total life cycle of the reference flow

<sup>(1)</sup> For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table

In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



	Total Life Cycle		Manufacturing	Distribution	Installation	Use <sup>(1)</sup>			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
<b>Ionizing radiation, human health</b>	<b>1.94E+02</b>	<b>kBq of U235 eq.</b>	2.97E+00	0*	0*	1.91E+02	0.00E+00	1.91E+02	4.90E-02	-8.31E-02
<b>Ecotoxicity (fresh water)</b>	<b>3.08E+02</b>	<b>CTUe</b>	8.55E+01	5.00E-01	1.22E+00	2.19E+02	0.00E+00	2.19E+02	2.38E+00	-6.01E-01
<b>Human toxicity, carcinogenic effects</b>	<b>1.42E-07</b>	<b>CTUh</b>	1.23E-07	0*	0*	1.81E-08	0.00E+00	1.81E-08	1.20E-09	-4.45E-08
<b>Human toxicity, non-carcinogenic effects</b>	<b>7.54E-07</b>	<b>CTUh</b>	3.24E-07	0*	3.59E-10	4.28E-07	0.00E+00	4.28E-07	2.28E-09	-1.05E-07
<b>Impacts related to land use/soil quality</b>	<b>4.31E+00</b>	<b>-</b>	4.36E-01	0*	1.09E-03	3.87E+00	0.00E+00	3.87E+00	2.30E-03	1.14E-04
<b>Use of renewable primary energy, excluding renewable primary energy resources used as raw materials</b>	<b>8.27E+02</b>	<b>MJ</b>	7.01E+00	0*	0*	8.20E+02	0.00E+00	8.20E+02	2.05E-01	-4.49E-01
<b>Use of renewable primary energy resources used as raw materials</b>	<b>1.24E+00</b>	<b>MJ</b>	1.24E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.57E+00
<b>Total use of renewable primary energy resources</b> (primary energy and primary energy resources used as raw materials)	<b>8.28E+02</b>	<b>MJ</b>	8.26E+00	0*	0*	8.20E+02	0.00E+00	8.20E+02	2.05E-01	1.12E+00
<b>Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials</b>	<b>3.58E+03</b>	<b>MJ</b>	7.37E+01	0*	9.10E-01	3.50E+03	0.00E+00	3.50E+03	2.70E+00	-5.47E+00
<b>Use of non-renewable primary energy resources used as raw materials</b>	<b>3.73E+00</b>	<b>MJ</b>	3.73E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.00E-02
<b>Total use of non-renewable primary energy resources</b> (primary energy and primary energy resources used as raw materials)	<b>3.58E+03</b>	<b>MJ</b>	7.74E+01	0*	9.10E-01	3.50E+03	0.00E+00	3.50E+03	2.70E+00	-5.46E+00

\*Represents less than 0.01% of the total life cycle of the reference flow

<sup>(1)</sup> For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table

In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



	Total Life Cycle		Manufacturing	Distribution	Installation	Use <sup>(1)</sup>			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
Use of secondary materials	8.90E-02	kg	8.90E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of renewable secondary fuels	0.00E+00	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of non-renewable secondary fuels	0.00E+00	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net use of fresh water	4.10E-01	m <sup>3</sup>	1.51E-01	0*	6.57E-05	2.59E-01	0.00E+00	2.59E-01	6.04E-04	-7.84E-03
Hazardous waste disposed of	5.08E+01	kg	4.65E+01	0*	5.28E-02	4.03E+00	0.00E+00	4.03E+00	2.00E-01	-1.44E+01
Non-hazardous waste disposed of	2.38E+01	kg	1.56E+00	0*	6.59E-03	2.20E+01	0.00E+00	2.20E+01	2.29E-01	-8.76E-02
Radioactive waste disposed of	6.14E-03	kg	8.30E-04	1.28E-06	2.75E-06	5.18E-03	0.00E+00	5.18E-03	1.19E-04	8.05E-06
Components for re-use	0.00E+00	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	4.67E-02	kg	8.20E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.85E-02	0.00E+00
Materials for energy recovery	0.00E+00	MJ by energy vector	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	0.00E+00	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of primary energy during the life cycle	4.41E+03	MJ	8.57E+01	0*	9.91E-01	4.32E+03	0.00E+00	4.32E+03	2.90E+00	-4.34E+00
Biogenic carbon content of the product	0.00E+00	kg of C	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Biogenic carbon content of the associated packaging	6.54E-02	kg of C	6.54E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.79E-02

\*Represents less than 0.01% of the total life cycle of the reference flow

<sup>(1)</sup> For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table

In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

The values of the indicators defined in the PCR-ed4-EN-2021 09 06 are available in the digital database of pep-ecopassport.org website.

For all products concerned (see § «products concerned»), take these impacts values.

# Product Environmental Profile

## BUS-SCS Power Supply Unit for 2-Wire Audio and Video Systems



Registration number: <b>LGRP-02164-V01.01-EN</b>	Drafting rules: « <b>PEP-PCR-ed4-EN-2021 09 06</b> » <b>Supplemented by «PSR-0005-ed3.1-EN-2023 08 12»</b>
Verifier accreditation N°: <b>VH08</b>	Information and reference documents : <b>www.pep-ecopassport.org</b>
Date of issue : <b>12-2025</b>	Validity period : <b>5 years</b>
<b>Independent verification of the declaration and data, in compliance with ISO 14025 : 2006</b>	
Internal <input type="checkbox"/> External <input checked="" type="checkbox"/>	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)	
PEP are compliant with NF C08-100-1 :2016 and EN 50693 :2019 or NF E38-500 :2022 The elements of the present PEP cannot be compared with elements from another program	
Document in compliance with ISO 14025 : 2006: «Environmental labels and declarations. Type III environmental declarations»	

Environmental data in alignment with EN 15804: 2012 + A2 : 2019