


Cam switches

Electrical characteristics

		PR 12	PR 17	PR 21	PR 26	PR 40	PR 63
Thermal rating		20 A	25 A	32 A	40 A	63 A	63 A
Rated operating current (Ie) AC 21		16 A	20 A	25 A	32 A	50 A	63 A
Rated operating current (Ie) AC 15		6 A	8 A	10 A	12 A	-	-
Motor performance AC 23	3 x 230 V	4 kW	5.5 kW	7.5 kW	11 kW	15 kW	18.5 kW
	3 x 400 V	7.5 kW	11 kW	11 kW	11 kW	22 kW	25 kW
	3 x 500 V	5.5 kW	11 kW	11 kW	11 kW	25 kW	25 kW
	3 x 690 V	4 kW	10 kW	10 kW	11 kW	18.5 kW	22 kW
Motor performance AC 3	3 x 230 V	3 kW	4 kW	4 kW	5.5 kW	11 kW	15 kW
	3 x 400 V	4 kW	7.5 kW	7.5 kW	11 kW	18.5 kW	22 kW
	3 x 500 V	5.5 kW	7.5 kW	7.5 kW	11 kW	18.5 kW	22 kW
	3 x 690 V	3 kW	7.5 kW	7.5 kW	11 kW	18.5 kW	22 kW
Degree of protection	front	IP 40	IP 40	IP 40	IP 40	IP 40	IP 40
	back	IP 2X	IP 2X	IP 2X	IP 2X	-	-
Insulation voltage (Ui)		690 V	690 V	690 V	690 V	690 V	690 V
Max. cable cross-section	flexible	2.5 mm ²	4 mm ²	4 mm ²	6 mm ²	16 mm ²	16 mm ²
	rigid	4 mm ²	6 mm ²	6 mm ²	6 mm ²	16 mm ²	16 mm ²

Drilling

For PR 12 - 76 x 76 mm box
2 x 2 knock-out entries PG 16



For PR 12, PR 17, PR 21 and PR 26 - 96 x 120 mm box
2 x 2 knock-out entries PG 16




For PR 40 and PR 63 - 135 x 170 mm box
6 knock-out entries PG 21
+ 4 knock-out entries PG 29




Dimensions

For PR 12 (1 to 4 contacts)



For PR 12 (1 to 9 contacts)
PR 17 and 21 (1 to 9 contacts)
PR 26 (1 to 8 contacts)

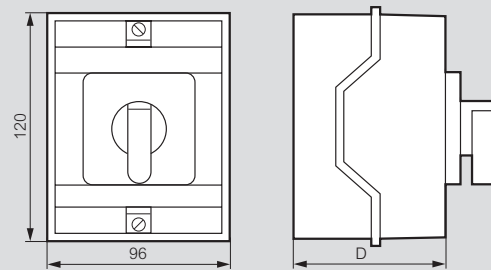

For PR 40/63 (1 to 8 contacts)

