

**Description**

Additional alphanumeric keypad module to be used in conjunction with the speaker module with graphic display 342630.

It can call the resident directly (by typing the programmed code) and access the door lock release function (by typing the secret code).

It is supplied with multi-cable and connector for connection to the speaker module.

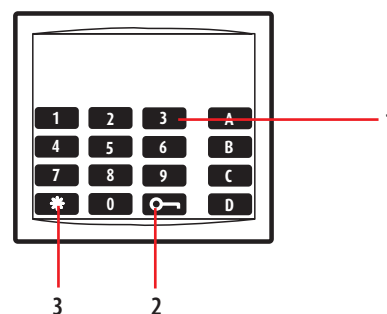
To be used with the "Alphanumeric keypad" front covers.

Once the last digit has been entered, the call is forwarded automatically.

The digits are NOT displayed on the speaker module display 342630.

System power supply cuts do NOT cause the loss of memory data.

**The device must not be configured.**

**Related items**

332671 (modular keypad front cover - Allmetal)

For the use of monobloc front covers refer to the catalogue.

**Legend**

- 1 - Alphanumeric keypad
- 2 - Door lock opening key
- 3 - Cancel key

**Technical data**

Power supply from SCS BUS: 18 – 27 Vdc

Stand by absorption: 15 mA

Max. operating absorption: 15 mA

Operating temperature: (-25) – (+70) °C

**Dimensional data**