


## Arteor™ Double USB socket - Type-A - 3.0 A

Cat. no(s): 5 700 76 - 5 710 76 - 5 720 78 - 5 725 78




### 1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

### 2. RANGE

Designation	White	Magnesium	Soft Alu	Champagne
Double USB sockets - 5 V~ - 3.0 A	5 720 78	5 725 78	5 700 76	5 710 76

### 3. DIMENSIONS (mm)

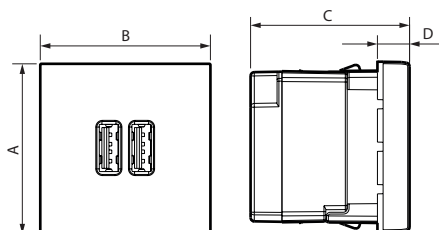

A	B	C	D
45	45	42	8.5

### 4. CONNECTION

Type of terminals: with screws  
Terminal capacity: 2 x 2.5 mm²  
Stripping length: 6 mm  
Screwdriver: flat 3.5 mm  
Circuit breaker: 16 A MAXI

#### Necessary safety precautions:



**Switch OFF the power at the main circuit breaker.  
Make sure that the power is OFF before continuing  
with the installation.**

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
Penetration by solid bodies/liquid: IP 40

#### ■ 5.2 Material characteristics

Base: PC V-0 class  
Cover-plate: PC  
Self-extinguishing:  
850°C/30 s for insulating components holding live parts in place.  
650°C/30 s for other insulating components.

#### ■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal input current	0.5 A
Maximum output current	3.0 A
Nominal output voltage	5.0 V~
Power consumption	15.0 W
Average efficiency in active mode	84.43 %
Stand-by power consumption	< 0.07 W
Consumption class without load and average level of efficiency: Level VI*	
Protection class	II - Low voltage

\*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2009/125/CE on eco-design requirements for AC/DC power supplies.

**Note:** To optimize the charging time of your device, ensure turn it off during the charging phase.

#### ■ 5.4 Climate characteristics

Storage temperature: - 20°C to + 70°C  
Operating temperature: + 5°C to + 40°C

## 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

**Caution:** Always test before using other special cleaning products.

## 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.