



Forix™ - IP 44 French sockets


Cat. No(s): 7 823 75/76/77/95/96/97



7 823 75/95

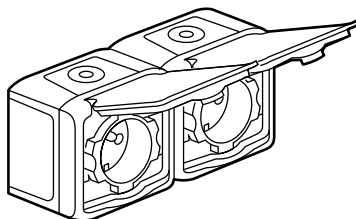

7 823 77/97

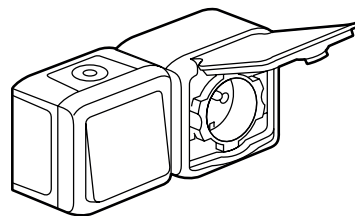

7 823 76/96


1. USE

General 16 A french socket outlets.
Mechanisms with single, large rocker can be illuminated using lamp
Cat. No. 7 823 98.

2. RANGE

White	Grey	Designation
7 823 75	7 823 95	2 P+E socket
7 823 77	7 823 97	2 x 2 P+E socket
7 823 76	7 823 96	Two-way switch + 2 P+E socket

3. OVERALL DIMENSIONS (mm)

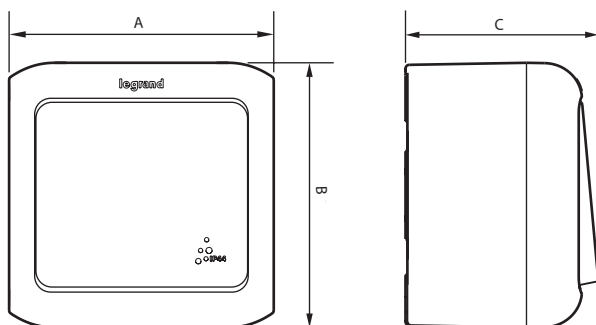

Cat. No.	A	B	C
7 823 75/95	70	70	57
7 823 76/96	140	70	57
7 823 77/97	140	70	57

4. CONNECTION

Stripping length: 10 mm
Terminal type: with screws
Terminal capacity up to: 2 x 2.5 mm²
Recommended screwdriver size: pozidrive No 2
Recommended tightening torque: 0.5 Nm for switch
0.8 Nm for socket

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against liquids: IP 44
Impact tests: IK 07

■ 5.2 Material characteristics

Box: ABS
Rocker: ABS
Mechanism: PC
Conduit gland: SEBS

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 10 AX for switch - Max. power for self-ballasted lamps: 100 W
16 A for socket

■ 5.4 Climate characteristics

Storage and use temperature: - 25°C to + 60°C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: hexane (EN 60669-1), methylated spirits, soapy water, diluted ammonia, pure bleached diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

7. ACCESSORIES

■ 7.1 Lamps

Become illuminated with lamp Cat. No 7 823 98

■ 7.2 Spare membrane glands

White membrane Cat. No 7 823 79

Grey membrane Cat. No 7 823 99