



N4165



N4133












N4164/12







1. USE

Socket outlets : different international standards.

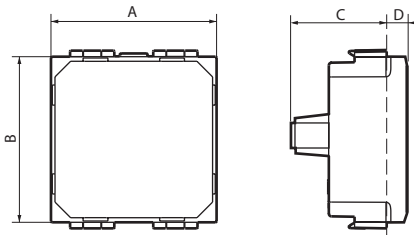
2. RANGE

CHINESE STANDARD		Cat. No.
	2 P+E 10 A 250 VAC socket shuttered - 2 modules	<input type="checkbox"/> N4130 <input checked="" type="checkbox"/> L4130
	2 P+E 16 A 250 VAC socket shuttered - 2 modules	<input type="checkbox"/> N4131 <input checked="" type="checkbox"/> L4131
	2 P+E+2 P 10 A 250 VAC socket shuttered Chinese and Euro-American standard - monobloc	<input type="checkbox"/> N4189 <input checked="" type="checkbox"/> L4189
AUSTRALIAN STANDARD		
	2 P+E 10 A 250 VAC socket - safety socket, shuttered and auto switched - 2 modules	<input type="checkbox"/> N4132 <input checked="" type="checkbox"/> NT4132 <input checked="" type="checkbox"/> L4132
	2 P+E 15 A 250 VAC socket - safety socket, shuttered and auto switched - 2 modules	<input type="checkbox"/> N4133 <input checked="" type="checkbox"/> NT4133 <input checked="" type="checkbox"/> L4133
BRAZILIAN STANDARD		
	10 A socket with shielded tulip contacts	<input type="checkbox"/> N4165 <input checked="" type="checkbox"/> L4165
	10 A socket with unshielded tulip contacts	<input type="checkbox"/> N4165S <input checked="" type="checkbox"/> L4165S
	20 A socket with shielded tulip contacts	<input type="checkbox"/> N4166 <input checked="" type="checkbox"/> L4166
	20 A socket with unshielded tulip contacts	<input type="checkbox"/> N4166S <input checked="" type="checkbox"/> L4166S
	3P 20 A socket	<input type="checkbox"/> N4194 <input checked="" type="checkbox"/> L4194

2. RANGE (continued)

BRITISH STANDARD		Cat. No.
	Socket outlet 2 modules - 13 AMP (items conform to BS 1363)	<input type="checkbox"/> N4150 <input checked="" type="checkbox"/> NT4150 <input checked="" type="checkbox"/> L4150
	Shaver supply units double voltage 115/230 V output 50/60 Hz input - complete with white cover plate (no colour choice)	<input type="checkbox"/> N4178 <input checked="" type="checkbox"/> NT4178
EGYPTIAN STANDARD		
	2 P 10 A 250 Vac socket - contact tubes Ø 4 - 4.8 mm Centre line of holes 19 mm - 1 module	<input type="checkbox"/> N4122ET <input checked="" type="checkbox"/> NT4122ET <input checked="" type="checkbox"/> L4122ET
SWISS STANDARD		
	2 P+E 10 A 250 Vac socket - 1 module	<input type="checkbox"/> N4164/12 <input checked="" type="checkbox"/> NT4164/12 <input checked="" type="checkbox"/> L4164/12
	2 P+E 10 A 250 Vac socket - 2 modules	<input type="checkbox"/> N4164/13 <input checked="" type="checkbox"/> NT4164/13 <input checked="" type="checkbox"/> L4164/13
ISRAELI STANDARD		
	2 P+E 10/16 A 250 Vac socket - 2 modules	<input type="checkbox"/> N4183 <input checked="" type="checkbox"/> NT4183 <input checked="" type="checkbox"/> L4183
Colours code: <input type="checkbox"/> White <input checked="" type="checkbox"/> Tech <input checked="" type="checkbox"/> Anthracite		

3. OVERALL DIMENSIONS (mm)



	A	B	C	D
1 module	22	44	27*	11*
2 modules	44	44	27*	11*
3 modules	66	44	47	13

*Average overall dimensions depending of the standard.

4. CONNECTION

Screw clamps:

Stripping length, rigid or flexible cables: 9 mm

Automatic clamps:

Stripping length, rigid or flexible cables: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
 Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate
 Colour: Anthracite, White, Tech
 Halogen free.
 UV resistant.

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC
 Current: depending of the choice of the socket

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.