



Epure Style Lighting control switches 20 AX

Cat. No(s): AR68007/08/09 - AR68107/08/09 - AR68207/08/09
 AR68307/08/09 - AR68407/08/09

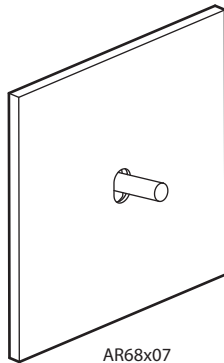

AR68x07

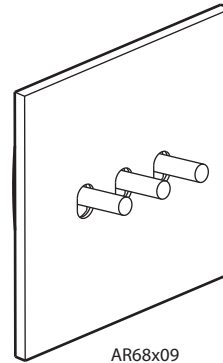

AR68x09

1. USE

Lighting control push-buttons complete delivered, with compact mechanisms for maximum wiring space, front plates and control units.
 For flush-mounting, back box to be min. 35 mm deep.
 Fixing with screws.

2. RANGE

1 gang - 2-way switch

AR68007	<input type="radio"/> Configured Cat. No
AR68107	<input type="radio"/> Brushed steel
AR68207	<input type="radio"/> Brushed gold
AR68307	<input type="radio"/> Satin white
AR68407	<input checked="" type="radio"/> Matt black

2 gang - 2-way switch


AR68008	<input type="radio"/> Configured Cat. No
AR68108	<input type="radio"/> Brushed steel
AR68208	<input type="radio"/> Brushed gold
AR68308	<input type="radio"/> Satin white
AR68408	<input checked="" type="radio"/> Matt black

3 gang - 2-way switch

AR68009	<input type="radio"/> Configured Cat. No
AR68109	<input type="radio"/> Brushed steel
AR68209	<input type="radio"/> Brushed gold
AR68309	<input type="radio"/> Satin white
AR68409	<input checked="" type="radio"/> Matt black

Note: Other finishes and styles are provided, see technical data sheet F02217EN.

3. OVERALL DIMENSIONS (mm)

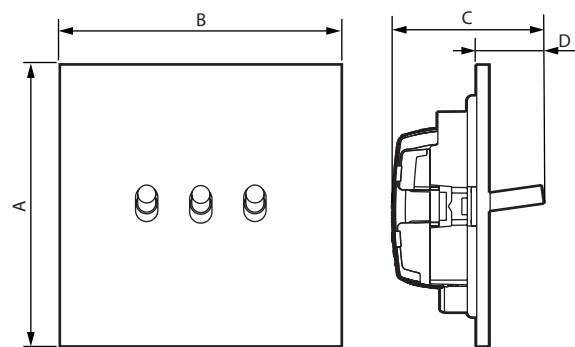

Cat. Nos	A	B	C	D
AR68x07/08/09	86	86	46	21

4. DISMANTLING

The plates can be dismantled by inserting the tip of a screwdriver in a purpose-designed notch on the sides of the plate and using it as a lever to unclip it from the fixing points.

Once the plate has been lifted off the wall slightly, just slide your fingers between the plate and the wall to gently remove the plate.

Take care not to pull too hard on the plate, to avoid breaking the fixing clips.

5. CONNECTION

Type of terminals : with screws

Terminal capacity: 3 x 2.5 mm² - 2 x 4 mm² - 1 x 6 mm²

Stripping length: 12 mm

Compatible with flexible or rigid cables.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Impact tests: IK02

Penetration by solid bodies/liquids: IP20

■ 6.2 Material characteristics

Plates and rockers:

• Decorative brass: AR68107/08/09 - AR68207/08/09

• Brass + paint: AR68307/08/09 - AR68407/08/09

Mechanism housing: PP

Support: steel with surface treatment

Halogen-free

UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 6.3 Electrical characteristics

Voltage: 250 V~

Current: 20 AX

Max power for self-ballasted lamps: 250 W

Frequency: 50/60 Hz

■ 6.4 Climate characteristics

Storage temperature: - 10°C to + 70°C

Usage temperature: - 5°C to + 35°C

7. CARE

■ 7.1 Installation

To protect the products, it is essential to install them:

- once all surface coatings are completely dry,
- in a dry, non-aggressive environment,
- indoors only.

It is recommended that you install the plates only after the wall coatings have been completely finished (paint, fabrics, etc.).

■ 7.2 Instructions

Clean and dust using a soft, damp cloth (dampened with water) or wipes impregnated with a product containing less than 5% alcohol and anionic surfactant.

■ 7.3 Banned products

- solvents, various essential oils, paint, or adhesive tape,
- scouring powders (because are abrasive),
- products containing bleach,
- special products for stainless steel,
- renovators (because they often contain abrasives and chemical agents),

Caution: Always test before using other special cleaning products. Any mechanical attack or foreign object (screwdriver, etc.) striking the surface of the plate would damage the finish and therefore also the surface treatment.

- splashes or fumes from floor, paint, or wood stripping products, etc.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e.catalogue.