



Arteor™ Advance 30W USB charger Power delivery - Type C+C

Cat. No(s): AC3406MW/MB/MT/CH/DB/RS
AA3406MW/MB/MT/CH/DB/RS



AC3406MW/MB/MT/CH/DB/RS



AA3406MW/MB/MT/CH/DB/RS

1. USAGE

Allows you to power and charge multimedia terminals: PC, tablets, smartphones.

USB Power Delivery and Quick charge are new fast charging technologies built into iOS/Apple and Android/Google devices.

Technologies enabling a faster charging level than conventional technologies, operating via an exchange between the terminal and the charger.

To be equipped with support frame and finishing plate.

2. RANGE


30W USB charger - Type C+C

2 USB Type-C (2 Type-C outputs)

2 modules

Matt White	Matt Black	Matt Titanium
AC3406MW	AC3406MB	AC3406MT
AA3406MW	AA3406MB	AA3406MT
Champagne	Dark Bronze	Rose
AC3406CH	AC3406DB	AC3406RS
AA3406CH	AA3406DB	AA3406RS

3. DIMENSIONS (mm)

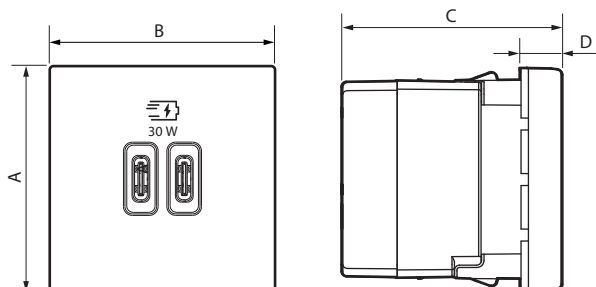

A	B	C	D
45	45	45	8.5

4. CONNECTION

Type of terminals: with screws

Terminal capacity: 2 x 2.5 mm²

Stripping length: 6 mm

Screwdriver: flat 3.5 mm

Circuit breaker: 16 A MAX.

Necessary safety precautions:



Switch OFF the power at the main circuit breaker.
Make sure that the power is OFF before continuing with the installation.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies and liquids: IP 40

■ 5.2 Material characteristics

Mechanism casing: PC

Cover: ABS

Halogen-free

UV-resistant

Self-extinguishing:

PC UL 94 V0

650°C/30 s for other insulating components.

■ 5.3 Climate characteristics

Storage temperature: -20°C to +70°C

Usage temperature: +5°C to +35°C

5. TECHNICAL CHARACTERISTICS (continued)

■ 5.4 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240V~	
Nominal input frequency	50/60Hz	
Max. output power	30.0W	
Nominal input current	0.5A	
Max. nominal output current	3.0A	
Nominal output voltage	5.0 V~ *	
Average efficiency in active mode	88% → 1 output	85% → 2 outputs
Stand-by power consumption	0.08W	
Consumption class without load and average level of efficiency: Level VI		
Protection class	II - Low voltage	

*Optimise/voltage:	
1 output	
5.0V~	3.0A
9.0V~	3.0A
12.0V~	2.5A
15.0V~	2.0A
20.0V~	1.5A

*Optimise/voltage:	
2 outputs	
C1: 5.0V~	2.4A
C2: 5.0V~	2.4A

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.
Resistance to the following agents:
Hexane, methylated spirits, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning product.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e.catalogue.