



Surface-mounted power sockets Double-pole switch or two-way switch or changeover switch

Cat. No(s): 0 860 18L
0 861 18L



0 861 18L



0 860 18L

1. USE


Power sockets 16 A conforming to french standard.
Devices supplied complete or modular mechanisms

2. RANGE


| Description | Comple Unit | Modular component |
|---|-------------|-------------------|
| Double-pole switch or two-way switch or changeover switch | 0 860 18L | 0 861 18L |

3. OVERALL DIMENSIONS (mm)

■ Complet unit

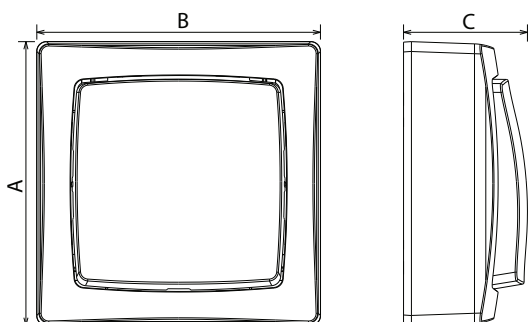

■ Modular component



3. OVERALL DIMENSIONS (mm) (continued)

| References | A | B | C |
|------------|------|------|------|
| 0 860 18L | 72 | 72 | 31.5 |
| 0 861 18L | 54.5 | 54.5 | 29.5 |

4. CONNEXION

Terminal type: automatic
Terminal capacity: from 1.5 mm² to 2.5 mm² (1 or 2 conductors)
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Protection against solid bodies and liquids: IP 31D (complete product)
Protection against mechanical impact: IK 04

■ 5.2 Material characteristics


Frame, support: ABS
Cover plate: PC
UV resistant
Halogen-free

Self-extinguishing:

+ 850° C / 30 s for insulating components holding in place live parts.
+ 650° C / 30 s for the other insulating components.

■ 5.3 Electric characteristics

Voltage: 250 Vac
Current: 10 AX
Fréquency: 50 Hz
Maximum power on integrated ballast lamps: 100 W
Frequency: 50 Hz



■ 5.4 Climatic characteristics

Operating temperature: -10° to +40°C
Storage temperature: -25°C to +60°C

Surface-mounted power sockets

Double-pole switch or two-way switch or changeover switch

Cat. No(s): 0 860 18L
0 861 18L

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane, Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e.catalogue