



Epure Style Contactless switch for lighting

Cat. No(s): AR-M67061 - AR-P67361 - AR-P67461 -
AR-P67861 - AR-P67961



AR-M67061



AR-P67361

1. USE

Switches the light on or off by simply passing a hand in front of the switch
Detection distance: approximately 6 cm

Can be used as:

- Simple switch: wired with or without neutral
- 2-way switch: must be wired with neutral
- Master/slave: must be wired with neutral, 3 slaves max.
- NO pushbutton: must be wired with neutral, for controlling a relay, latching relay

For installation in any type of box.

Mechanism supplied with protection cover.

2. RANGE

Cat. Nos	Switch
AR-M67061	Contactless switch for light. With illuminated indicator, active by default (can be deactivated). To be equipped with a finishing plate.
2,5 wire contactless plate	
AR-P67361	● Bronze
AR-P67461	○ Brushed steel
AR-P67861	● Matt black
AR-P67961	○ Satin white

3. ASSEMBLY

Art d'Arnould electrical wiring accessories are supplied with standard 30 mm fixing screws. It is possible to use longer 40 mm screws (not supplied). Remove the screws from the flush-mounting box and use those supplied with the wiring accessory.

To protect the products, it is essential to install them: once all surface coatings are completely dry, in a dry, non-aggressive environment, indoors only.

It is strongly recommended that you leave the protection cover in place until the plates are fitted.

Installation of the plates is advisable once the wall finishes (paint, fabrics, etc.) have been fully completed.

3. ASSEMBLY (continued)

Dismantling:

The plates can be dismantled by inserting the tip of a screwdriver in a purpose-designed notch on the sides of the plate and using it as a lever to unclip it from the fixing points.

Once the plate has been lifted off the wall slightly, just slide your fingers between the plate and the wall to gently remove the plate.

Take care not to pull too hard on the plate, to avoid breaking the fixing clips.


4. CONNECTION

Terminal type: with screws

Terminal capacity: 2 x 2.5 mm²


Stripping length: 8 mm

5. DIMENSIONS (mm)

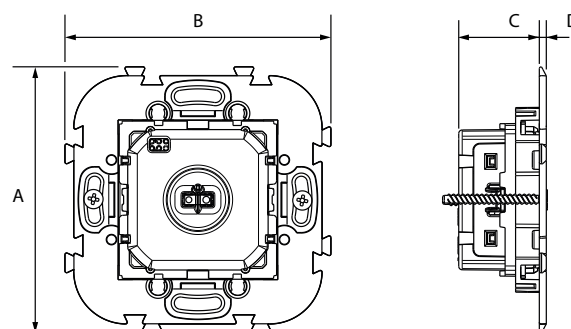

Cat. Nos	A	B	C	D
AR-M67061	76,2	76,2	23,3	2,3

5. DIMENSIONS (mm) (continued)

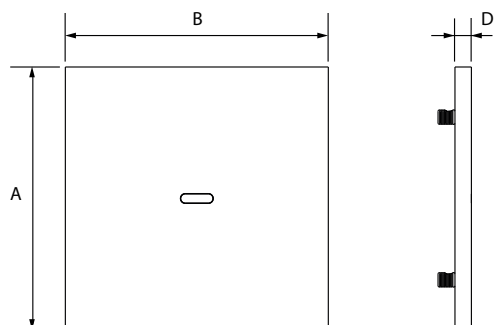

Cat. Nos	A	B	C
AR-P67361 AR-P67461 AR-P67861 AR-P67961	80	80	5

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Impact tests: IK 04

Protection against solid bodies and liquids: IP 40

■ 6.2 Caractéristiques matières

• Contactless switch :

Support frame: PA 6.6 + Galfan steel

Mechanism casing: PC

Sub-plate: PC

Halogen-free

UV-resistant

• Plates:

Bronze: brass + oxidation + patina and brushed + varnish

Brushed steel: brushed + galvanised with steel colour + varnish

Matt black: brass + matt paint

Satin white: brass + satin-finish paint

Self-extinguishing:

• 850°C/30 s for insulating components holding live parts in place

• 650°C/30 s for other insulating components

■ 6.3 Electrical characteristics

Voltage: 110-240 V~

Power: 200 VA

Frequency: 50/60 Hz

■ 6.4 Climate characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +35°C

7. CARE

Clean and dust using a soft, damp cloth (dampened with water) or wipes impregnated with a product containing less than 5% alcohol and anionic surfactant.

Caution: Always test before using other special cleaning products.

Banned products:

- Solvents, various essential oils, paint, or adhesive tape,
- Scouring powders (because are abrasive),
- Products containing bleach,
- Special products for stainless steel,
- Renovators (because they often contain abrasives and chemical agents),
- Splashes or fumes from floor, paint, or wood stripping products, etc.

Caution:

Any mechanical attack or foreign object (screwdriver, etc.) striking the surface of the plate would damage the finish and therefore also the surface treatment.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e.catalogue.